

Bagoti

Architectural Outdoor & Commercial Lighting



CATALOGUE 2023-24



COMPANY PROFILE

Trilok Chand & Sons was established in Lahore on April 13, 1920. Founded by Shri Trilok Chand Kumar, the company began as an electrical trading house and has since expanded its foray. The British India Corporation was one among many of its clients.

Under the Companies Act in 1945, the firm was renamed Trilok Chand & Sons Limited and later became Trilok Chand & Sons Private Limited. In 1947, a country branch was established in Kanpur in 1947. Over the years, as the company grew, branches were established in Kolkata, New Delhi and Chandigarh. Later, an allied manufacturing unit named Tricolite Electrical Industries was built in New Delhi in the 1980s. It produces electrical switchboards and custom made panels. The company is a supplier for various renowned manufacturers such as G.E.C, Phillips, Siemens, AEI, Crompton, MEI etc.

The company deals in luminaires, lamps, tubes, cables, induction motors, switchgears and other allied items. The company became the sole distributor in Uttar Pradesh of luminaires manufactured in Mumbai by the Daylight Fixtures Corporation, the first manufacturer of luminaires in the country in 1950s.

In the early 60s, the company was appointed the sole distributor for luminaires in Delhi, Punjab, Haryana and Himachal Pradesh by Glolite Industries Private Limited. The company was the leading marketing house in luminaires and one of the first to enter into a rate contract with DGS & D, the central purchase organization on the Indian Government in New Delhi. The company has maintained its number one position over the years.

The company manufactures and imports electrical fixtures by the brand name of Bagoti (outdoor landscaping architectural fixtures) and Trulite (indoor commercial fixtures).

Trulite has to its credit a list of prestigious projects. DLF and Unitech, the two largest real estate developers in India, are loyal customers of the company. The firm has done over 30 projects with Unitech and over 80 projects with DLF. Five projects with DLF are underway. The projects are across India – in West Bengal, Tamil Nadu, Andhra Pradesh, Kerala, Madhya Pradesh, Uttar Pradesh and Himachal Pradesh.

At Trulite, we understand the demands of various industries and cater to different needs. We value attention to detail and follow a user centric approach in production. The talented team and modern production facilities have contributed to Trulite becoming the leading manufacturer and exporter of lighting systems.



URBAN LIGHT



BOLLARDS



STREET LIGHT



WALL LIGHT



FLOOD LIGHT



NEON SERIES



FYZT-8318 at DLF Aralias (Gurgaon in 2006)



FYZT-8318 at DLF Emporio Mall (Delhi)



ABORE at DLF South Court Mall, Saket (Delhi)



ABORE at Karmalake Lands, Sector-80 (Gurgaon)



FYZD-132 Streetlight, lighting column at The Pinnacle, Golf Course Road (Gurgaon)



ABORE at UNI World Resort (Gurgaon)



HAMMER at DLF Sky Court, Sector-86 (Gurgaon)



HAT FYZT-501 suspended fixture at DLF Crest (Gurgaon)



FYZT-3049 at DLF The Primus, Sector-82A, (Gurgaon)



FYZT-3049 at Hilton Garden Inn, Saket (Delhi)



FYZT-3049 UNITECH Cascades (Greater Noida in 2005)



FYZT-3049S at Nirvana, UNITECH Soth City-II, (Gurgaon in 2006)



FYNF NEON STRIP at FOB-1 DLF Cyber City (Gurgaon)



FYNF NEON STRIP at FOB-1 DLF Cyber City (Gurgaon)



FYNF NEON STRIP at FOB-2 DLF Cyber City (Gurgaon)



FYNF NEON STRIP at FOB-2 DLF Cyber City (Gurgaon)



FYZT-8021 POST TOP at UNI World City, Sector-30 (Gurgaon in 2004)



FYZT-8021 POST TOP at Queen's Court, GK-II (Delhi in 2012)



FYZT-8001 LIGHTING COLUMN at DLF Cyber City (Gurgaon)



WING FYZT-116 LIGHTING COLUMN at Noida Amusement Park (Noida)



Company showroom in China



CURVE LIGHTING COLUMN at DLF Magnolias (Gurgaon in 2011)



IRON STREETLIGHT at DLF Alameda, Sector-73 (Gurgaon in 2011)



FYZT-8022 POST TOP at The Pinnacle, Phase-V (Gurgaon)



PENSIL LIGHTING COLUMN at Star Mall (Gurgaon in 2009)



HOOD TL91-03 at DLF Park Place (Gurgaon)



ABORE STREETLIGHT at DLF Skycourt, Sector- 86 (Gurgaon)



TLGT-603 LIGHTING COLUMN at DLF Magnolias (Gurgaon)



SHUTTLE STREETLIGHT at Gautam Buddha University (Greater Noida)



CANDLE Indirect lighting column at Shenzhen (China)



FYZD-797 STREETLIGHT at DLF Emporio Mall (Delhi)



WING FYZT-116 LIGHTING COLUMN at DLF Mega Mall (Gurgaon)



DLF Skycourt, Manesar (Gurgaon)



FYNF NEON STRIP at FOB-2 DLF Cyber City (Gurgaon)



In-ground fixture at DLF Skycourt (Gurgaon)



PIPE WALL LIGHT at DLF The Primus, Sector-82A, (Gurgaon)



FYZD-797 Streetlight Lighting Column at DPS School (Chennai)



VICTORIA post-op at DLF OMR (Chennai)



Urban Light

Urban light

SUN SHINE SERIES



Special Mould
Generation 4

Features:

- The SUNSHINE SERIES luminaire combines efficiency, aesthetics and visual comfort.
- With timeliness elegance and its high performance photometry, this luminaire is a distinctive light tool.
- Decorative units from this range can be effectively used in many applications from residential streets to amenity areas.
- SUNSHINE SERIES offers a complete solution to light urban spaces with superior efficiency and a striking design.



Specifications:

- High strength, anti corrosion, die-cast aluminium body
- Tempered toughened glass except SUN DROP with vandal resistant polycarbonate heat formed protector.
- Available with a range of high performance optics giving excellent photometric results



Shanghai, China



Shanghai, China





Shanghai, China

Code	Power	Lumen	CCT	CRI
SUN LEG				
40W-80W	40W/60W/80W	3895lm/5885lm/7520lm	5500K/4000K/3000K	>80
SUN DROP				
35W-100W	35W/65W/100W	2619lm/4615lm/7862lm	5500K/4000K/3000K	>80
SUN BRIGHT				
40W-100W	40W/60W/100W	3200lm/5400lm/8000lm	5500K/4000K/3000K	>80
SUN RISE				
35W-100W	35W/65W/100W	2287lm/4832lm/7892lm	5500K/4000K/3000K	>80
SUN WIN				
35W-100W	35W/65W/100W	2287lm/4832lm/7892lm	5500K/4000K/3000K	>80
SUN ARM				
35W-100W	35W/65W/100W	2287lm/4832lm/7892lm	5500K/4000K/3000K	>80
SUN SET				
35W-100W	35W/65W/100W	2287lm/4832lm/7892lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k

SUN LEG






SUN DROP



SUN BRIGHT



SUN RISE

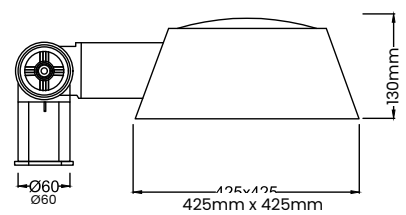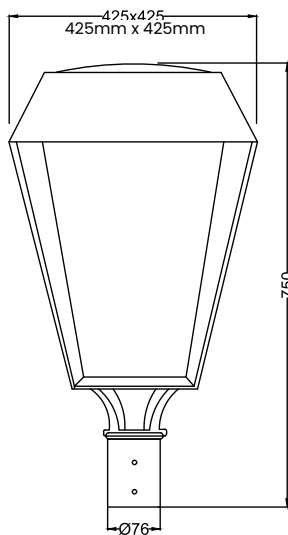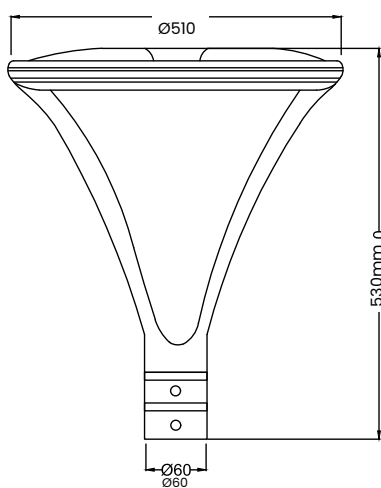




SUN WIN



SUN ARM



SUN SET

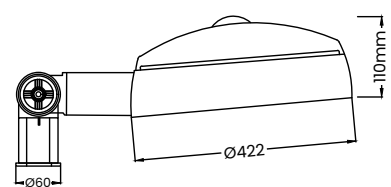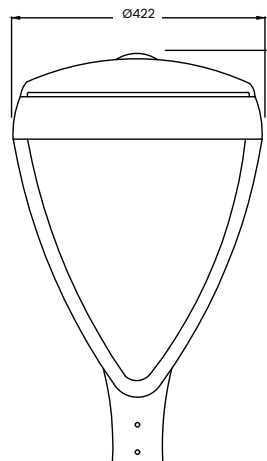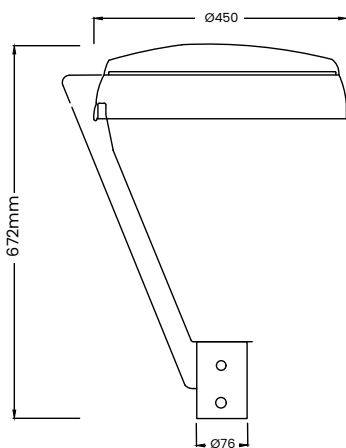

Urban light

CROWN SERIES

Special Mould

Generation 4



Features:

- The CROWN Collection is a range of luminaires that provide an integrated aesthetic for urban environments.
- The Post-top, Suspended and Wall Bracket are made of stainless steel for a clean, modern look.
- The CROWN column adds a distinctive architectural element to any streetspace or building site.



Specifications:

- The CROWN is made of die cast aluminium and also available in RTP (Reinforced Technical Polymer) which is vandal proof, shock proof and corrosion proof.
- Available in any RAL color on request (Customization as per its requirement)
- Available in wall bracket, suspended and post-top.




900 mm

CROWN - N



900 mm

CROWN - NII



480 mm

Code	Power	Lumen	CCT	CRI
CROWN				
30W-60W	30W-60W	2400lm-5400lm	500K/4000K/3000K	>80

*Lumens calculated on 3000k



CROWN - P



CROWN - WB NII



CROWN - WB - C

CAST IRON COULMN WITH EMBELISHMENTS



CI-01



CI-02



CI-03



CI-04



CI-05



CI-06



CI-07



CI-08



CI-09



CI-10




CI-11

All our lighting columns have demonstrated its resistant qualities and durabilities for centuries. It has proved it's worth in the most severe and extreme climatic conditions.

All the cast iron/aluminium elements are treated using a painting process that optimises their anti-rust protection and gives them a very attractive finish with the final touch of teflon coating.




CAST IRON POLE BOTTOMS

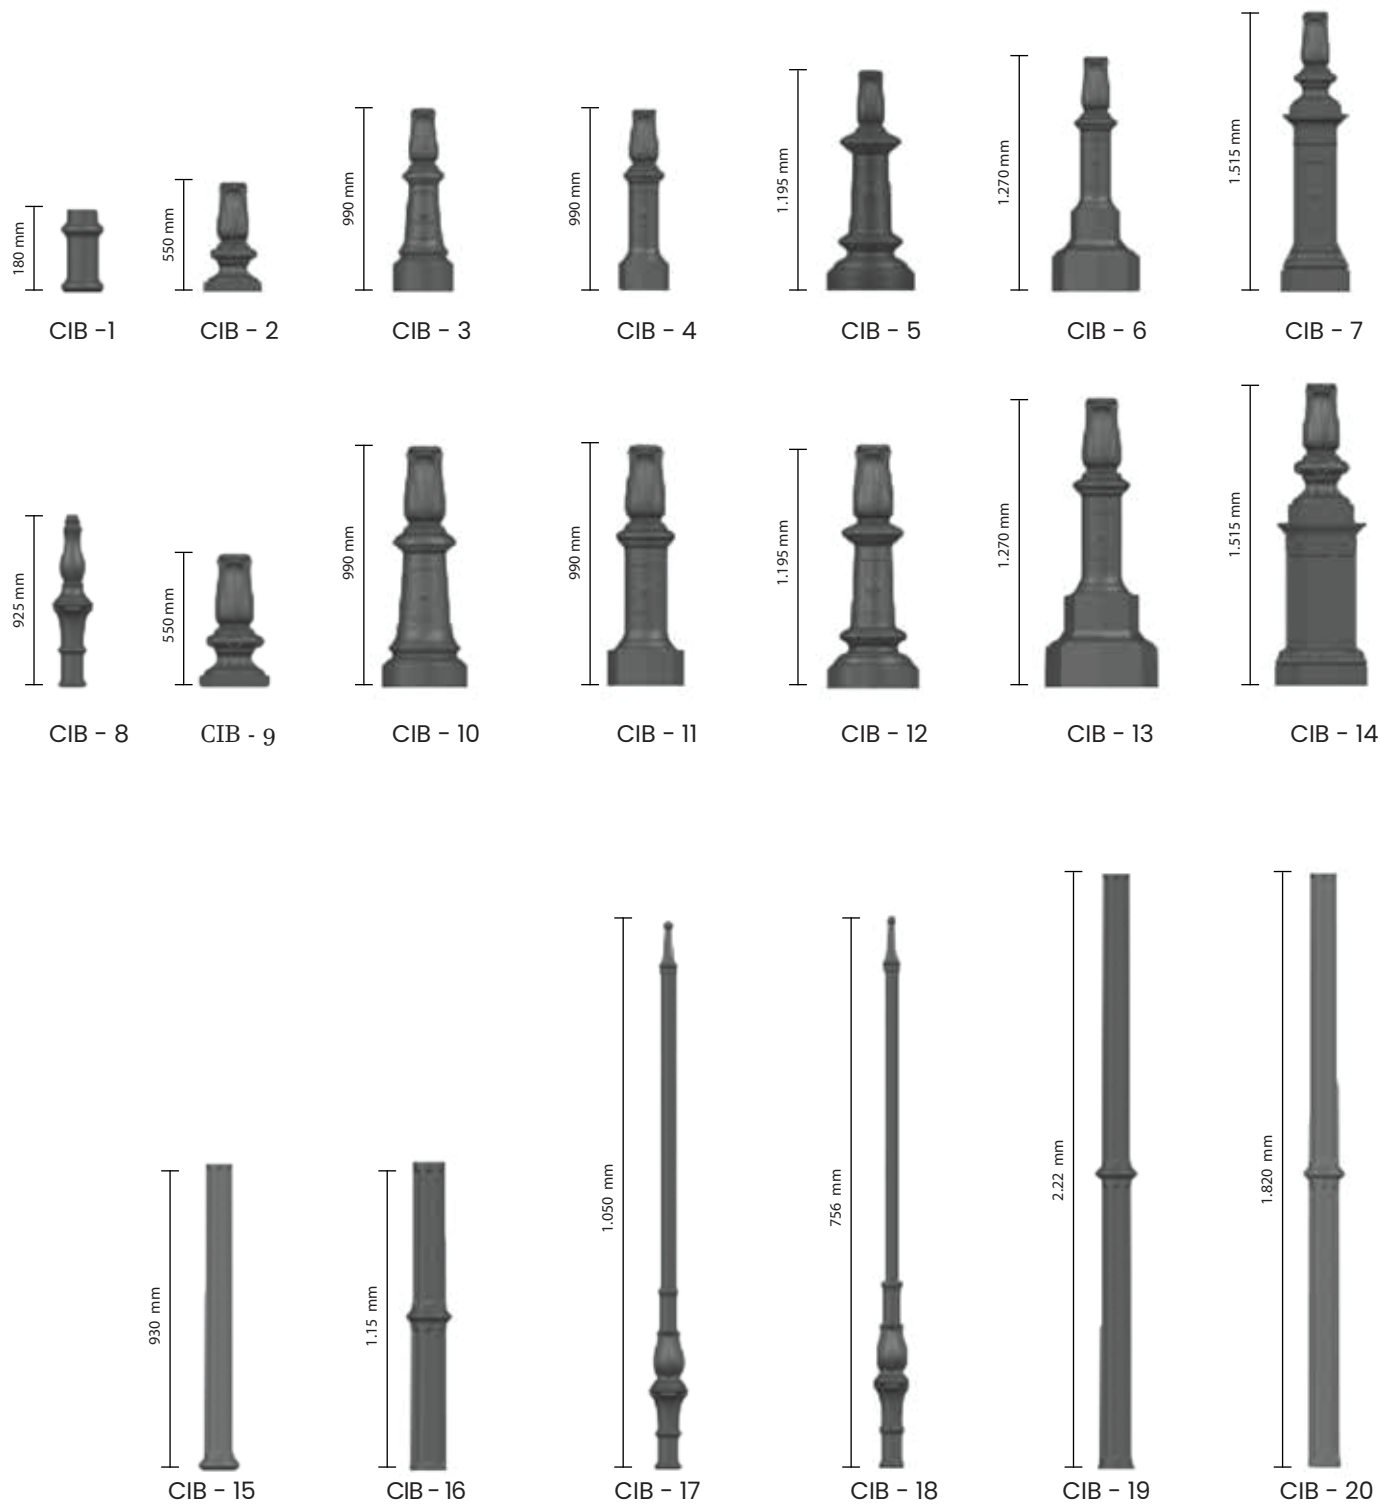


CAST IRON BRACKETS

CWB - 1

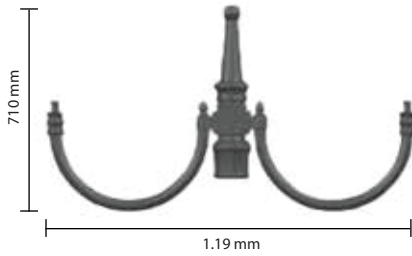


CWB - 2

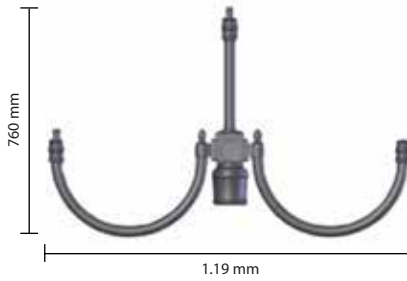


CWB - 3




CWB - 4

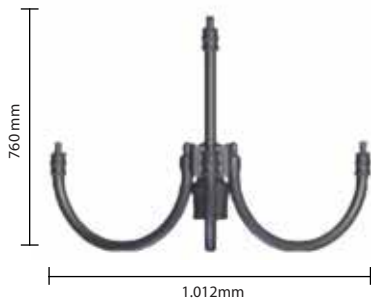


CWB - 5

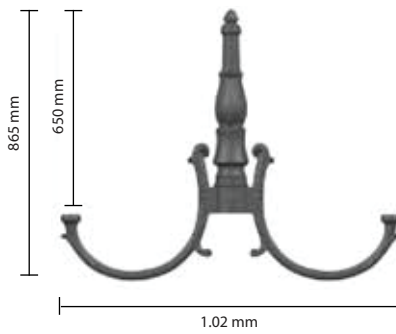


CWB - 6

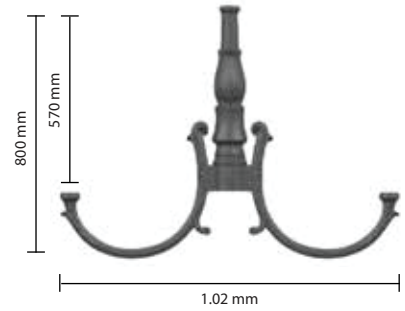


CWB - 7

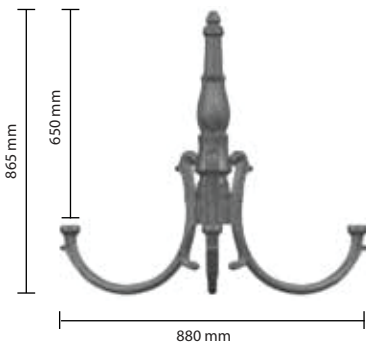


CWB - 8

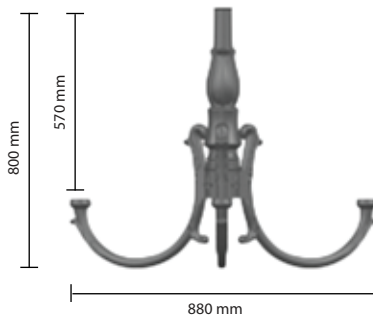


CWB - 9

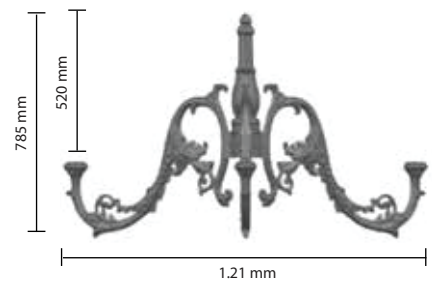


CWB - 10

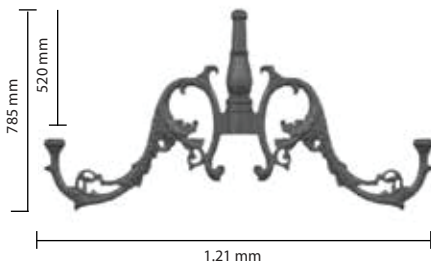

CWB - 11

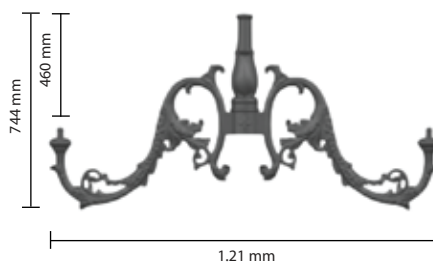

CWB - 12

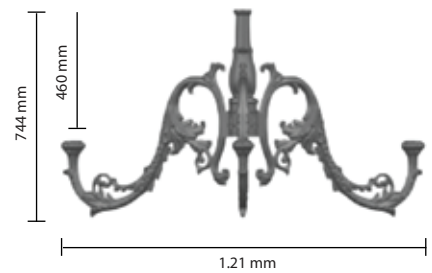

Urban light

PULCRA SERIES

Special Mould

Generation 4





Features:

- Fusion of ultra-modern design adding an aesthetic feature to the landscape.
- Sleek design using state of the art technology with high efficiency and energy saving design.
- PULCRA SERIES offers a complete solution to light urban spaces with superior efficiency and a striking design.
- Combination of asymmetrical and symmetrical optical system for a wide variety of landscaping requirements.
- Decorative sleek arm gives aesthetic to the environment.



Specifications:


- High strength, anti corrosion, die-cast aluminium body.
- Tempered toughened glass except PULCRA POST TOP- F and PULCRA LEG -F with vandal resistant polycarbonate heat formed protector.
- Available with a range of high performance optics giving excellent photometric results.

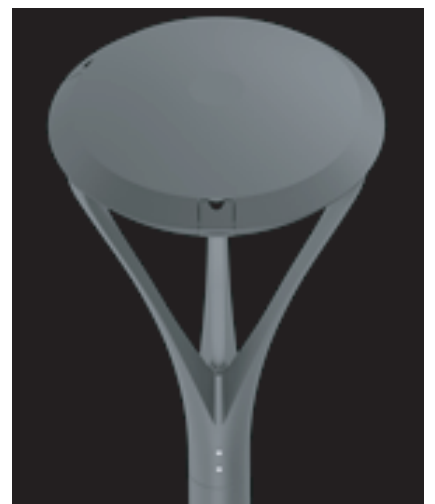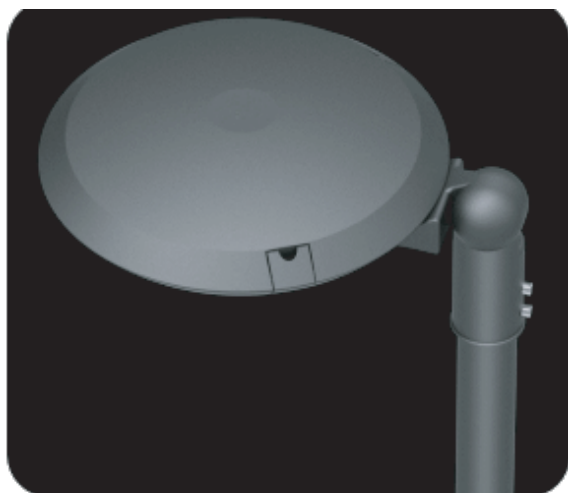


Code	Power	Lumen	CCT	CRI
PULCRA ADJUSTABLE				
30W-80W	30W/60W/80W	3000lm/6000lm/8000lm	5500K/4000K/3000K	>80
PULCRA POST TOP-F				
30W-60W	30W/60W	2700lm/5400lm	5500K/4000K/3000K	>80
PULCRA LEG				
30W-60W	30W/60W	3000lm/6000lm	5500K/4000K/3000K	>80
PULCRA LEG-F				
30W-60W	30W/60W	2700lm/5400lm	5500K/4000K/3000K	>80
PULCRA ARM				
30W-80W	30W/60W/80W	3000lm/6000lm/8000lm	5500K/4000K/3000K	>80
PULCRA H				
30W-80W	30W/60W/80W	3000lm/6000lm/8000lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k

PULCRA ADJUSTABLE

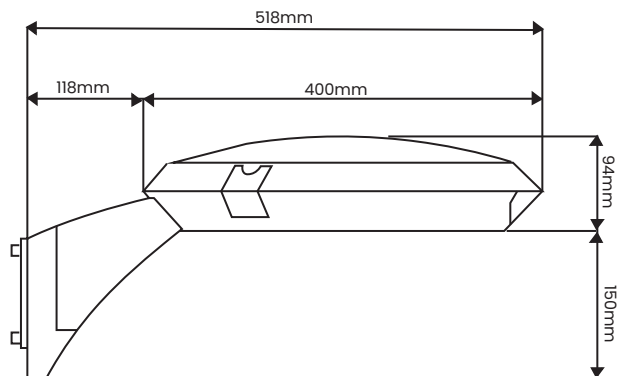



PULCRA POST TOP-F

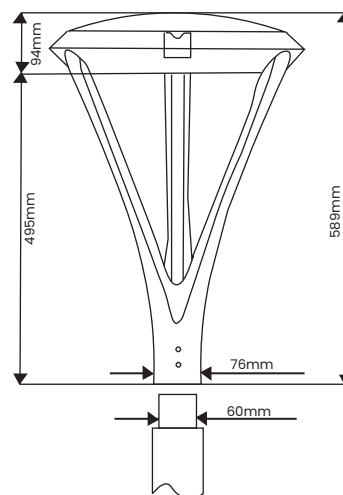

PULCRA LEG




PULCRA LEG -F

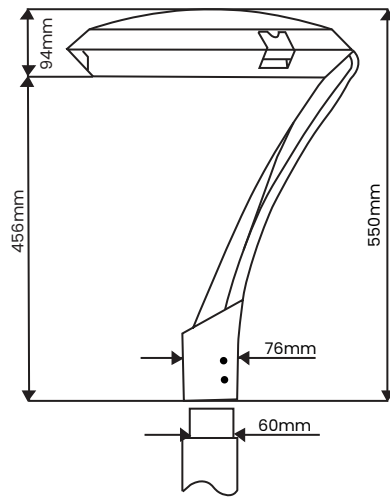


Shanghai, China

PULCRA ARM

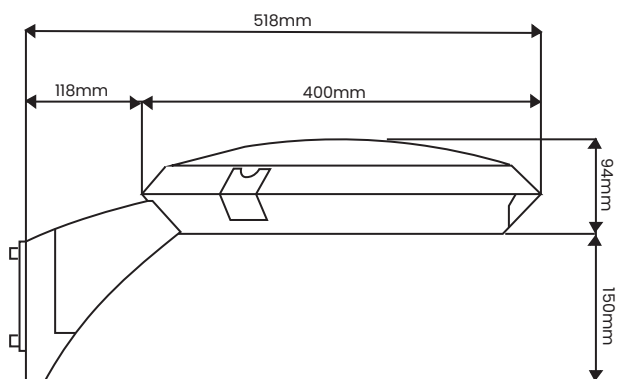

PULCRA H

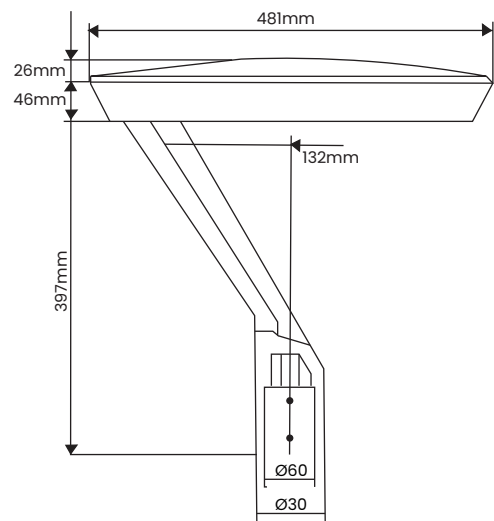

Shanghai, China

Urban light

SERIE SERIES



SERIE-F



SERIE-FS



SERIE-T



SERIE-TS

Features:

- The SERIE Collection is a range of classic post top or suspended lantern with high performance street optic, ideal for historical urban areas.
- Precise light distribution ensures no direct upward light.
- Optional illuminated decorative top cap also available.
- Complementary 'Modern' lanterns available which allows visual consistency through a variety of urban zones.
- These classic designs are quite appropriate for contemporary urban environments and can also be used for lighting parks, playgrounds, lay-bays, car parks.




Specifications:

- The base is made of die-cast aluminium body.
- Available in any RAL color (Customized as per site requirement).
- Available in wall bracket, post-top and a suspended luminaire.

Code	Power	Lumen	CCT	CRI
SERIE				
30W-80W	30W-80W	3000lm-8000lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k

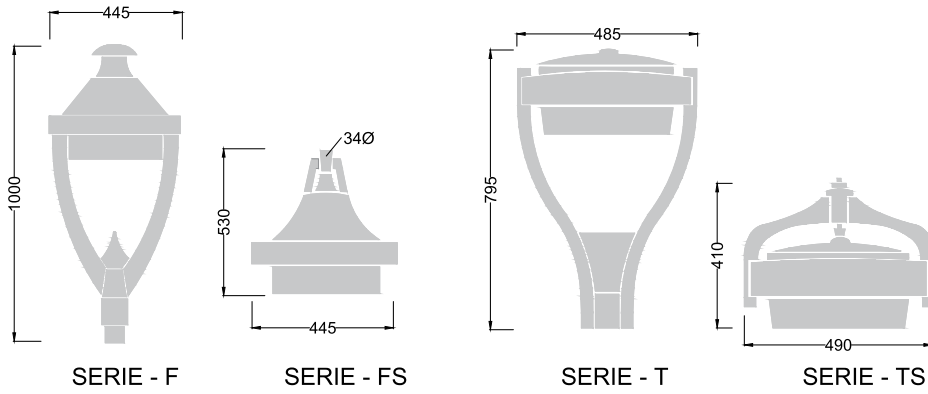



Urban light

PUNTO SERIES

Special Mould

Generation 4



Features:


- This elegant indirect cylindrical-conical lighting column is deflected by the top thick reflector.
- This deflection has the effect of distributing the light in an extremely soft and uniform way, effectively removing the glare.
- A sealed optical compartment is positioned on the lighting column made of die-cast aluminium / galvanised steel.
- Indirect lighting column is topped by a mirror finished parabolice reflector, also available in white finish.




Specifications:

- The top reflector is available in different sizes and shapes made out of aluminium finished in white/ faceted mirror reflector.
- Also available in mirror.
- Available from 3mtr - 5mtr.




PUNTO I

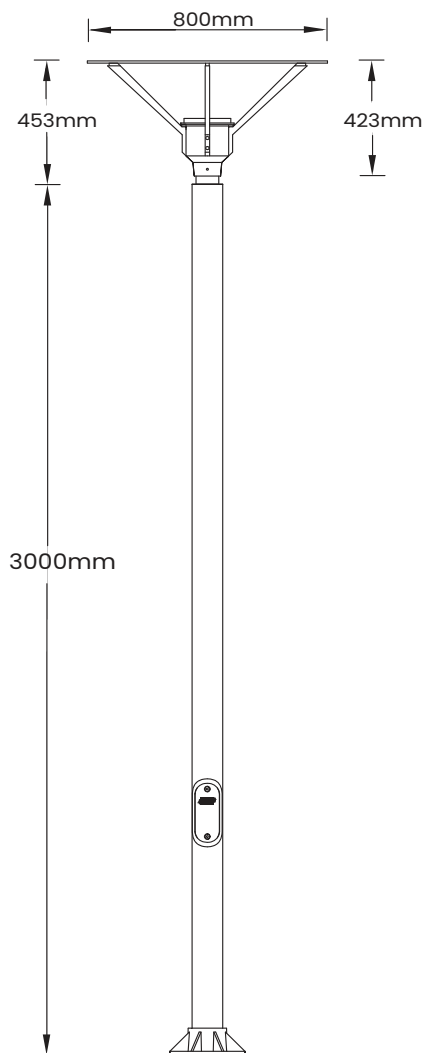

PUNTO II

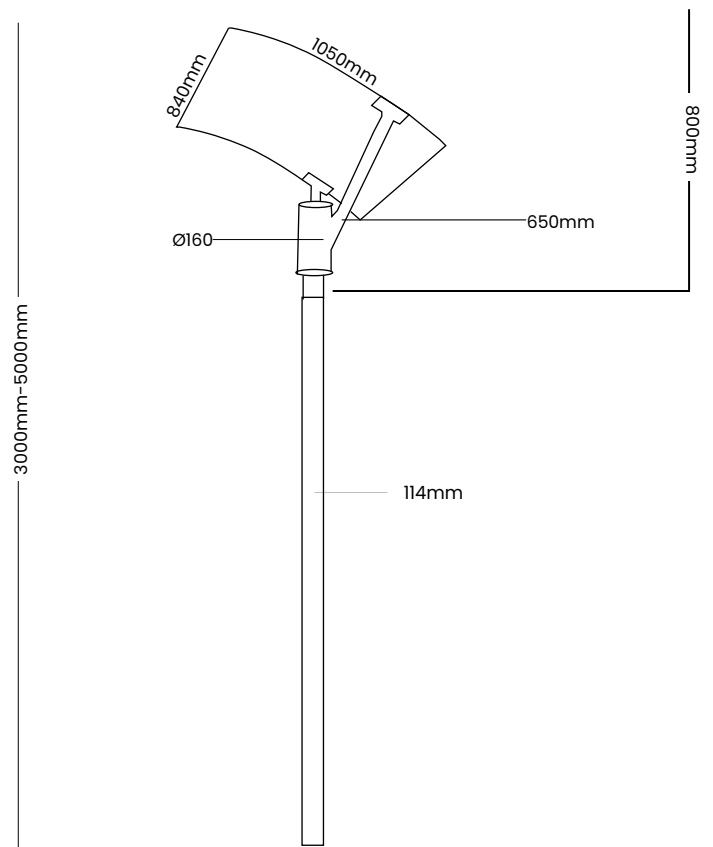

PUNTO III

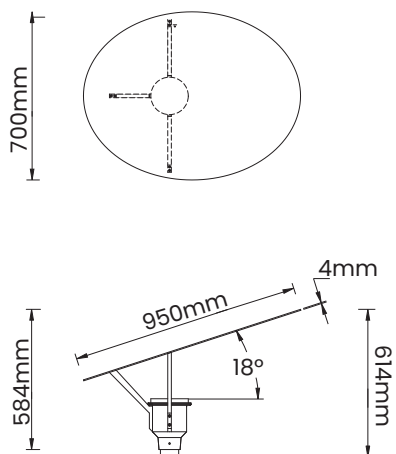

Spigot post top



Urban light

Code	Power	Lumen	CCT	CRI
PUNTO				
PUNTO-S/I	30W-80W	2400lm-6400lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k



Urban light

BULLET SERIES

Special Mould
Generation 4



Features:


- Multi-functional architectural fixture.
- Fusion of ultra-modern design adding an aesthetic feature to the landscape.
- Choice of innovative bracket designs.
- Monochrome and RGBW program options according to customer requirements after a high degree of customisation.
- Ideal choice for outdoor building and landscape lighting.
- The BULLET Series symbolises an opening towards new paths in aesthetics while providing high photometric performance.

The BULLET range of luminaires combines 4 models-pole mounted, bollard, wall mounted and tree strap, available in different wattages with 3 sizes.



Specifications:

- The BULLET Series are made of high strength, safe, reliable die-cast aluminium.
- The transparent cover adopts high light transmittance toughened glass.
- Available in any RAL color (Customization as per site request)
- Light angle is from 5 degrees to 60 degrees with a hood to avoid glare.

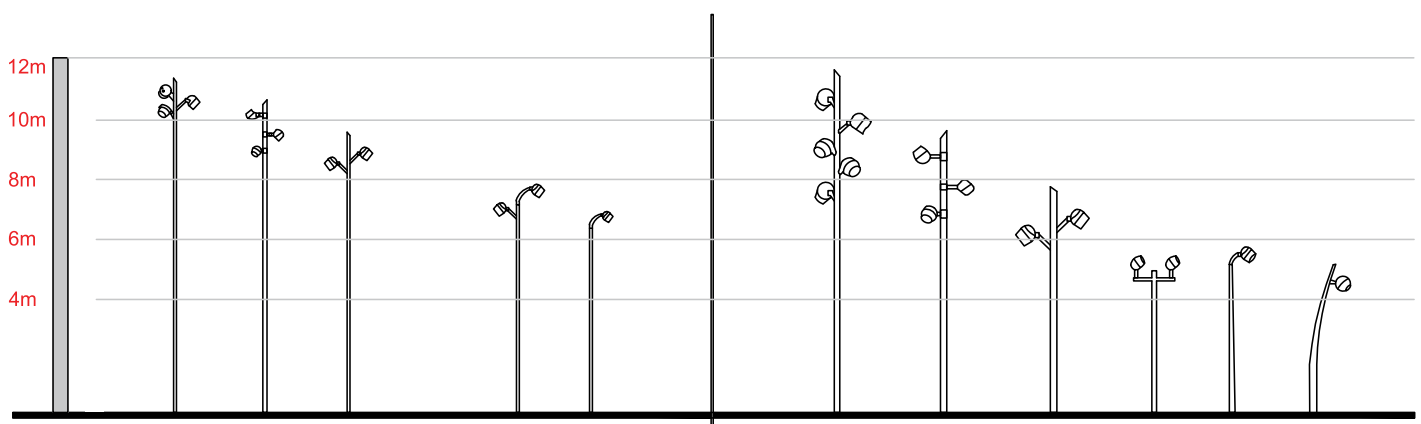

Code	Power	Lumen	CCT	CRI	Beam Angle
BULLET-S					
09W-12W	09W-12W	720lm-960lm	3000K-5500K	>80	7°/15°/25°/ 40°/60°
BULLET-M					
24W-40W	24W-40W	2000lm-3200lm	3000K-5500K	>80	7°/15°/25°/ 40°/60°
BULLET-L					
60W-100W	60W/75W/100W	4800lm/6000lm/8000lm	3000K-5500K	>80	7°/15°/25°/ 40°/60°

*Lumens calculated on 3000k



5°



7°



15°



25°



40°



60°



BULLET - R (5 Mtr)



BULLET - S (7 Mtr) at Shanghai, China




BULLET - B (4 Mtr) at Shanghai, China




BULLET (FOR TREE STRAP)





BULLET- S

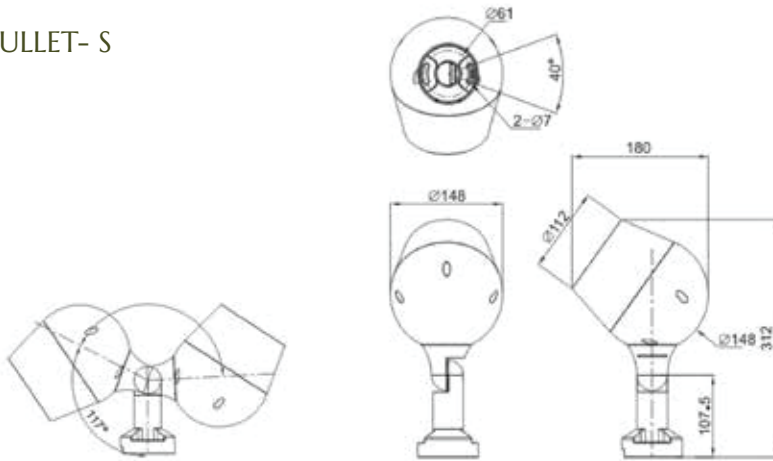


BULLET- M

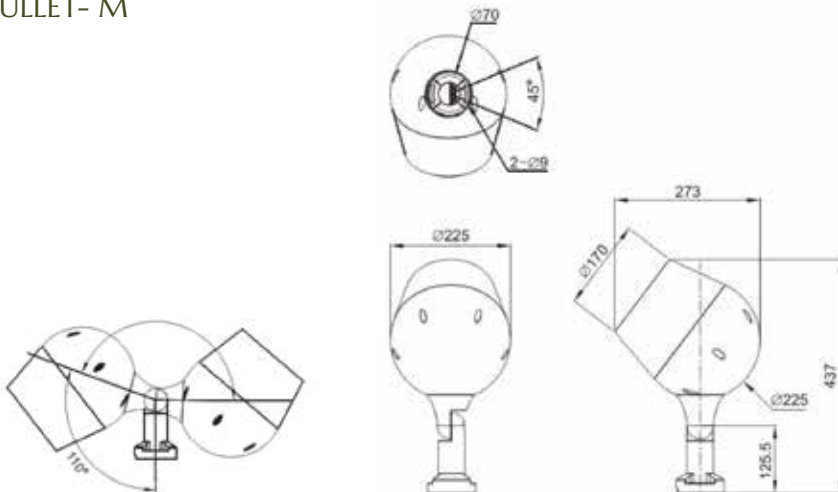

BULLET- L

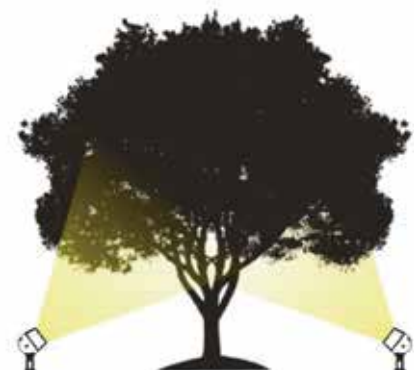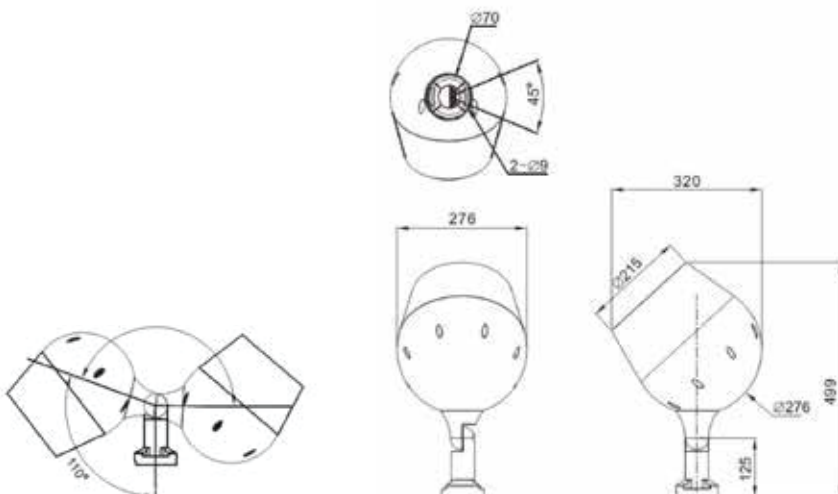

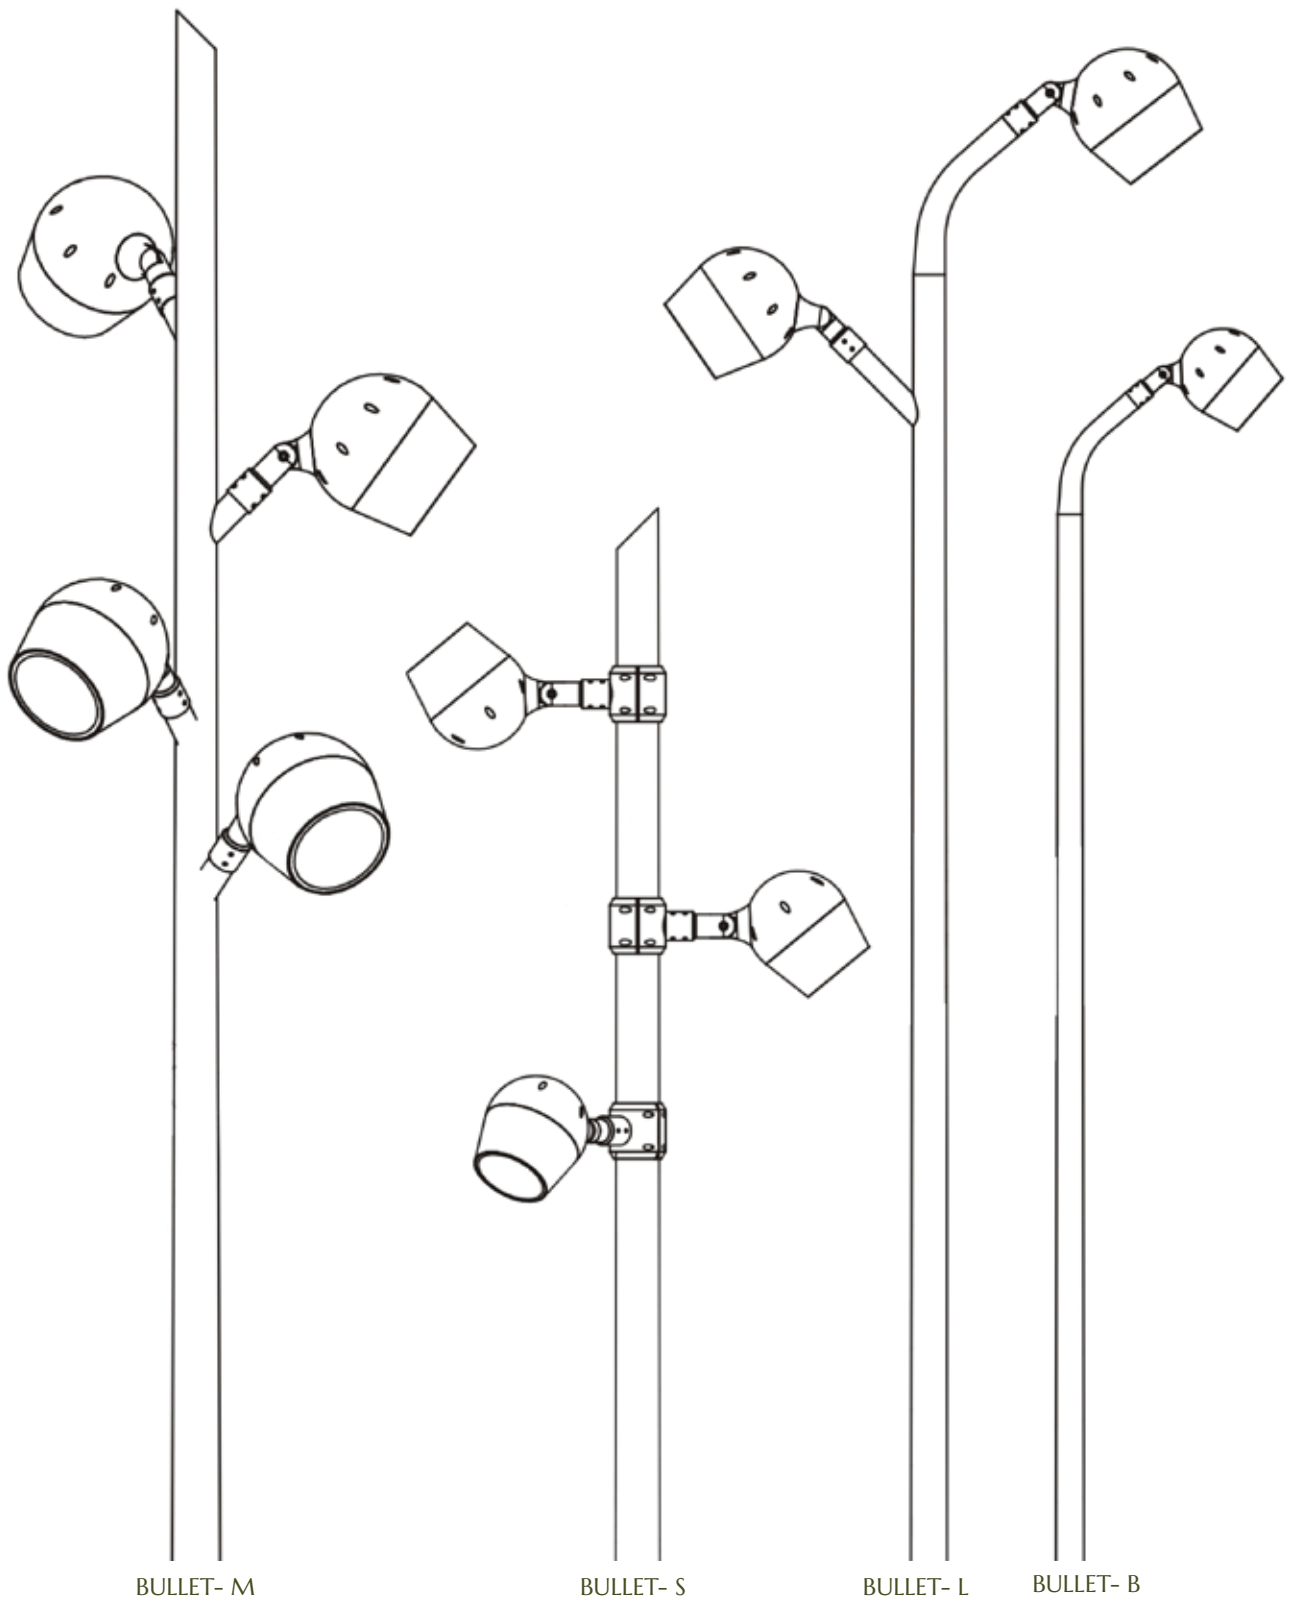

Height	
Pole M	4 mtr
Pole S	3 mtr
Pole L	6-8mtr
Pole B	1-2mtr

Urban light

IGLO SERIES

Special Mould
Generation 4



Features:

- Ultra compact LED floodlight dedicated to architectural illumination and light accentuation.
- IGLO SERIES is an impressive, highly efficient lighting concept for urban living environments.
- The versatility of this product family enables individualized design solutions to create functional and atmospheric lighting.
- The IGLO LED range of luminaires combines 4 models- pole mounted, bollard, wall mounted and spike light, available in different wattages with 5 sizes.



Specifications:

- Die- cast aluminium housing.
- Electrostatic powder painting- grey/black or any RAL color on request. (Customisation as per site request)
- Maintenance friendly.
- Also available with hood.



Shanghai, China



Shanghai, China

Code	Power	Lumen	CCT	CRI	Beam Angle
IGLO S					
10W-15W	10W-15W	110lm/W	3000K-5500K	>80	7°/15°/25°/ 40°/60°
IGLO M					
20W-30W	20W-30W	110lm/W	3000K-5500K	>80	7°/15°/25°/ 40°/60°
IGLO L					
40W-60W	40W-60W	110lm/W	3000K-5500K	>80	7°/15°/25°/ 40°/60°
IGLO XL					
80W-100W	80W-100W	110lm/W	3000K-5500K	>80	7°/15°/25°/ 40°/60°
IGLO XXL					
120W-150W	120W-150W	110lm/W	3000K-5500K	>80	7°/15°/25°/ 40°/60°

*Lumens calculated on 3000k




IGLO
TL-03 (4 Mtr)



IGLO
TL-03A (7 Mtr)

IGLO
TL-03A (5 Mtr)

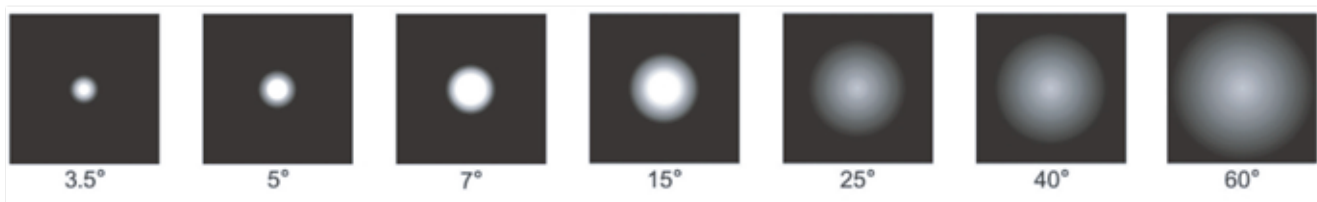


IGLO S




IGLO M





IGLO L

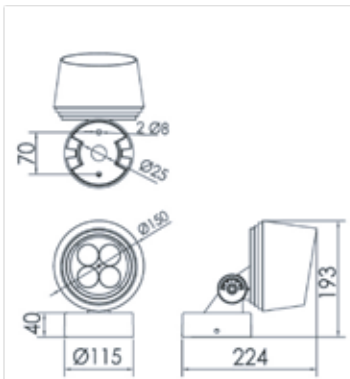


*Wall Mounted





*Spike/shrub light

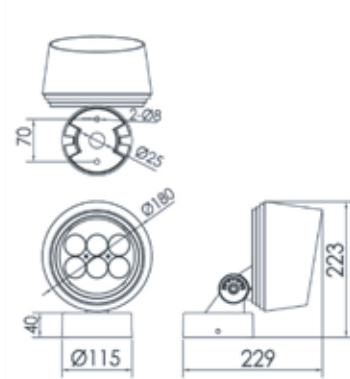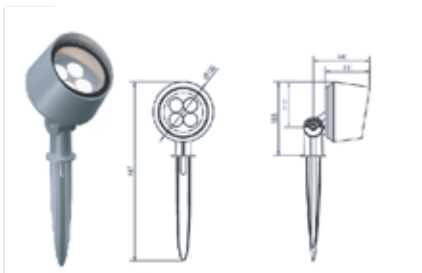


*Wall Mounted




*Spike/shrub light

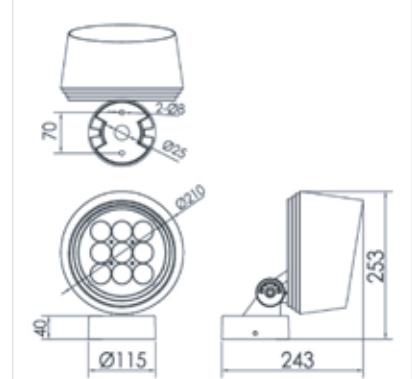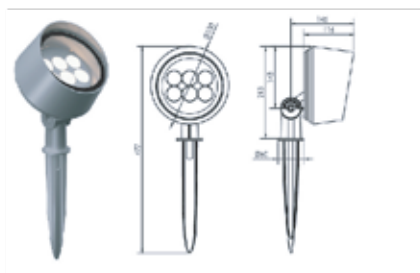

*Wall Mounted




*Spike/shrub light

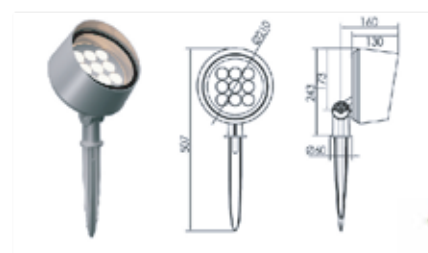


IGLO XL



IGLO XXL

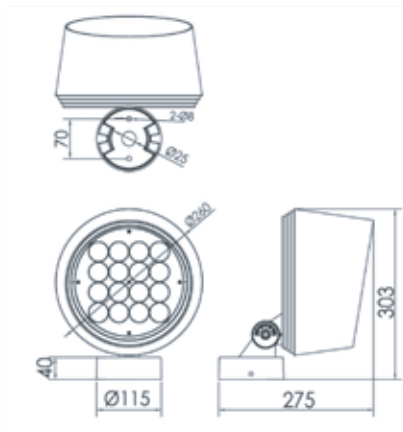

*Wall Mounted

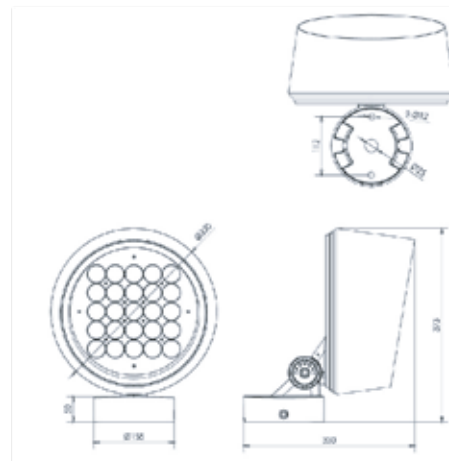

*Wall Mounted





Urban light

VICTORIA

Special Mould

Generation 4



Features:

- The VICTORIA lantern is offered as standard post top mounting but can be supplied to meet the specific or additional requirements of a particular project.
- Four-faced design propulses classical style into the 21st century.
- Decorative units from this range can be effectively used in many applications from residential streets to amenity areas.
- VICTORIA offers a complete solution to light urban spaces with superior efficiency and a striking design.
- Available in two sizes, designed for on-site replacement of the LED photometric engine.
- Wall and suspended mounted also available.



Specifications:

- High strength, anti corrosion, die-cast aluminium body.
- Vandal resistant single piece polycarbonate heat formed protector.
- Available with a range of high performance optics giving excellent photometric results.



VICTORIA at Fagu, Shimla






VICTORIA at DLF Golf and Country Club




VICTORIA at DLF OMR, Chennai

Code	Power	Lumen	CCT	CRI
VICTORIA				
40W-100W	40W/60W/100W	3600lm/5400lm/9000lm	3000K/4000K/5500K	>80

*Lumens calculated on 3000k

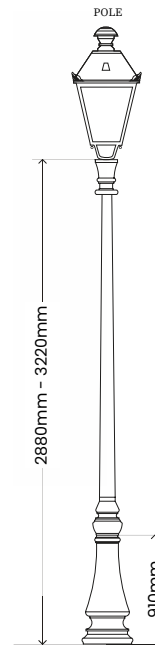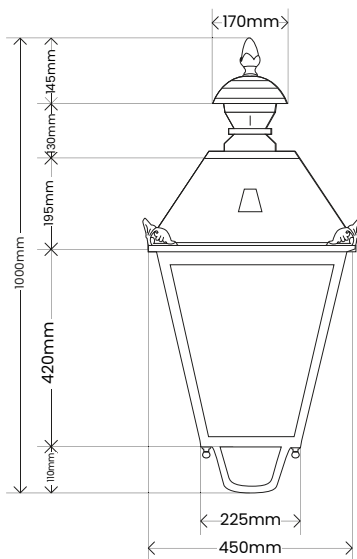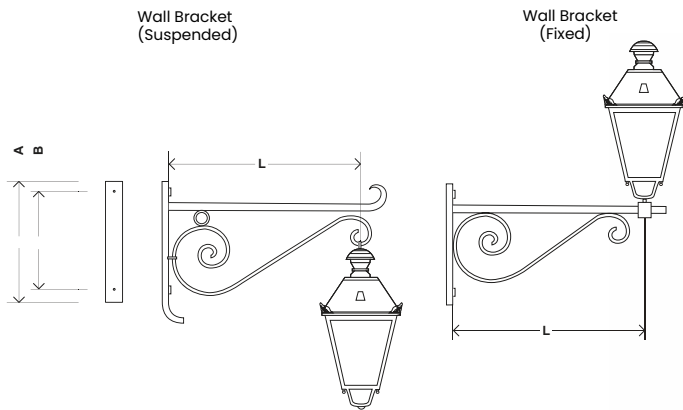

Mounting Base



Other mountain configuration on request



TL09C - 3.5 Mtr

Urban light

ROYAL

Special Mould

Generation 4



Features:

- The ROYAL lantern is offered as standard post top mounting but can be supplied to meet the specific or additional requirements of a particular project.
- Decorative units from this range can be effectively used in many applications from residential streets to amenity areas.
- ROYAL offers a complete solution to light urban spaces with superior efficiency and a striking design.
- Easy replacement of photometric engine and electronic assembly.
- Wall mounted is also available.



Specifications:

- High strength, anti-corrosion, die-cast aluminium body.
- Vandal resistant single piece polycarbonate heat formed protector.
- Available with a range of high performance optics giving excellent photometric results.




ROYAL suspended



Code	Power	Lumen	CCT	CRI
ROYAL POST-OP				
40W	40W	3600lm	5500K/4000K/3000K	>80
ROYAL SUSPENDED				
60W	60W	5400lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k

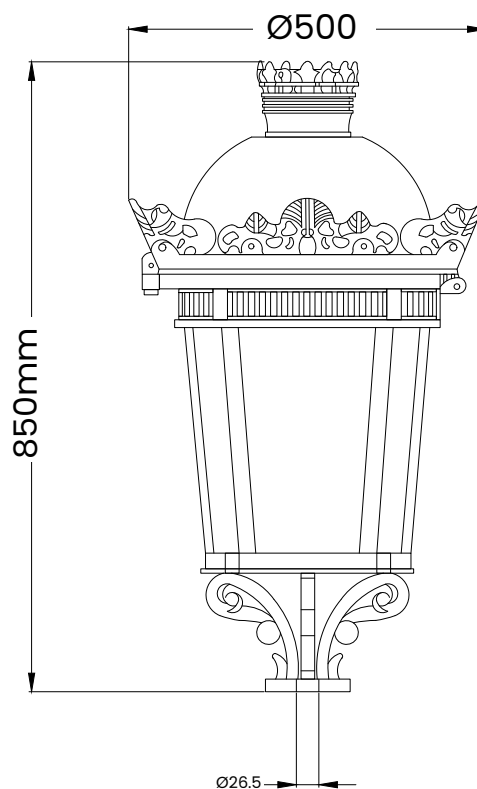

*Available in three sizes

ROYAL Post-op
FYZT-P-6004

Urban light

PATIO

Special Mould
Generation 4



Features:

- The PATIO lantern is offered as standard post top mounting but can be supplied to meet the specific or additional requirements of a particular project.
- Traditional look combined with cutting edge technology.
- Decorative units from this range can be effectively used in many applications from residential streets to amenity areas.
- PATIO offers a complete solution to light urban spaces with superior efficiency and a striking design.
- Available in two sizes, with a different range LED photometric engines.
- Wall and suspended mounted also available.



Specifications:

- High strength, anti corrosion, die-cast aluminium body
- Vandal resistant single piece polycarbonate heat formed protector
- Available with a range of high performance optics giving excellent photometric results.



LED MODULE



LED MODULE

Code	Power	Lumen	CCT	CRI
PATIO				
40W-100W	40W/60W/80W	3800lm/5400lm/9000lm	3000K/4000K/5500K	>80




*Lumens calculated on 3000k



PATIO



PATIO-V

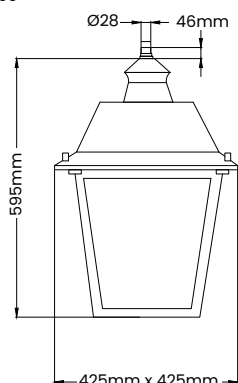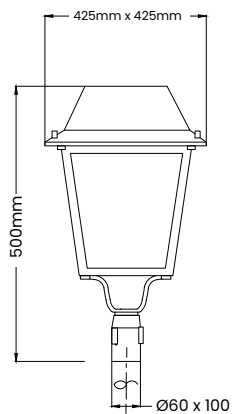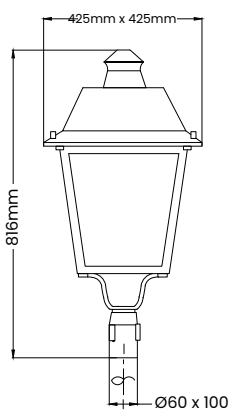

PATIO at DLF Capital Greens, Delhi



Urban light

HAMMER

Special Mould

Generation 4



Features:

- The HAMMER luminaire combines efficiency, aesthetics and visual comfort.
- With timeliness elegance and its high performance photometry, this luminaire is a distinctive light tool.
- The compactness is coupled with careful design that harmoniously integrates both functionality and finish.
- applications from residential streets to amenity areas.
- HAMMER offers a complete solution to light urban spaces with superior efficiency and a striking design.



Specifications:

- High strength, anti corrosion, die-cast aluminium body.
- Vandal resistant single piece polycarbonate heat formed protector.
- Available with a range of high performance optics giving excellent photometric results.




Code	Power	Lumen	CCT	CRI
HAMMER				
40W-60W	40W/50W/60W	360lm/4500lm/5400lm	300K/4000K/5500K	>80

*Lumens calculated on 3000k



DLF Sky Court

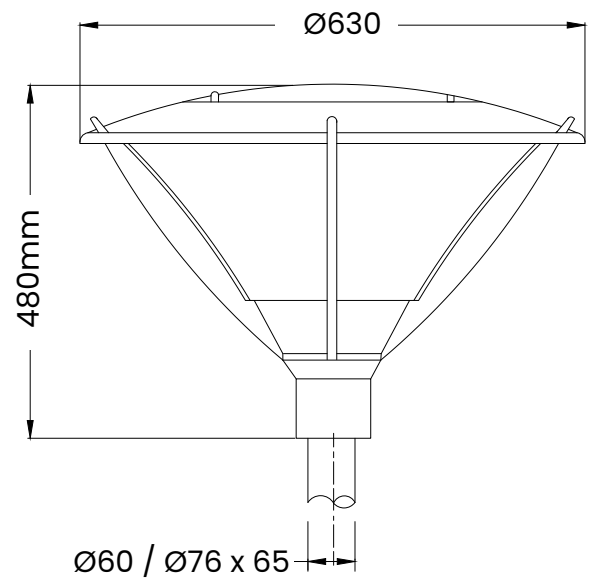

DLF Sky Court



DLF Sky Court



DLF Sky Court



DLF Sky Court

Urban light

HAT

Special Mould

Generation 4



Features:

- A classic of the victorian era, the HAT LED is notable for its versatility.
- This luminaire is available in two sizes, for aesthetic coherence.
- This luminaire's refined design blends perfectly into any urban architectural environment.
- A versatile best seller converted to LED technology.




Specifications:

- RTP (Reinforced Technical Polymer) Fibre for longer life, also available in aluminium.
- Diffuser in polycarbonate.
- The remarkable efficiency and photometric diversity offered by the HAT range allows for installations at heights of between 3 to 12 mtr.



Code	Power	Lumen	CCT	CRI
HAT				
70W-150W	50W-100W	5000lm-15000lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k

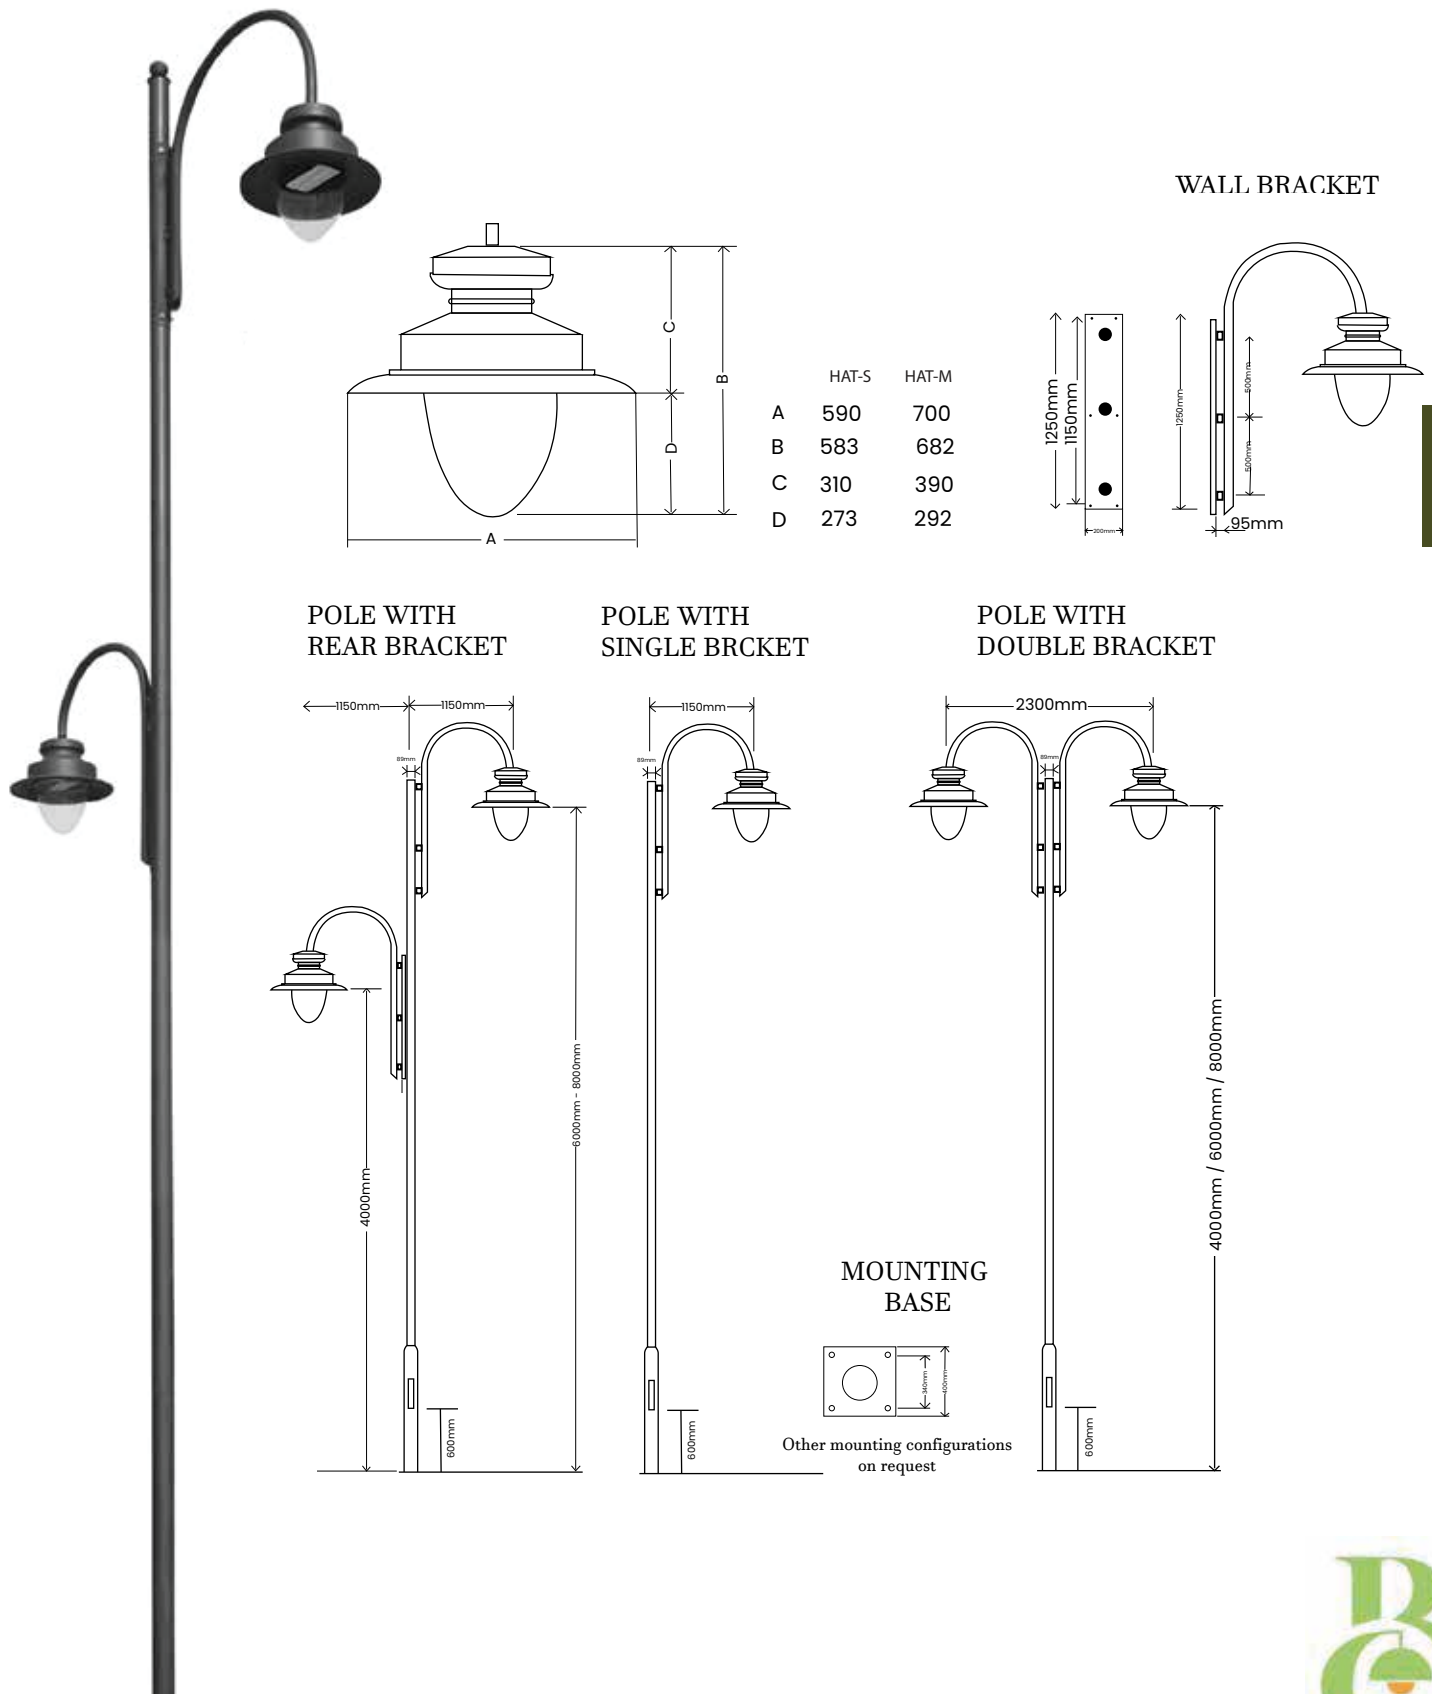



Dlf Crset, Gurgaon



Dlf Crest, Gurgaon



Dlf Garden City



Dlf Skycourt, Gurgaon



Amusement Park, Rohini



Amusement Park, Rohini



Dlf Garden City, Manesar



Dlf Garden City, Manesar

Urban light

VERTU

Special Mould

Generation 4



Features:

- Modern, sleek design using state of the art technology with high efficiency and energy saving design.
- VERTU offers a complete solution to light urban spaces with superior efficiency and a striking design.
- Combined asymmetrical optical system for a wide variety of landscaping requirements.
- Decorative sleek arm gives aesthetic to the environment.



Specifications:


- High strength, anti corrosion, die-cast aluminium body.
- Vandal resistant single piece polycarbonate heat formed protector.
- Available with a range of high performance optics giving excellent photometric results.



Shanghai, China

Code	Power	Lumen	CCT	CRI
VERTU				
50W-80W	50W-80W	4500lm/7200lm	300K/4000K/5500K	>80

*Lumens calculated on 3000k

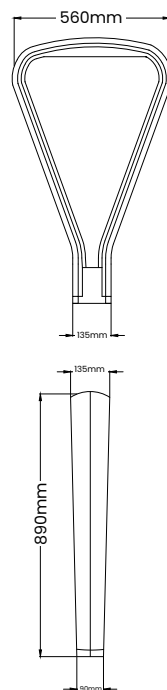

Urban light

CLIMA TORCH




Features:

- The CT LED range of luminaires combines four models- CLIMA post-top, CLIMA bollard, CLIMA wall bracket and TORCH.
- With its novel design, the CLIMA post top is made out of aluminium as well the bollard and wall bracket is made of stainless steel to satisfy the multiple needs of the city.
- Whether these are for lighting, providing a lively atmosphere or for signs for urban centre, the CLIMA range needs these different application requirements while displaying the aesthetics affinity of the product.
- The TORCH lighting column is made from galvanised steel, available from 2.5mtr-5mtr.
- These luminous columns serve both as public lighting as well as urban city paths.
- Wall units and luminaire's are the complementary tools of this range and make it possible to bring together a number of urban lighting functionalities with aesthetic.



Specifications:

- The TORCH luminous lighting column comprises of a cylinder and a light conductor diffuser made of polycarbonate.
- Available in any RAL color as per requirement(customisation as per site requirement).

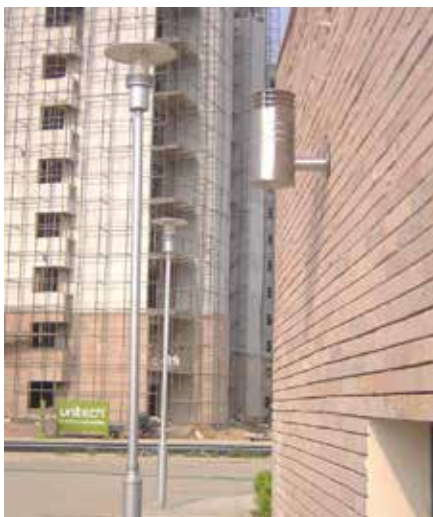


Shanghai, China




Shanghai, China

Code	Power	Lumen	CCT	CRI
CILMA				
30W-60W	30W-60W	2400lm-5400lm	5500K/4000K/3000K	>80
TORCH				
30W-50W	30W-50W	2400lm-4500lm	5500K/4000K/3000K	>80


*Lumens calculated on 3000k

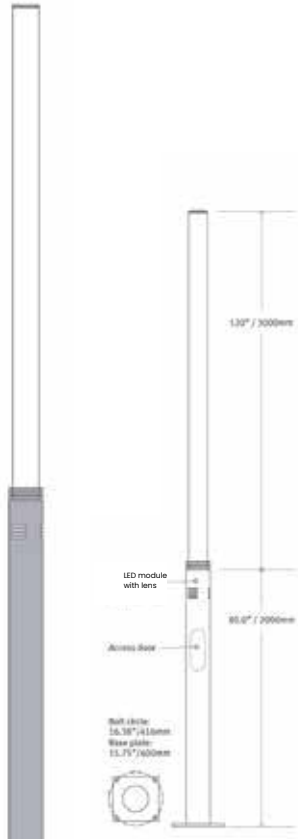


TORCH
FY-10

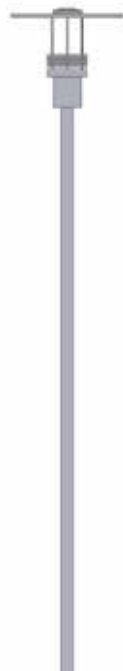

CLIMA
FYZT-8021

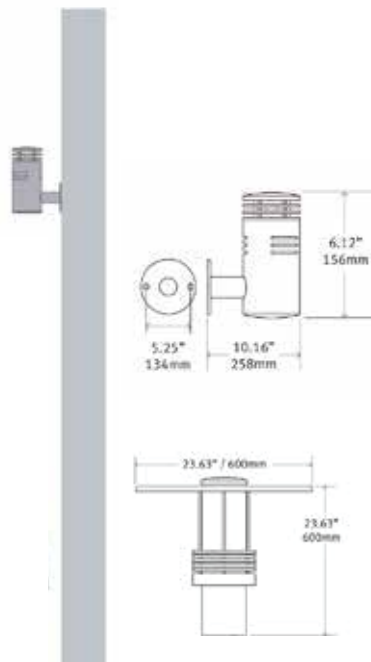

CLIMA WALL
BRACKET
FYZT-8021-WB

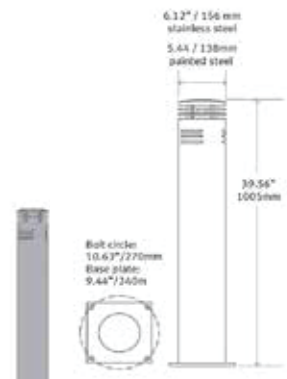

CLIMA BOLLARD
FYZT-8021-B







Urban light

ANTLER

Special Mould

Generation 4



Features:

- The ANTLER series offers a complete solution to light urban spaces with superior efficiency and a striking design.
- It is particularly designed for stylish, modern lighting.
- This concept guarantees glare-free ambient lighting.
- Combined optic lens for a wide variety of landscaping requirements.



Specifications:



- High strength, dust proof, water proof, anti-corrosion, die cast aluminium body.
- High lumens LED chip, high efficiency driver power supply.
- Available in any RAL color on request. (Customization as per site request)



Shanghai, China

Code	Power	Lumen	CCT
ANTLER			
30W-100W	30W/60W/80/100W	2700lm/5400lm/7200lm/9000lm	5500K/4000K/3000K

*Lumens calculated on 3000k

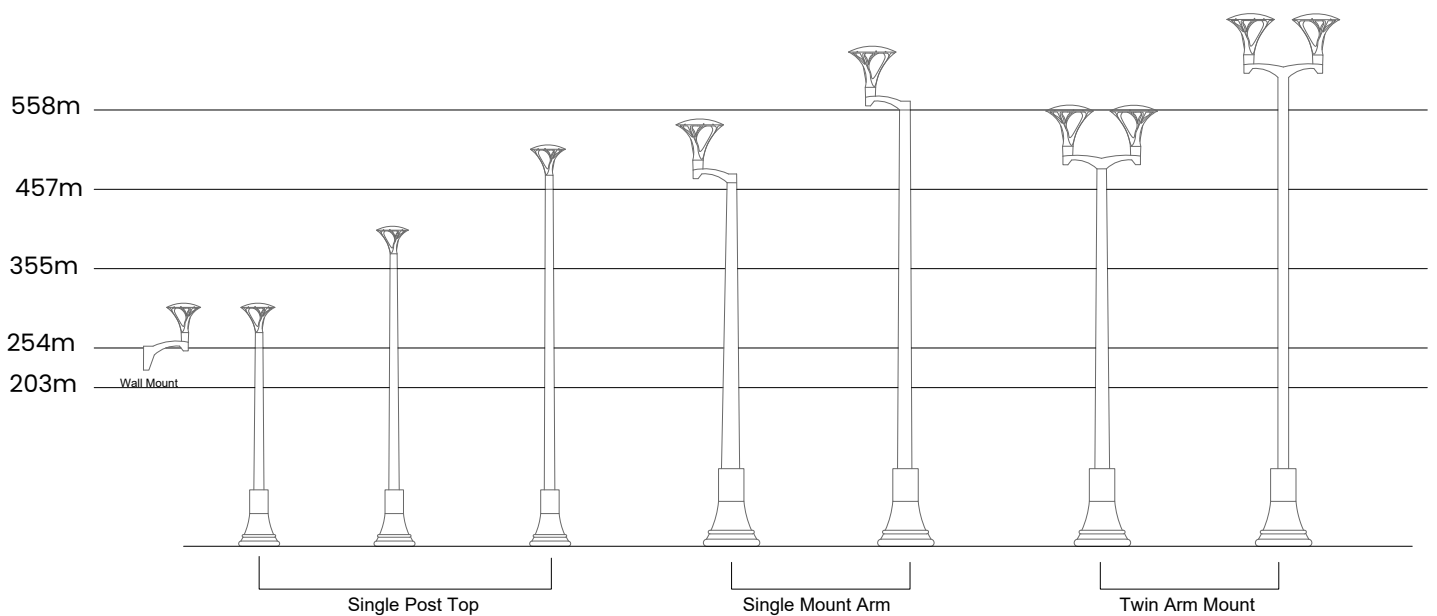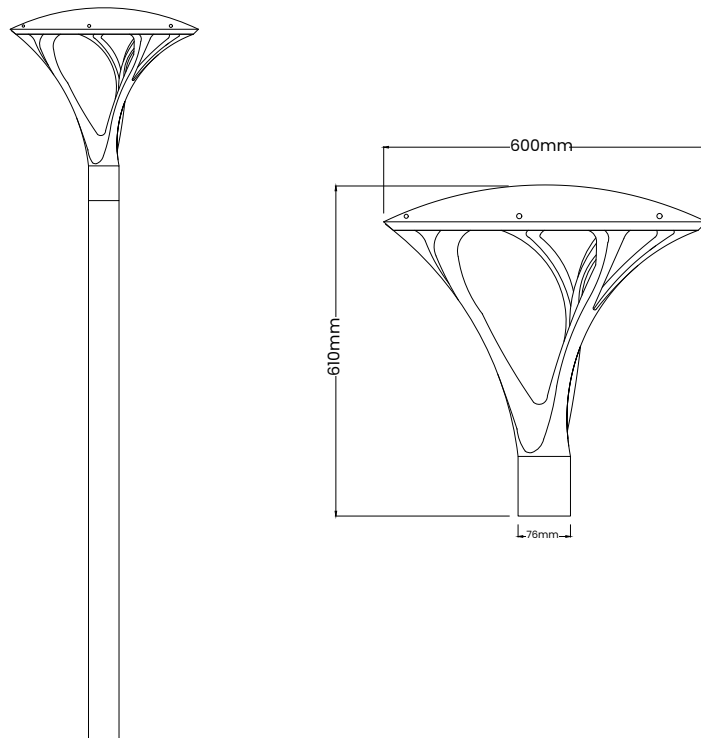



Shanghai, China



Shanghai, China



Shanghai, China



Shanghai, China

Urban light

DRIFT

Special Mould

Generation 4



Features:

- The clear luminaire adapts to various urban landscapes such as parks, squares, gardens and residential areas.
 - It requires limited maintenance.
 - The classical shape is now refreshed to provide an aesthetic continuity.
 - This concept guarantees a glare-free lighting ambiance.
- This luminaire's refined design blends perfectly into any urban architectural environment.



Specifications:


- High strength, anti corrosion, die cast aluminium body.
- Available with a range of high performance optics giving excellent photometric results.
- Suggested mounting height 3-5mtr.
- Diffuser in polycarbonate
- Available in any RAL color on request (Customization as per site requirement)



Shanghai, China

Code	Power	Lumen	CCT	CRI
DRIFT				
30W-90W	30W/50W/90W	2700lm/4500lm/8100lm	4000K/5000K/6000K	>80

*Lumens calculated on 3000k

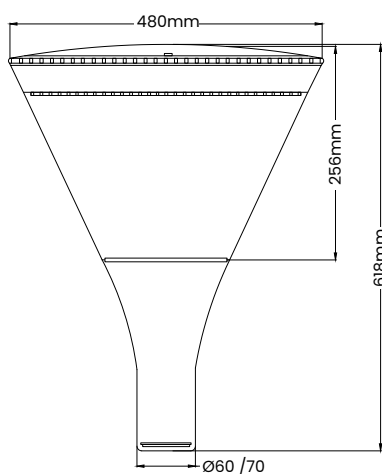

Shanghai, China



Shanghai, China



Code	Power	Lumen	CCT	CRI
CRIS				
30W-90W	30W/50W/90W	2700lm/4500lm/8100lm	4000K/5000K/6000K	>80

*Lumens calculated on 3000k




Shanghai, China




Shanghai, China

CRIS D

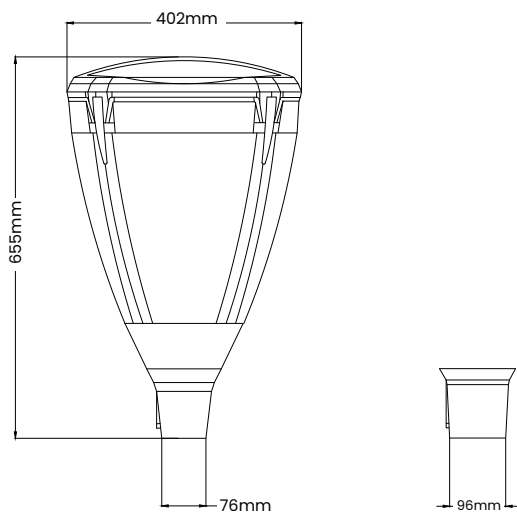

CRIS S

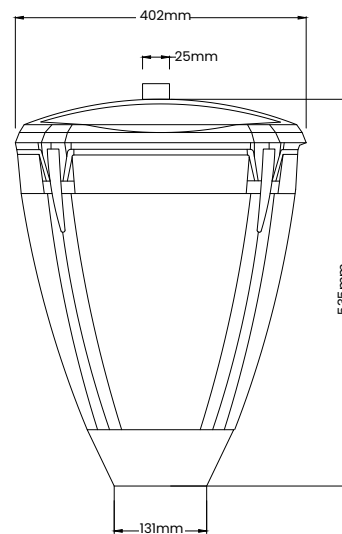

Urban light

CRIS

Special Mould
Generation 4



Features:

- The clear luminaire adapts to various urban landscapes.
- Elegant and comfortable solution for creating a warm ambience.
- Cris is available in wide range of versions to suit the environment.
- Cris offers photometric efficiency with visual comfort and creation of ambience due to the high power LED's.



Specifications:

- High strength, anti corrosion, die cast aluminium body.
- Available with a range of high performance optics giving excellent photometric results.
- Suggested mounting feature 3-5mtr.
- Available in any RAL color on request(Customization as per site requirement)



Shanghai, China

Urban light

HOOD

Special Mould
Generation 4




Features:

- HOOD offers photometric efficiency with visual comfort and creation of ambiance due to the use of high power LEDs.
- High pressure die-casting aluminium housing.
- External electro-static powder spraying.
- Heat proof silicone rubber gasket.



Specifications:

- HOOD has 5mm thickness.
- Available in any RAL color on request(customisation available as per site requirement)
- High strength, anti corrosion, die-cast aluminium body.

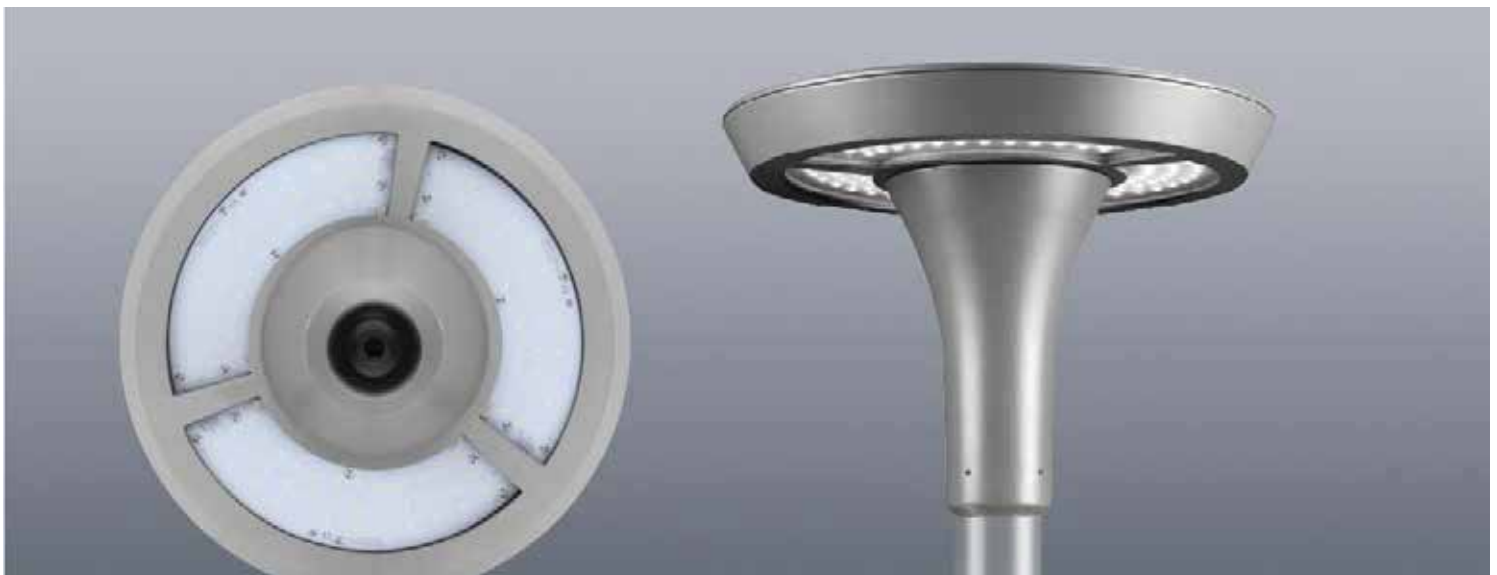

Shanghai, China

Code	Power	Lumen	CCT	CRI
HOOD				
30W-60W	30W/40W/50W/60W	2100lm/2800lm/3500lm/4200lm	2700K-6500K	>80



*Lumens calculated on 3000k



Shanghai, China



Shanghai, China

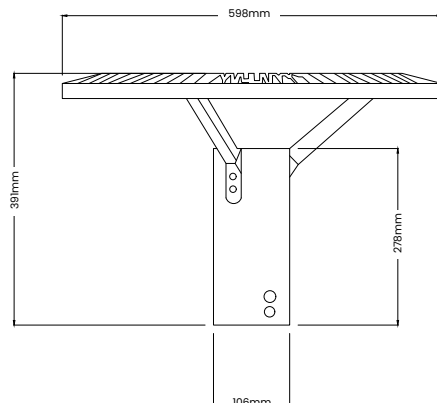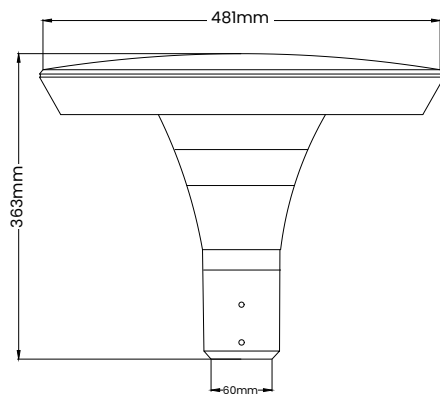

Urban light

SCOTT

Special Mould

Generation 4



Features:

- Modern perfect design, high performance, and energy saving.
 - The SCOTT luminaire combines aesthetics and visual comfort.
 - SCOTT offers a complete solution to light urban spaces with superior efficiency and a striking design.
 - This concept guarantees glare-free ambient lighting.
- The SCOTT range of luminaires combines 2 models: SCOTT post top and SCOTT bollard.



Specifications:



- High strength, anti-corrosion, die cast aluminium body.
- High lumens LED chip, high efficiency driver power supply.
- Available in any RAL color on request. (Customization as per site request)



Shanghai, China

Code	Power	Lumen	CCT	CRI
SCOTT				
30W-60W	30W/40W/60W	2700lm/3600lm/5400lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k

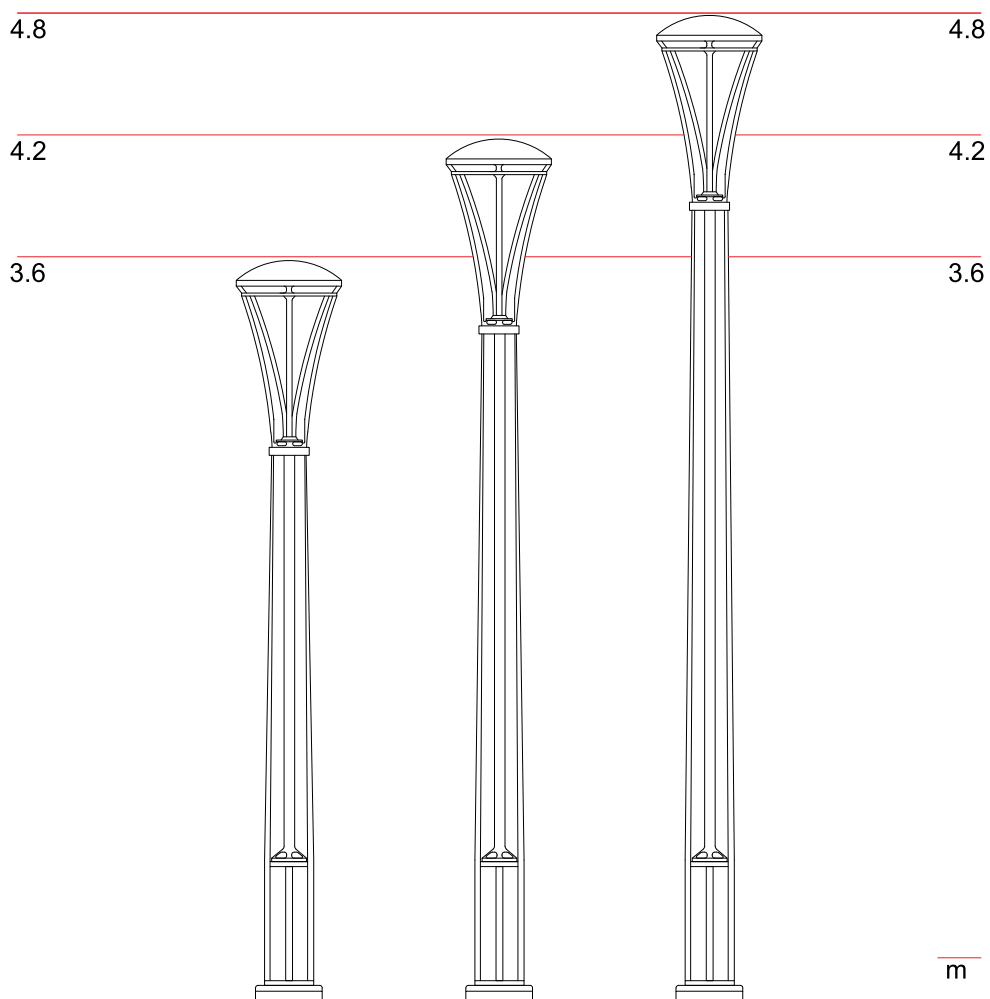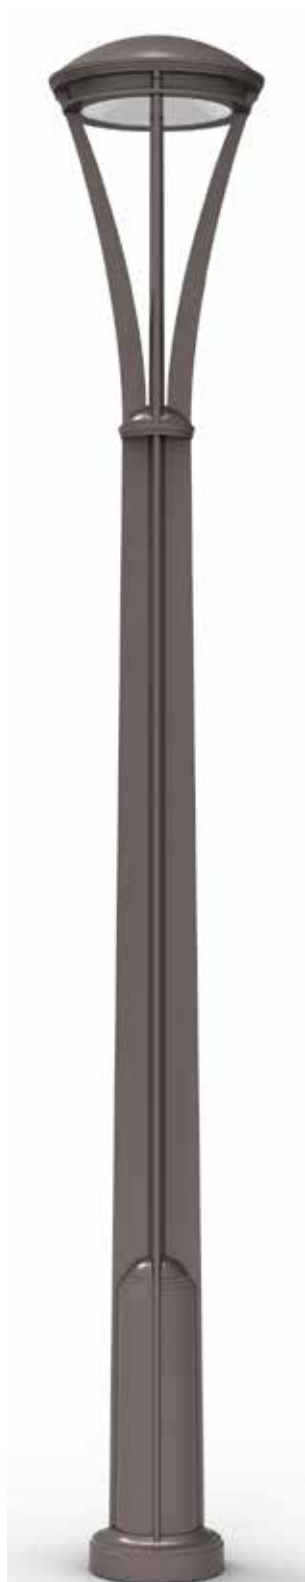

Urban light

VOLT

Special Mould

Generation 4



Features:

- The VOLT range of luminaire combines 2 models: VOLT post top and VOLT bollard.
- The VOLT offers a complete solution to light urban spaces with superior efficiency and a striking design.
- It is particularly designed for stylish, modern lighting.
- This concept guarantees glare-free ambience lighting. Combined optic lens for a wide variety of landscaping requirements.




Specifications:

- High strength, anti-corrosion, die cast aluminium body.
- High lumens LED chip, high efficiency driver power supply.
- Available in any RAL color on request. (Customization as per site request)



Code	Power	Lumen	CCT	CRI
VOLT				
30W-60W	30W/40W/60W	2700lm/3600lm/5400lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k

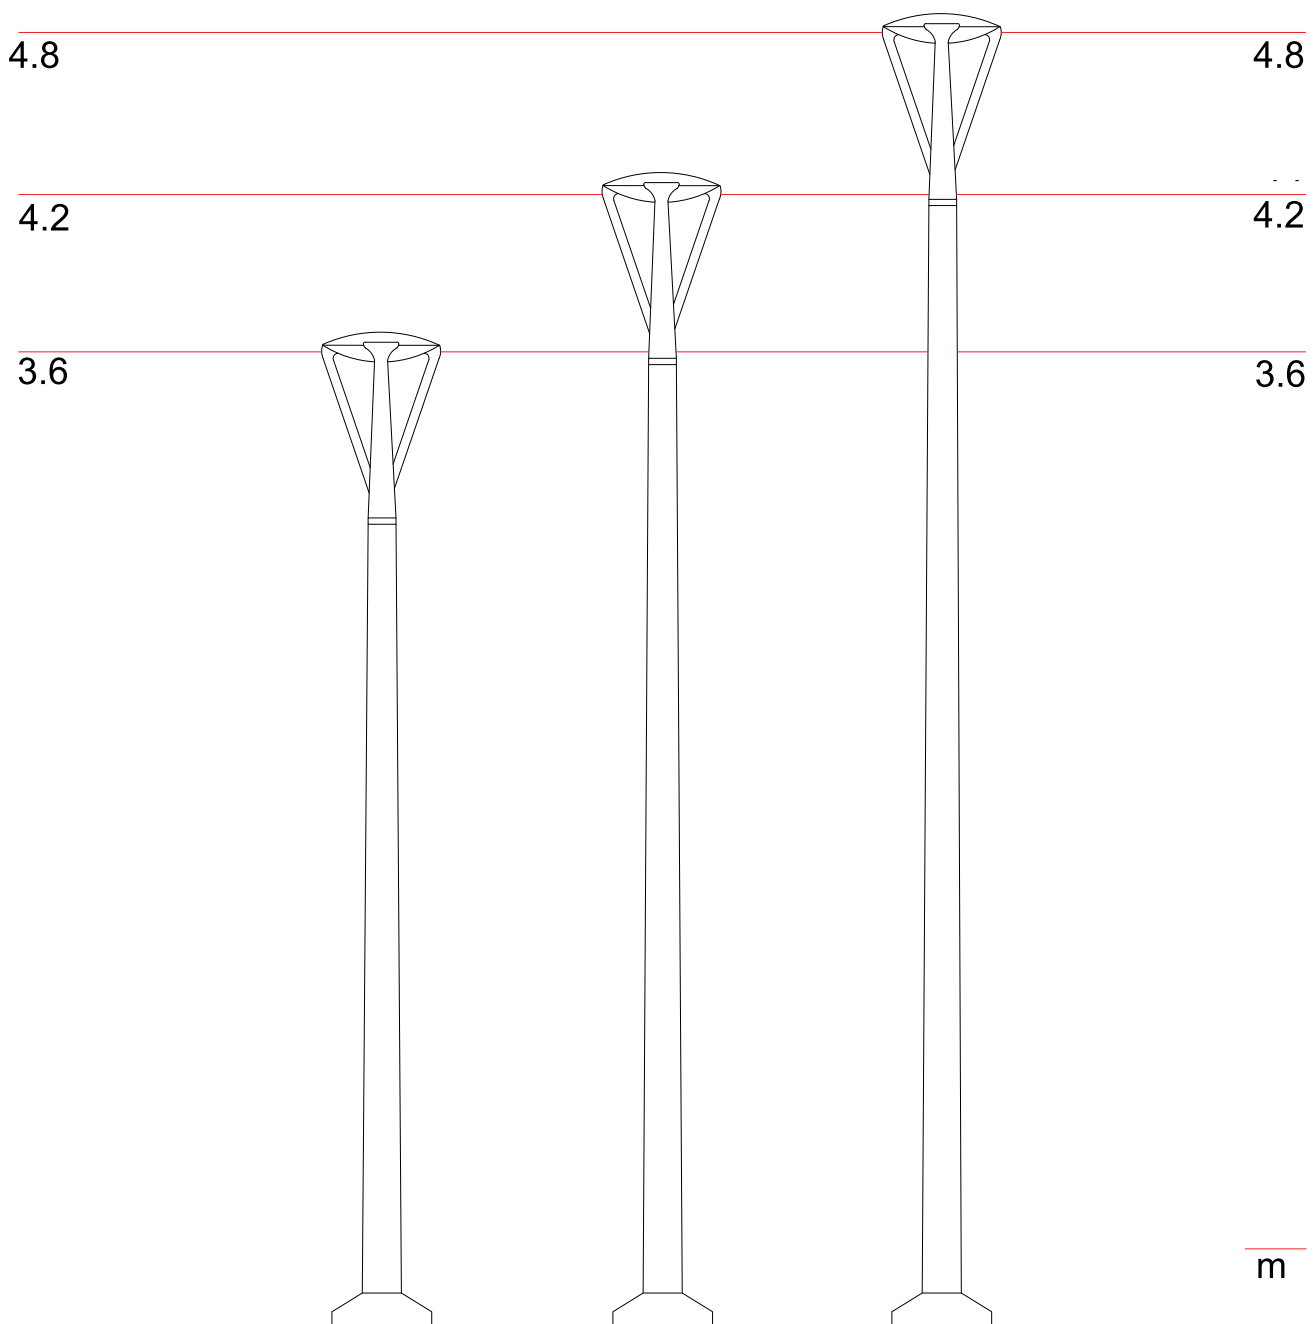

Urban light

CUADRO COLUMN

Special Mould

Generation 4



Features:

- CUADRO COLUMN is a contemporary, elegant luminaire particularly suited to urban landscapes.
- It is specially designed for parks, squares and pedestrian areas.
- High efficient integrated heat radiation design.
- The CUADRO COLUMN range of luminaire combines 3 models: CUADRO lighting column, CUADRO wall bracket and CUADRO bollard.
- CUADRO COLUMN can be installed on single, double or wall brackets.



Specifications:

- High strength galvanized steel and also available in aluminium section.
- Available with multiple range of high performance optic giving excellent photometric results.
- Available in RAL color on request. (Customisation as per site request)
- Available from 1 mtr – 8mtr height.



KARMA LAKE (CLUB) MANESAR



KARMA LAKE (CLUB) MANESAR

Code	Power	Lumen	CCT	CRI
CUADRO COLUMN				
40W-80W	40W/60W/80W	3600lm/5400lm/7200lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k



M3M GOLF ESTATE



M3M GOLF ESTATE



DLF CREST, GURGAON



M3M GOLF ESTATE



M3M GOLF ESTATE



KARMA LAKE (CLUB) MANESAR




Urban light


A




B

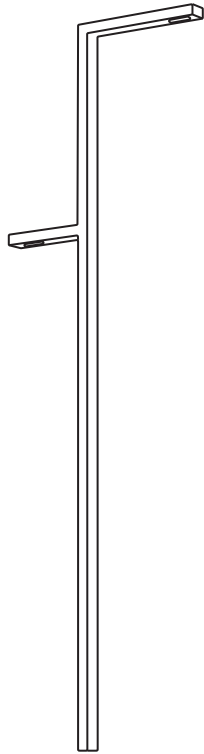


C

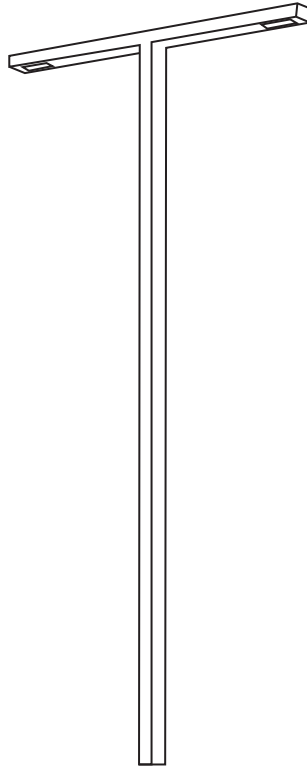


D

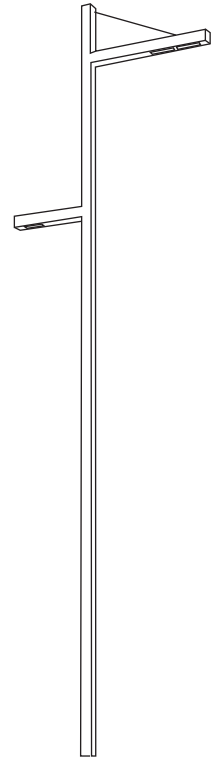



E

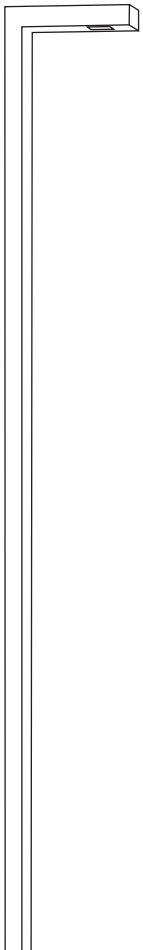

F

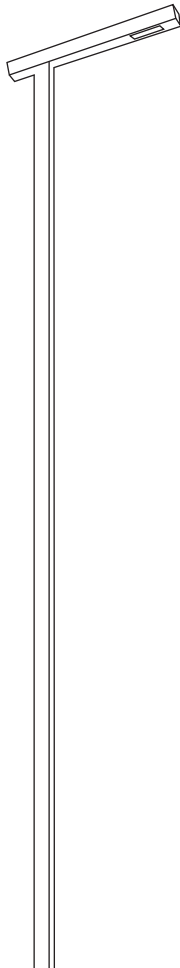

G

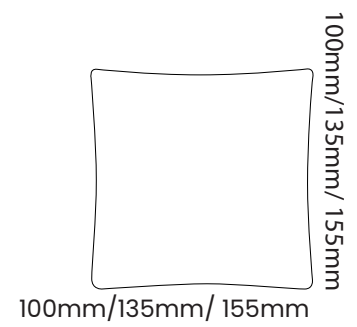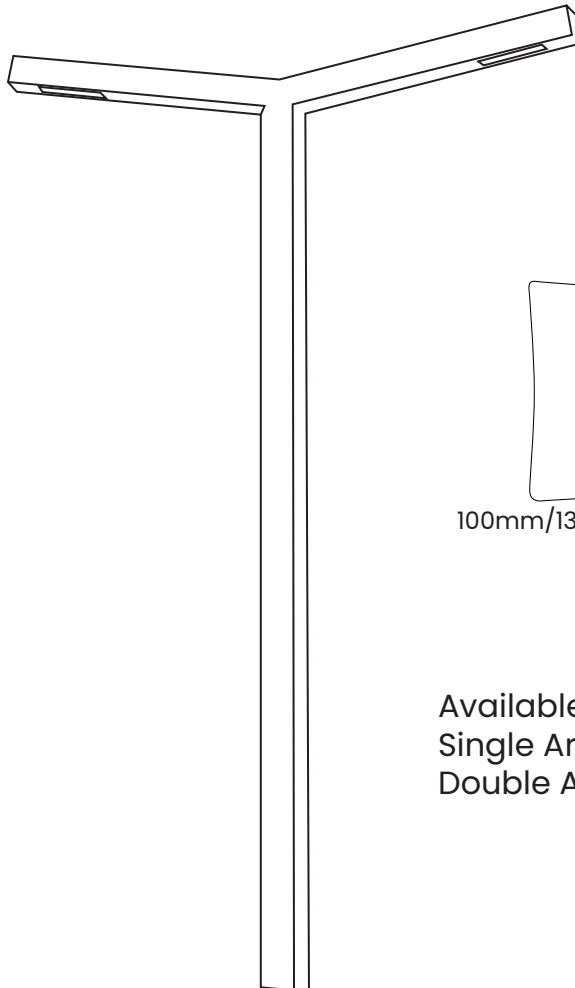

Available from 1.5 mtr - 8mtr.
Single Arm: 500m / 1000m
Double Arm: 2100mm








Urban light



Urban light

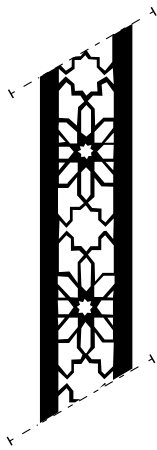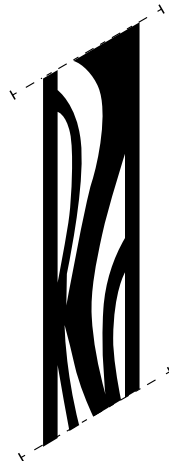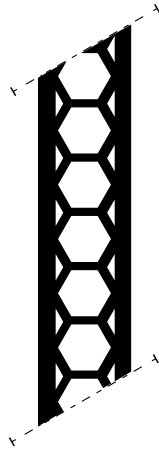



Bollards



Features :

- The BOLLARD with different heights is the main tool for the beautification of the landscape element.
- Lumens package scalable upto 2100 lm.
- The BOLLARD family with aesthetic designs is available in numerous sizes, shapes and heights which is fitted with LEDs and integrated suitable driver.
- A Sleek BOLLARD with columns blend perfectly into the heart of urban centres regardless of their architectural style.
- It is principally designed for lighting pedestrian/pathway areas.




Specifications :

- Aluminium/galvanised/stainless steel finished in electrostatic powder painting
- Available in any RAL color(customisation as per site requirement)
- Maintenance friendly.





TWISTER

* Also available in wall bracket, ref pg no.

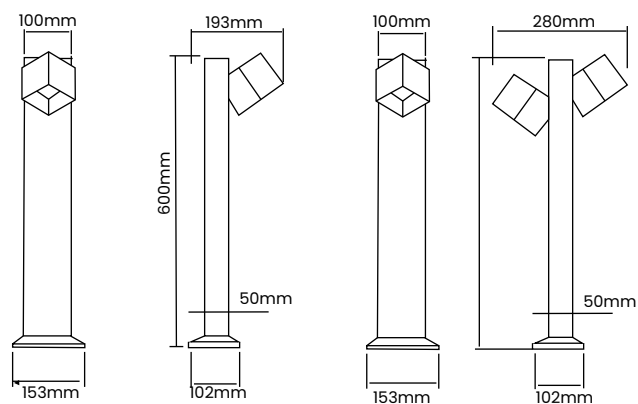

MIRAGE

MIRAGE MINI

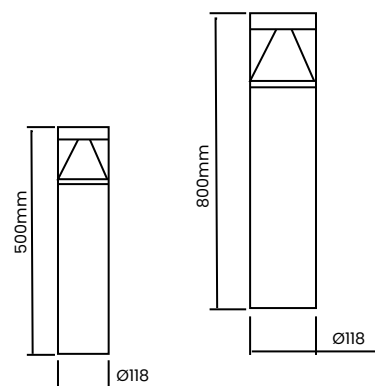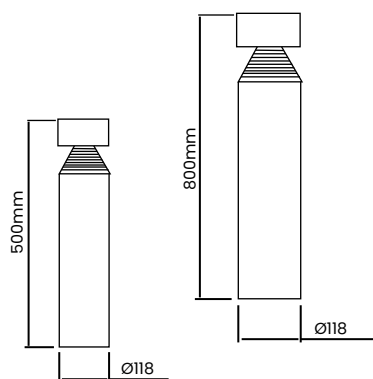


Code	Power	Lumen	CCT	CRI	Housing
TWISTER	06W-12W	480lm-720lm	3000K-5000K	>80	Aluminium
MIRAGE	10W-25W	800lm-2000lm	3000K-5500K	>80	Aluminium


*Lumens calculated on 3000k



MIRAGE I

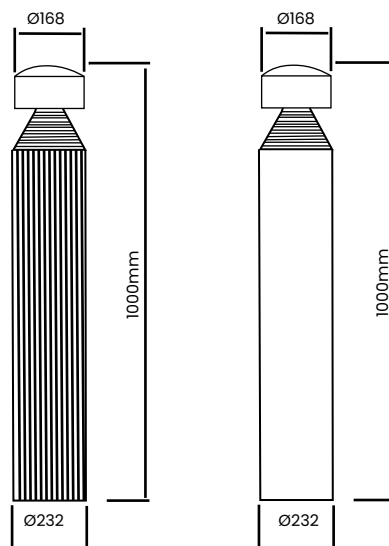

MYTHOS

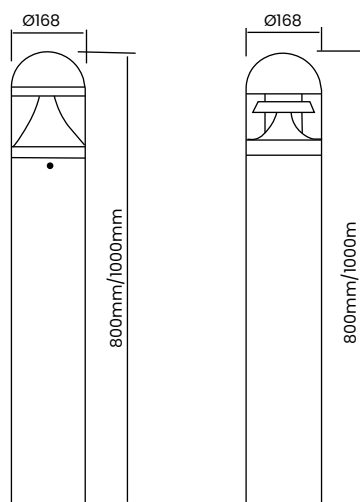


Code	Power	Lumen	CCT	CRI	Housing
MIRAGE I	25W	2000lm	3000K-5000K	>80	Aluminium
MYTHOS	21W-25W	1680m-2000lm	3000K-5500K	>80	Aluminium


*Lumens calculated on 3000k



SOPHIA

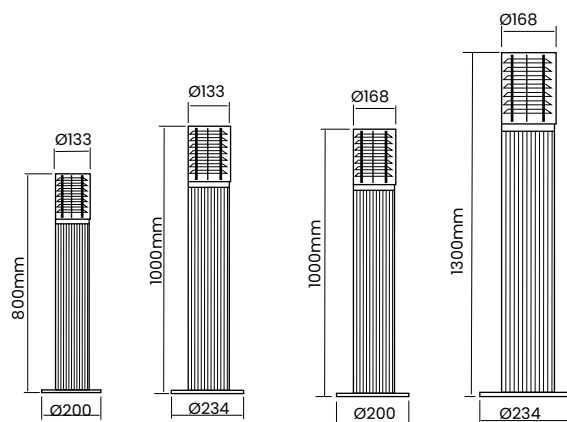

WINDOW

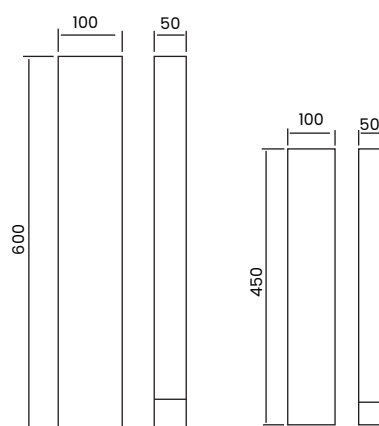


Code	Power	Lumen	CCT	CRI	Housing
SOPHIA	15W-21W	1200lm-1680lm	3000K-5000K	>80	Aluminium
WINDOW	15W-24W	1200m-1840lm	3000K-5500K	>80	Aluminium


*Lumens calculated on 3000k



COVIL

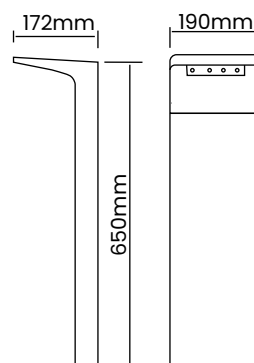

TILT

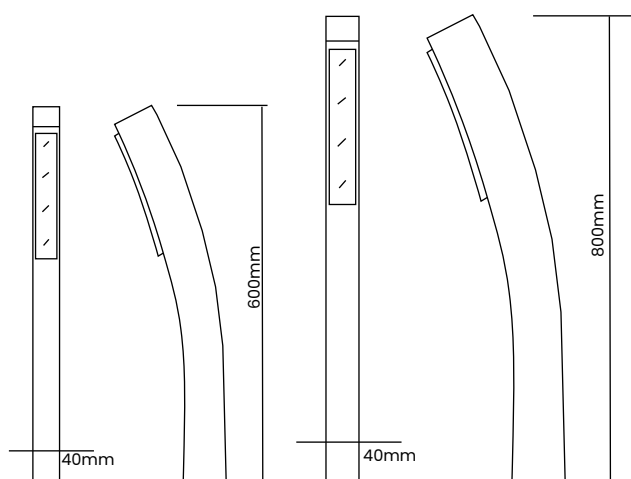

Code	Power	Lumen	CCT	CRI	Housing
COVIL	6W-12W	480-720lm	3000K-5000K	>80	Aluminium
TILT	8W	640lm	3000K-5500K	>80	Aluminium

*Lumens calculated on 3000k



CYNDRO



FRAME




*Also available in Wall Bracket,
ref pg no.

Code	Power	Lumen	CCT	CRI	Housing
CYNDRO	9W	810lm	3000K-5000K	>80	Aluminium
FRAME	9W	810lm	3000K-5500K	>80	Aluminium

*Lumens calculated on 3000k

CANDLE

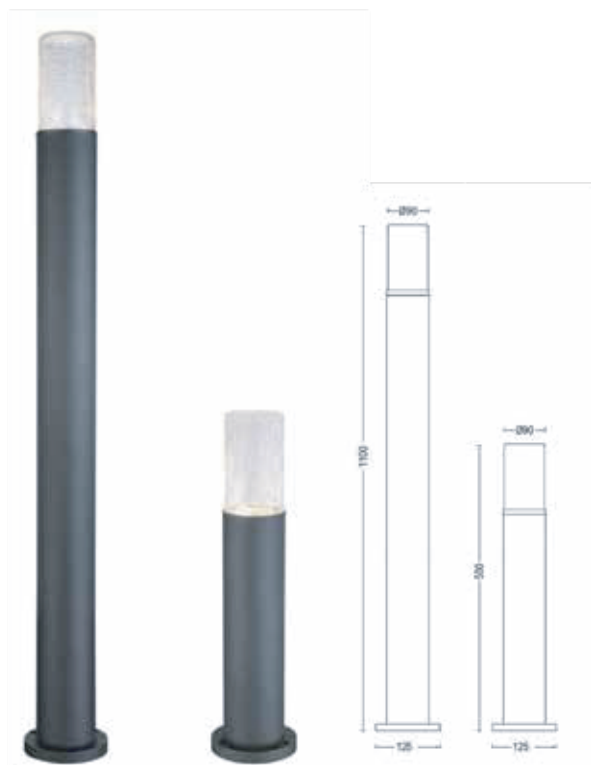

RING BOLLARD



Code	Power	Lumen	CCT	CRI	Housing
CANDLE	6W	810lm	3000K-5000K	>80	Aluminium
RING	9W	480lm	3000K-5500K	>80	Aluminium


*Lumens calculated on 3000k



AROMA



MOON

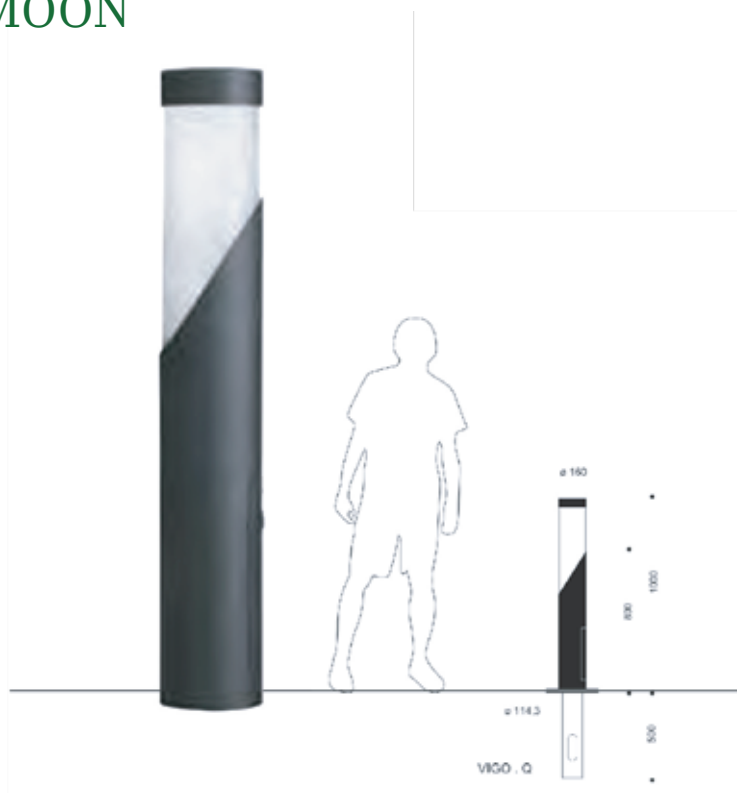


Code	Power	Lumen	CCT	CRI	Housing
AROMA	7W	630lm	3000K-5000K	>80	Aluminium
MOON	7W	630lm	3000K-5500K	>80	Aluminium


*Lumens calculated on 3000k





CUBIOD I

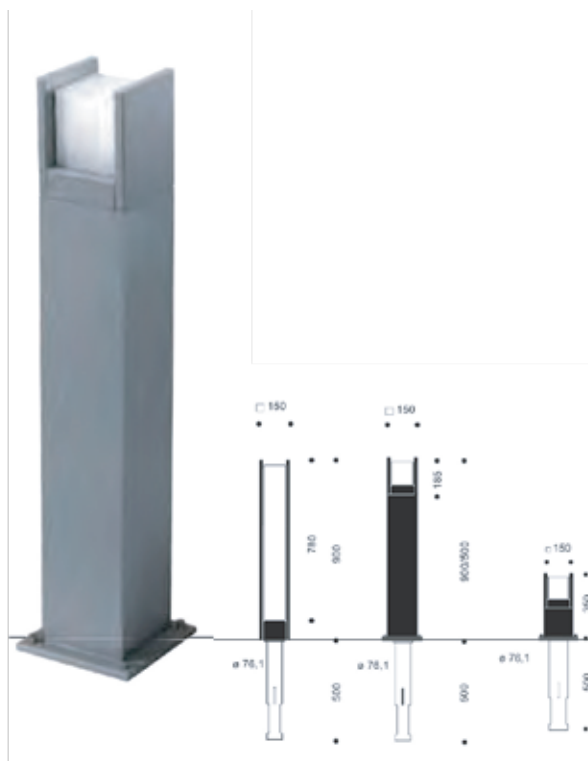

CUBIOD II

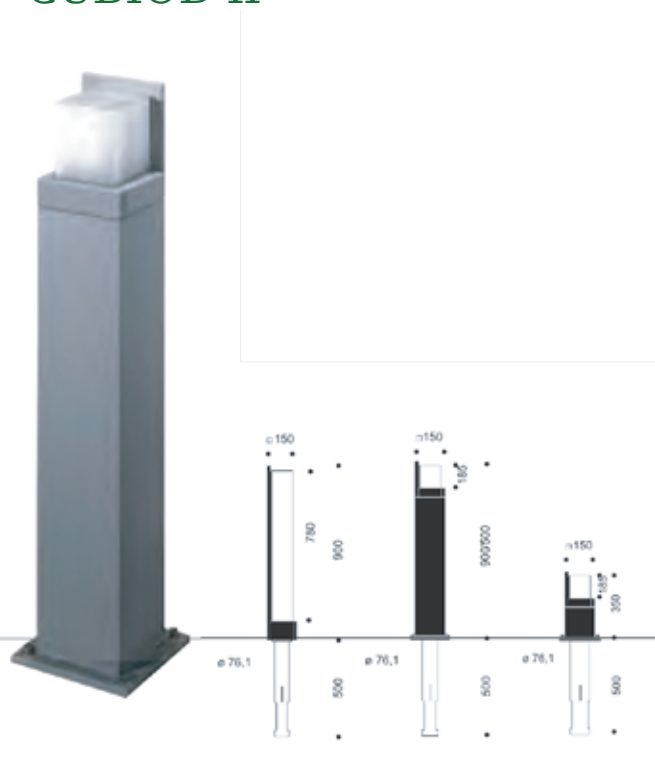

FOCUS

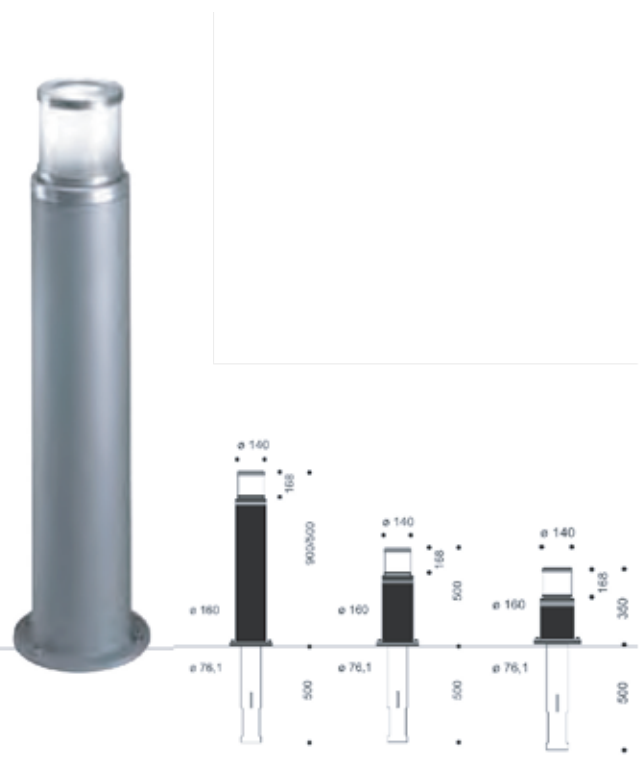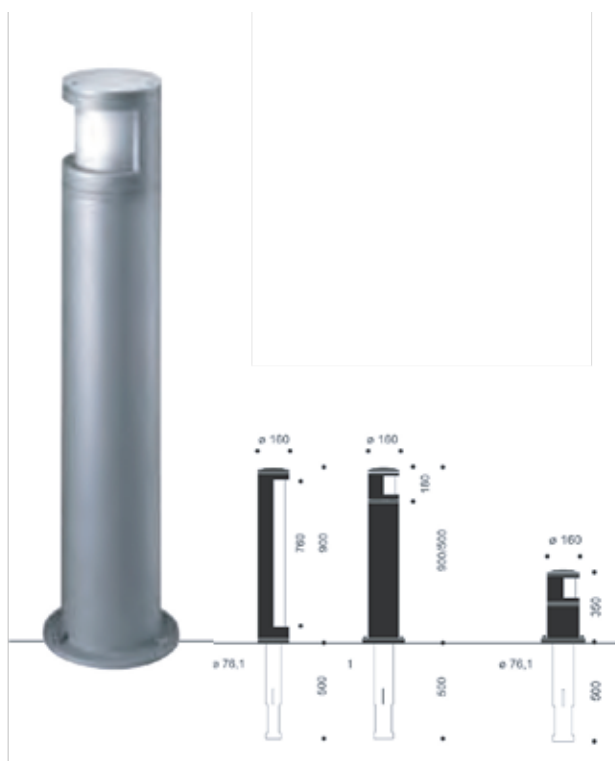

Code	Power	Lumen	CCT	CRI	Housing
CUBOID I & II	3W-10W	270lm-900lm	3000K-5000K	>80	Extrusion
FOCUS	3W-10W	270lm-900lm	3000K-5500K	>80	Aluminium

*Lumens calculated on 3000k



TIRAS



COMET




Code	Power	Lumen	CCT	CRI	Housing
TIRAS	3W-10W	270lm-900lm	3000K-5000K	>80	Aluminium
COMET	10W-30W	900lm-2700lm	3000K-5500K	>80	Aluminium


*Lumens calculated on 3000k



RAIL

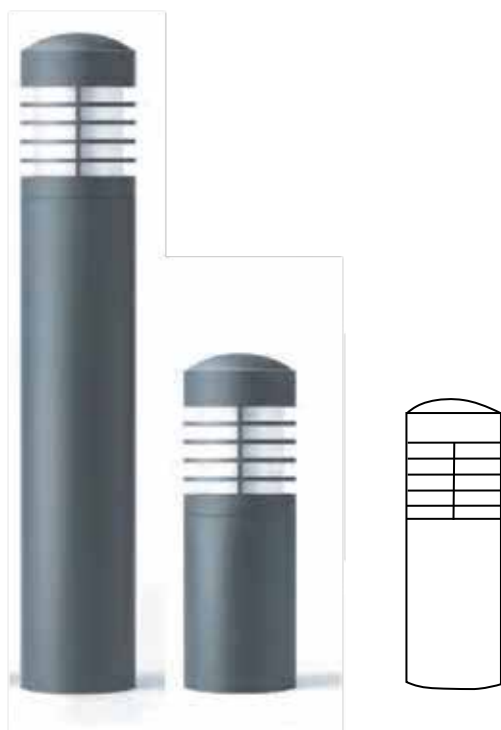

RAIL H

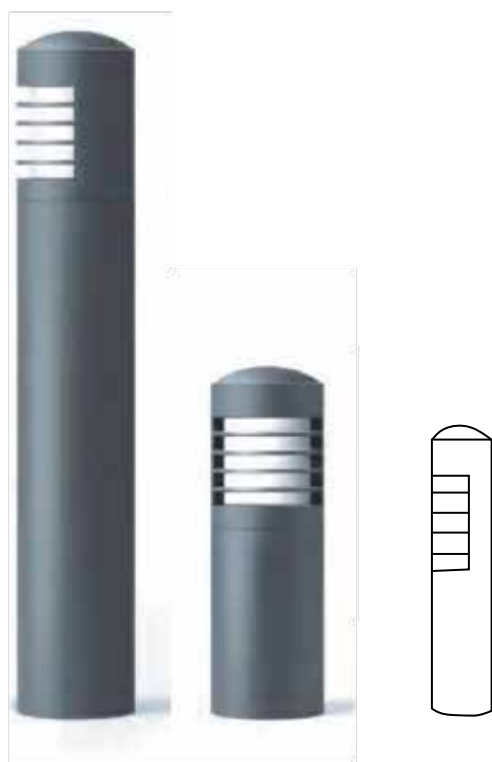

Code	Power	Lumen	CCT	CRI	Housing
RAIL	5W-20W	450lm-1800lm	3000K-5000K	>80	Aluminium
RAIL H	5W-20W	450lm-1800lm	3000K-5500K	>80	Aluminium


*Lumens calculated on 3000k




ARENA



BLOOM

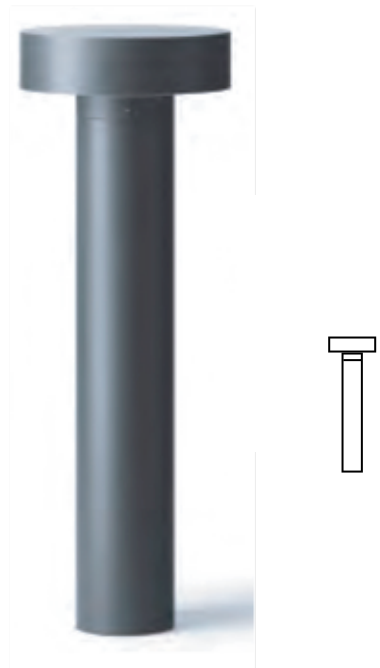

SOLAR

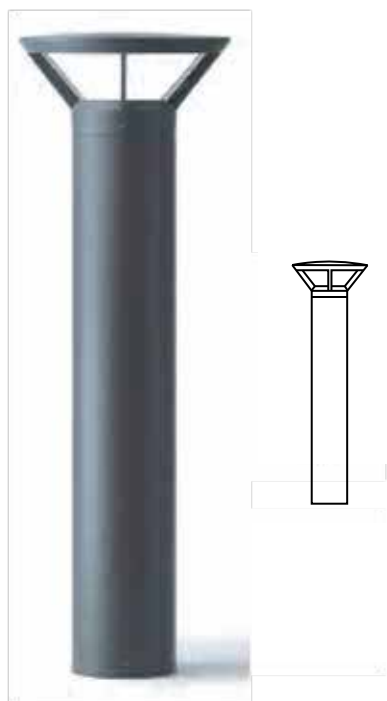


Code	Power	Lumen	CCT	CRI	Housing
ARENA	10W-20W	900lm-1800lm	3000K-5000K	>80	Aluminium
BLOOM	6W-30W	540lm-2700lm	3000K-5500K	>80	Aluminium
SOLAR	6W-30W	540lm-2700lm	3000K-5500K	>80	Aluminium

*Lumens calculated on 3000k



BARON

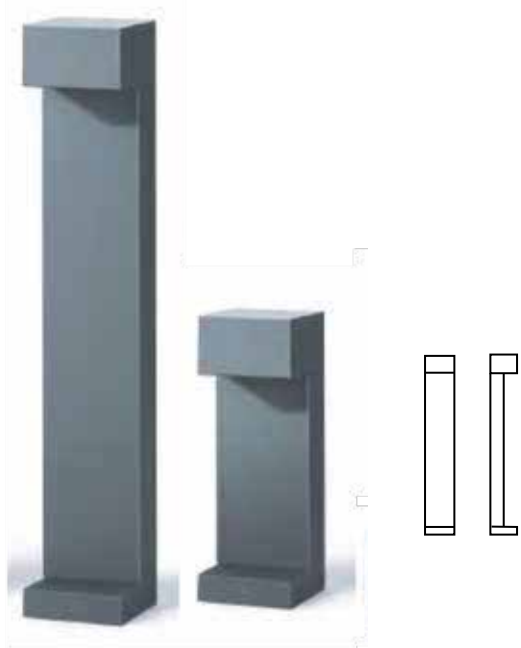

PYRAMID




Code	Power	Lumen	CCT	CRI	Housing
BARON	5W-15W	450lm-1350lm	3000K-5000K	>80	Aluminium
PYRAMID	12W-20W	1080m-1800lm	3000K-5500K	>80	Aluminium


*Lumens calculated on 3000k



RISERS

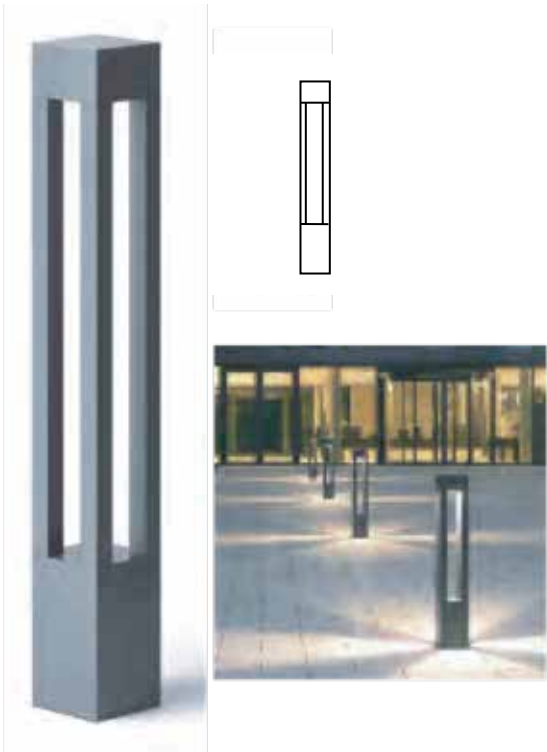

HOLLOW

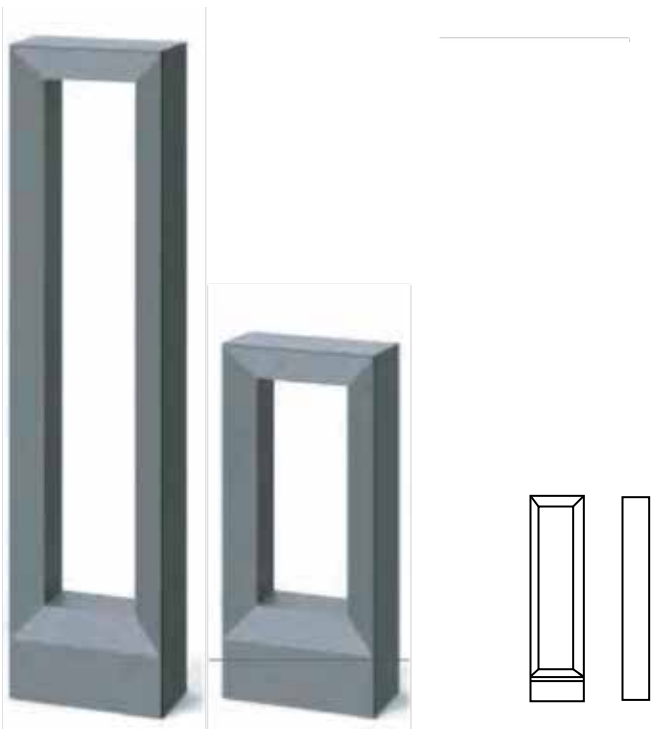

Code	Power	Lumen	CCT	CRI	Housing
RISERS	5W-15W	450lm-1350lm	3000K-5000K	>80	Aluminium
HOLLOW	3W-10W	270m-900lm	3000K-5500K	>80	Aluminium

*Lumens calculated on 3000k



OMNI



TRIMLESS




Code	Power	Lumen	CCT	CRI	Housing
OMNI	10W-30W	450lm-1350lm	3000K-5000K	>80	Extrude Al.
TRIMLESS	10W-40W	900lm-3600lm	3000K-5500K	>80	Aluminium

*Lumens calculated on 3000k



TRIPOD

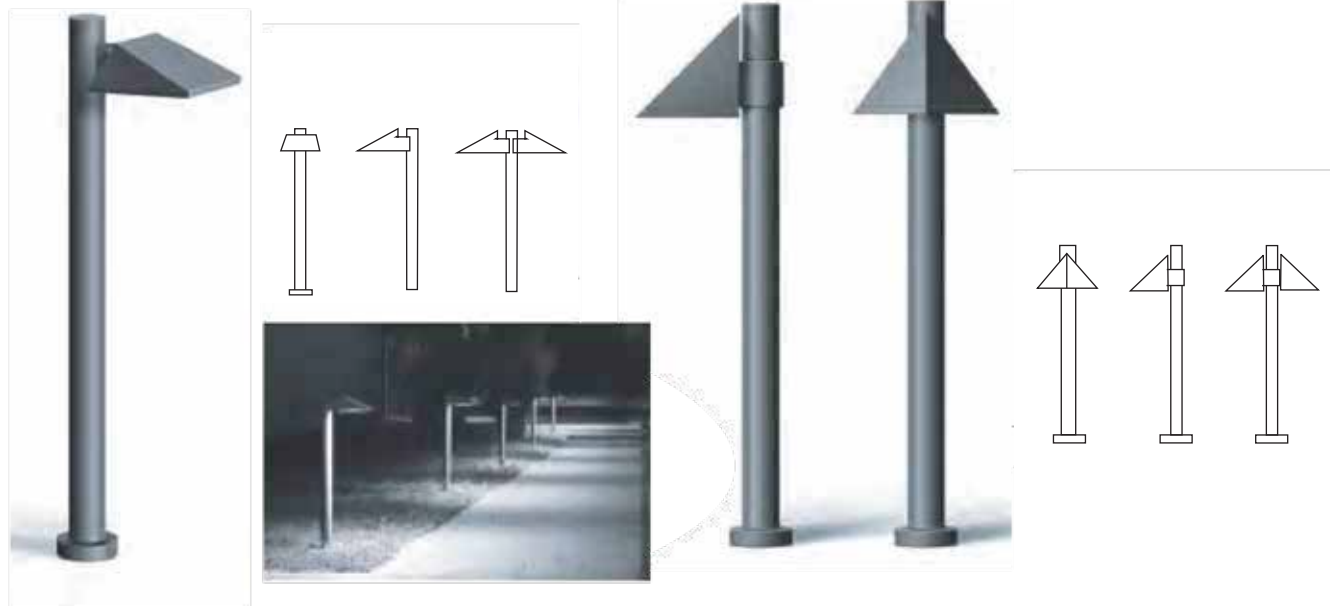

SCOTT BOLLARD




Code	Power	Lumen	CCT	CRI	Housing
TRIPOD	18W-30W	1620lm-2700lm	3000K-5000K	>80	Aluminium
SCOTT BOLLARD	3W-15W	270lm-1350lm	3000K-5500K	>80	Aluminium



*Lumens calculated on 3000k



COIN



COIN I



Code	Power	Lumen	CCT	CRI	Housing
COIN	18W-30W	1620lm-2700lm	3000K-5000K	>80	Aluminium
COIN I	18W-30W	1620lm-2700lm	3000K-5500K	>80	Aluminium



*Lumens calculated on 3000k



VIVO



BRICK





Code	Power	Lumen	CCT	CRI	Housing
VIVO	3W-15W	270lm-1350lm	3000K-5000K	>80	Extrude Al.
BRICK	3W-10W	270lm-900lm	3000K-5500K	>80	Aluminium



*Lumens calculated on 3000k



LOOK



CORNER





Code	Power	Lumen	CCT	CRI	Housing
LOOK	3W-10W	270lm-900lm	3000K-5000K	>80	Aluminium
CORNER	3W-10W	270lm-900lm	3000K-5500K	>80	Aluminium



*Lumens calculated on 3000k



DESK



LUNE



Code	Power	Lumen	CCT	CRI	Housing
DESK	5W-10W	450lm-900lm	3000K-5000K	>80	Aluminium
LUNE	5W-10W	450lm-900lm	3000K-5500K	>80	Aluminium

*Lumens calculated on 3000k



Bollards



RISERS- M3M LATTITUDE (GURGAON)



HOLLOW - M3M GOLF ESTATE



MIRAGE MINI - BROADWAY



MIRAGE MINI – BROADWAY



HOLLOW – M3M GOLD ESTATE



Street Light

Street light

APRICA

Special Mould

Generation 4



Features :

- High quality finishing and aesthetic design of the APRICA compliments and enhances any landscape.
- This range was developed to incorporate two different sizes of street light luminaire, a wall bracket and a rear bracket versions so that streets, side-streets and large pavements can be lit using same street light design.
- Non-clip open design for easy operation and maintenance.
- Combined optic lense for a wide variety of road requirements.



Specifications :

- High strength, anti corrosion, die-cast aluminium body
- Durable electrostatic powder painting for harsh outdoor applications.
- Maintainance friendly.





Street light

Code	Power	Lumen	CCT	CRI
APRICA				
20W-80W	20W/40W/60W/80W	2000lm-8000lm	5500K/4000K/3000K	>80
APRICA L				
80W-180W	80W/100W/150W/180W	8000lm-18000lm	5500K/4000K/3000K	>80



*Lumens calculated on 3000k



APRICA

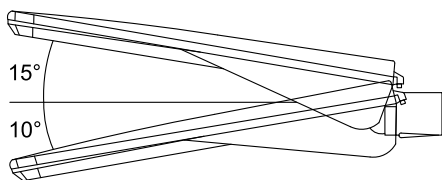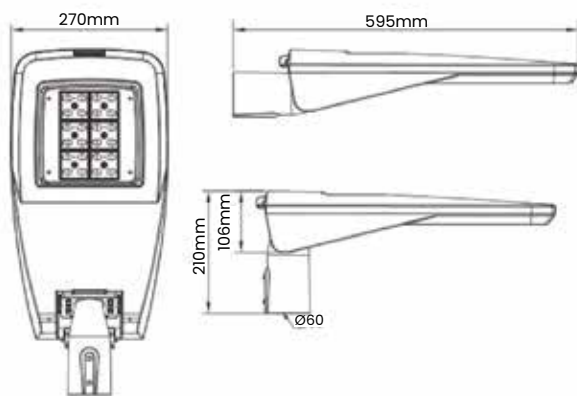


APRICA L

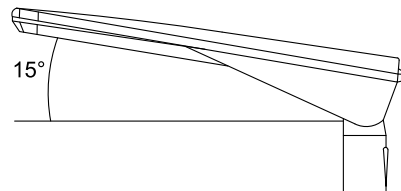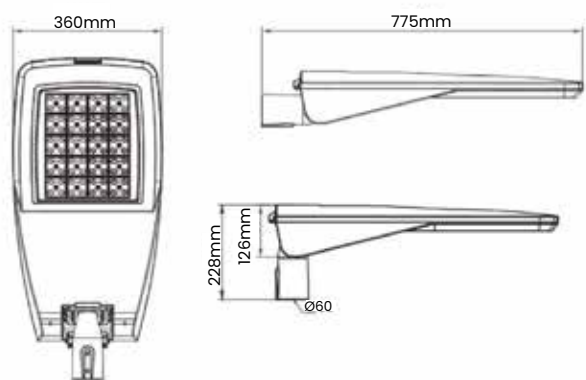





Application:
Walkway/Path/Side of the road/on e-way street

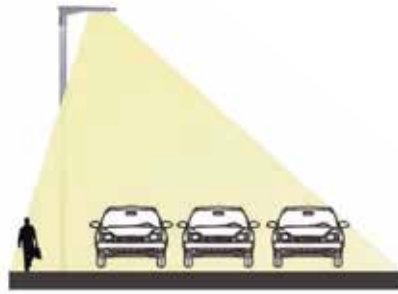

Application:
Highway/The Drive Way/Area/Paking Lot



Application:
Urban/Street Road/Two Drive Way

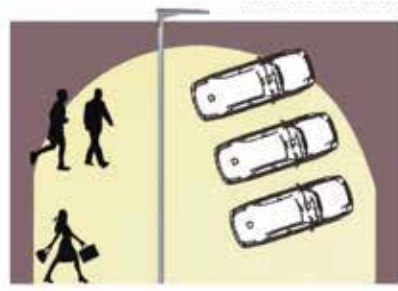

Application:
Square/Parking/Area



Street light

SPACE NEW

Special Mould

Generation 4



Features :

- A distinctive LED streetlight luminaire characterised by efficiency and innovative design.
- Designed as the ultimate multi-purpose streetlight luminaire, the ABORE is fully adaptable and can be equipped with combined optic lens for a wide variety of road requirements.
- The ABORE luminaire has uniquely designed cooling fins to keep the drivers and LEDs cool ensuring long life and high LED lumen maintainance.
- The ABORE luminaire features a simple and effective mounting system, allowing side-entry or post-top mounting.
- This range was developed to incorporate three different sizes of streetlight luminaire



Specifications :

- High strength, anti corrosion, die-cast aluminium body
- Durable electrostatic powder painting for harsh outdoor applications
- Maintainance friendly.




Ireo Victory Valley, Gurgaon


Code	Power	Lumen	CCT	CRI
SPACE NEW S				
40W-60W	40W/60W	4000lm-6000lm	5500K/4000K/3000K	>80
SPACE NEW M				
80W-100W	80W-100W	8000lm-10000lm	5500K/4000K/3000K	>80
SPACE NEW L				
120-180W	120W/150W/180W	12000lm-18000lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k

SPACE NEW -S

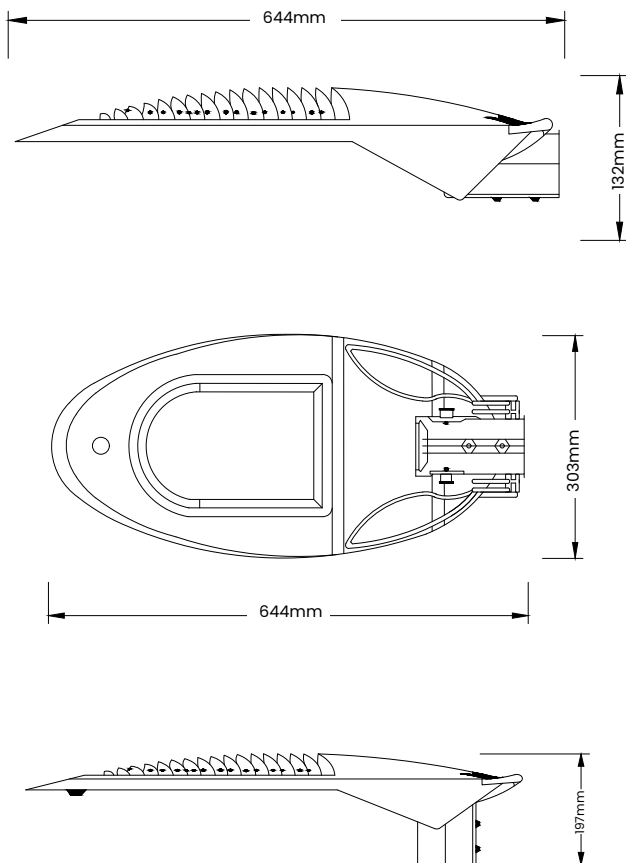

SPACE NEW -L

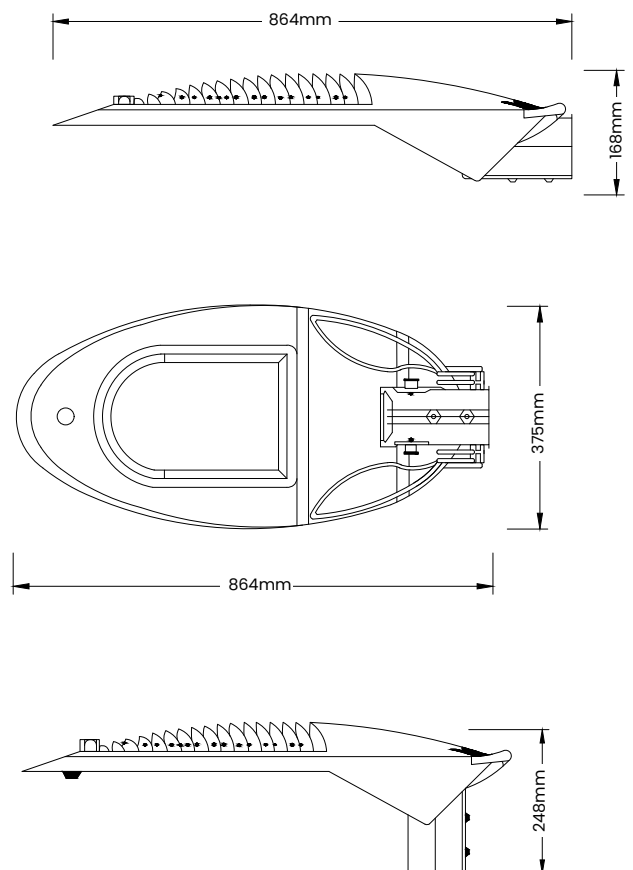





DLF ULTIMA, GURGAON



DLF ULTIMA, GURGAON



DLF ULTIMA, GURGAON

Street light

ECO SERIES

Special Mould
Generation 4



Features :

- Streamline design using state of the art technology with high efficiency and energy saving design.
- The ECO SERIES features a simple and effective mounting system, allowing side-entry or post-top mounting.
The ideal instrument for urban environment
- This range was developed to incorporate three different sizes of streetlight luminaire.
- Designed as the ultimate multi-purpose streetlight luminaire, the ECO SERIES fully adaptable and can be equipped with combined optic lens for a wide variety of road requirements.



Specifications :


- High strength, anti corrosion, die-cast aluminium body.
- Durable electrostatic powder painting for harsh outdoor applications.
- Maintenance friendly.



Code	Power	Lumen	CCT	CRI
ECO- S				
20W-50W	20W/40W/50W	2000lm-5000lm	5500K/4000K/3000K	>80
ECO- M				
60W-100W	60W/80W/100W	6000lm-10000lm	5500K/4000K/3000K	>80
ECO- L				
120-210W	120W/150W/180W/210W	12000lm-21000lm	5500K/4000K/3000K	>80


*Lumens calculated on 3000k

ECO -S




	Dimensions(mm)				
ECO	A1	B1	C1	D1	E1
	Ø48	90	92	473	190
ECO Mid	Ø60	90	98	505	190
	Ø48	90	112	631	295
ECO Maxi	Ø60	90	119	663	295
	Ø48	90	111	740	321
	Ø60	90	117	772	321

ECO -M



	Dimensions(mm)				
ECO	A3	B3	C3	D3	E3
	Ø48	90	181	459	190
ECO Mid	Ø60	90	181	465	190
	Ø76	135	231	475	190
ECO Maxi	Ø48	90	203	617	295
	Ø60	90	203	623	295
	Ø76	135	253	633	295
	Ø48	90	200	726	321
	Ø60	90	200	732	321
	Ø76	135	250	742	321

ECO -L

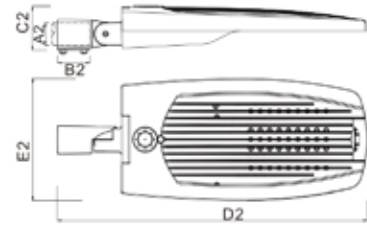

	Dimensions(mm)				
ECO	A2	B2	C2	D2	E2
	Ø48	90	92	555	190
ECO Mid	Ø60	90	97	555	190
	Ø76	135	107	605	190
ECO Maxi	Ø48	90	112	713	295
	Ø60	90	119	713	295
	Ø76	135	129	763	295
	Ø48	90	110	821	321
	Ø60	90	115	821	321
	Ø76	135	125	872	321



Street light

FUTURE SERIES

Special Mould
Generation 4



Features :

- Streamline design using state of the art technology with high efficiency and energy saving design.
- This range was developed to incorporate three different sizes of streetlight luminaire with the lumen package scalable upto 32000lm and with numerous lighting distributions.
- Designed as the ultimate multi-purpose streetlight luminaire, the FUTURE SERIES is fully adaptable and can be equipped with combined optic lens for a wide variety of road and urban requirements.



Specifications :

- High strength, anti corrosion, die-cast aluminium body.
- Durable electrostatic powder painting for harsh outdoor applications.
- Maintenance friendly.



Code	Power	Lumen	CCT	CRI
FUTURE - S				
20W-80W	20W-80W	2000lm-8000lm	5500K/4000K/3000K	>80
FUTURE - M				
90W-170W	90W-170W	9000lm-17000lm	5500K/4000K/3000K	>80
FUTURE - L				
200-300W	200W-300W	20000lm-30000lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k




FUTURE -S




FUTURE -M



FUTURE -L

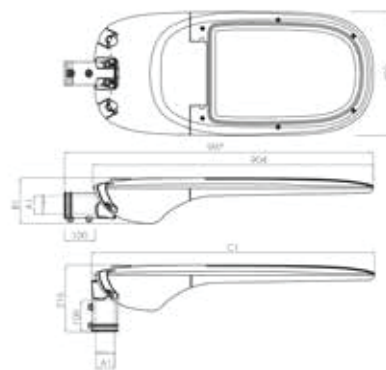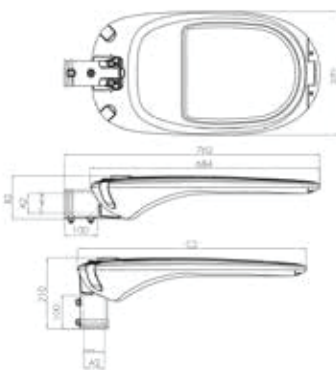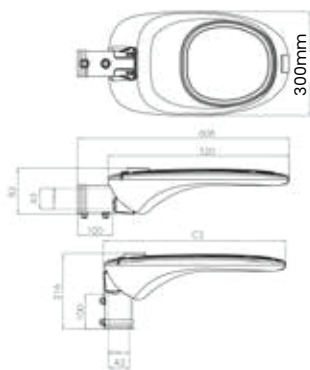

Power-off protection



Surge protection

Street light

CURVE SERIES

Special Mould
Generation 4



Features :

- Streamline design using state of the art technology with high efficiency and energy saving design.
- The CURVE range lumen package is scalable upto 25000lm and with numerous lighting distributions.
- Designed as the ultimate multi-purpose streetlight luminaire, the CURVE SERIES is fully adaptable and can be equipped with combined optic lens for a wide variety of road and urban requirements.
- The CURVE SERIES features a simple and effective mounting system, allowing side-entry or post-top mounting.
- This range was developed to incorporate three different sizes of streetlight luminaire with a wall bracket and a rear bracket version so that streets, side-streets and large pavements can be lit using same streetlight design.




Specifications :

- High strength, anti corrosion, die-cast aluminium body.
- Durable electrostatic powder painting for harsh outdoor applications.
- Maintainance friendly.


Code	Power	Lumen	CCT	CRI
CURVE				
40W-80W	40W/60W/80W	4000lm-8000lm	5500K/4000K/3000K	>80
CURVE L				
80W-180W	80W/100W/150W/180W	8000lm-18000lm	5500K/4000K/3000K	>80
CURVE I				
40W-240W	40W/80W/120W/150W/180W/240W	4000lm-24000lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k


CURVE

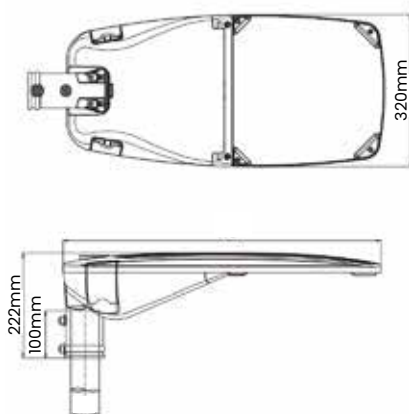

CURVE L

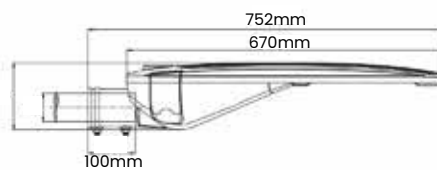

CURVE I



Street light

SHUTTLE SERIES

Special Mould

Generation 4



Features :

- The SHUTTLE SERIES ensemble was specially developed for urban lighting.
- Can be used in large avenues to narrow streets, the various configurations provide aesthetic distinctive identity for the city landscape.
- The SHUTTLE SERIES features a simple and effective mounting system, allowing side-entry or post-top mounting.
- The multiplicity of lighting column heights and luminaire sizes provide this range with a large palette of urban applications.
- The SHUTTLE SERIES results in a column with an assertive design that blends into any contemporary urban environment.
- The multiplicity of lighting column heights and luminaire sizes provide this range with a large palette of urban applications.



Specifications :


- High strength, anti corrosion, die-cast aluminium body
- Durable electrostatic powder painting for harsh outdoor applications
- Maintenance friendly.




Code	Power	Lumen	CCT	CRI
SHUTTLE				
20W-160W	20W-160W	2000lm-16000lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k


SHUTTLE

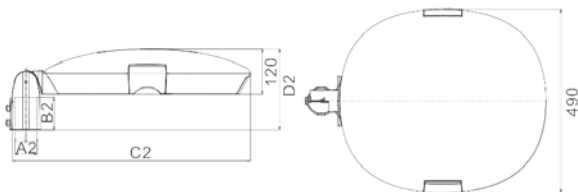


A2	B2	C2	D2
Ø48	90	636	215
Ø60	86	636	215
Ø76	135	636	265

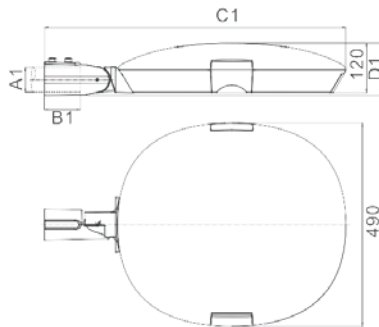


A1	B1	C1	D1
Ø48	90	725	120
Ø60	86	725	127
Ø76	135	775	137

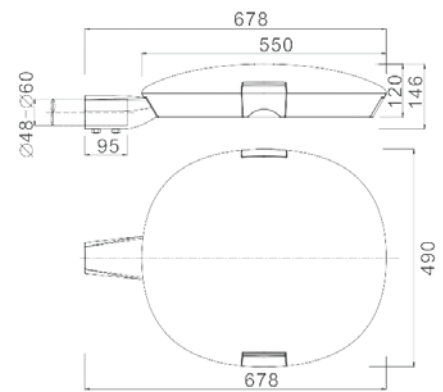


SHUTTLE H

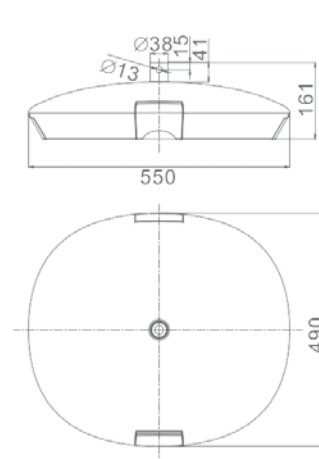

SHUTTLE B

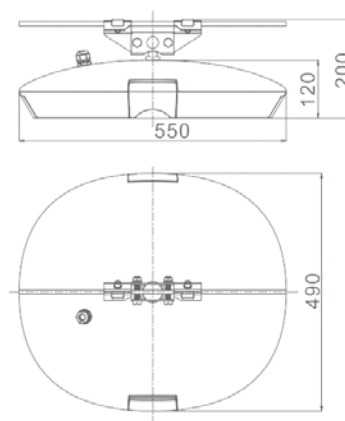

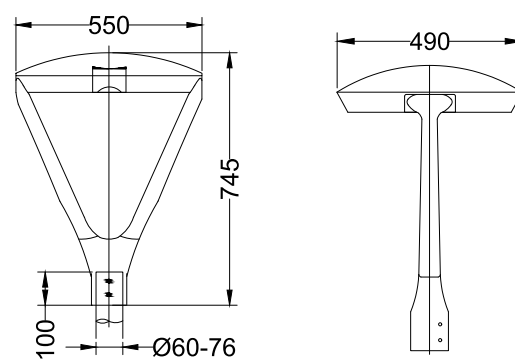

SHUTTLE V



Street light

FALCON

Special Mould

Generation 4




Features :

- The FALCON LED streetlight luminaire combines efficiency aesthetics and visual comfort with it's elegance and it's high performane photometry.
- This streetlight luminaire is a distinctive tool to light urban centres, residential streets and road lighting.
- It offers towns and cities the ideal tool to improve lighting levels
- Composed of high-quality materials, the FALCON streetlight is built to last using state-of- the- art technology.
- This range was developed to incorporate three different sizes of streetlight luminaire
- The FALCON features a simple and effective mounting system, allowing side-entry or post-top mounting.




Specifications :


- High strength, anti corrosion, die-cast aluminium body
- Electrostatic powder painting, for harsh outdoor applications
- Maintainance friendly.




TYPE1




TYPE2



TYPE3



TYPE4





TYPE5

Code	Power	Lumen	CCT	CRI
FALCON - S				
40W-80W	40W-80W	4000lm-8000lm	5500K/4000K/3000K	>80
FALCON - M				
90W-150W	90W-150W	9000lm-15000lm	5500K/4000K/3000K	>80
FALCON - L				
200-160W	200W-160W	2000lm-16000lm	5500K/4000K/3000K	>80


*Lumens calculated on 3000k




FALCON - L

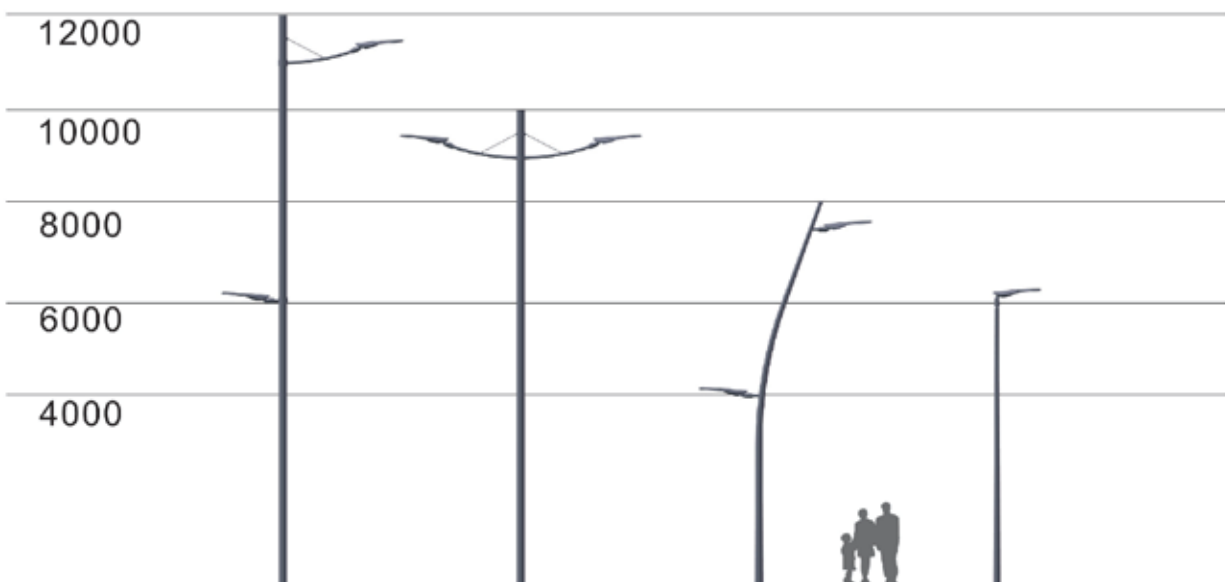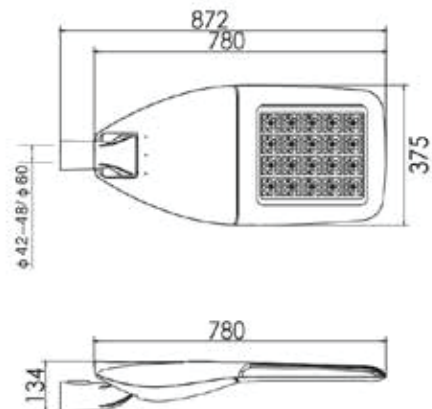

FALCON - S

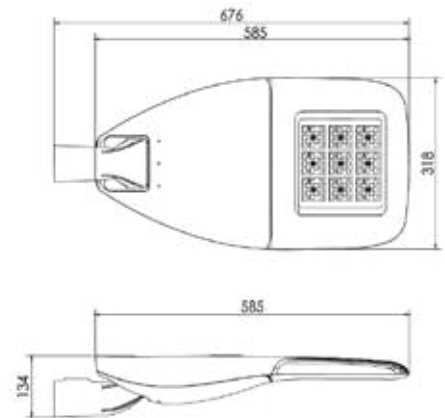

FALCON - M

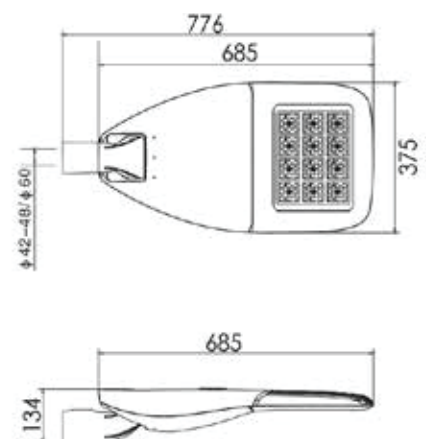

Street light

DROP

Special Mould
Generation 4




Features :

- The DROP LED streetlight luminaire combines efficiency aesthetics and visual comfort with it's elegance and it's high performane photometry.
- This streetlight luminaire is a distinctive tool to light urban centres, residential streets and road lighting.
- It offers towns and cities the ideal tool to improve lighting levels
- Composed of high-quality materials, the DROP streetlight is built to last using state-of- the- art technology.
- This range was developed to incorporate three different sizes of streetlight luminaire
- The DROP features a simple and effective mounting system, allowing side-entry or post-top mounting.



Specifications :




- High strength, anti corrosion, die-cast aluminium body.
- Electrostatic powder painting for harsh outdoor applications.
- Maintenance friendly.

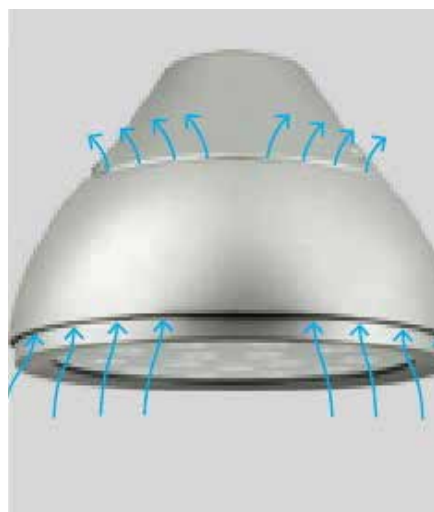

Code	Power	Lumen	CCT	CRI
DROP				
50W-160W	50W-160W	5000lm-16000lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k




DROP - S



Time



10s - 8min

DROP - M



Sens

0 - 12M



Street light

ABORE

Special Mould

Generation 4



Features :

- ABORE range allows multiple combinations of brackets on the lighting column.
- The circular design of ABORE streetlight luminaire fits perfectly in any urban environment whether traditional or contemporary.
- The multiplicity of lighting column heights and luminaire sizes provide this range with a large palette of urban applications.
- This range was developed to incorporate three different sizes of street light luminaire with a wall bracket and a rear bracket version so that streets, side-streets and large pavements can be lit using same street light design.



Specifications :

- High strength, anti corrosion, die-cast aluminium body.
- Electrostatic powder painting for harsh outdoor applications.
- Maintainance friendly.



ABORE at Karmalake Lands, Sector-80 (Gurgaon)



ABORE at DLF South Court Mall, Saket (Delhi)



KARMA LAKELANDS, MANESAR (GURGAON)



KARMA LAKELANDS, MANESAR (GURGAON)



DLF THE SOUTH COURT SAKET MALL, DELHI




UNITECH UNI WORLD RESORT (GURGAON)

Street light

Code	Power	Lumen	CCT	CRI
SPACE				
60W-150W	60W-150W	6000lm-15000lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k

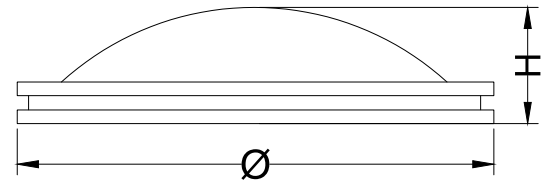

	ABORE-S	ABORE-M	ABORE-L
Ø	450 mm	550 mm	615 mm
H	60 mm	60 mm	70 mm



ABORE-S

ABORE-M

ABORE-L



Street light

SPACE

Special Mould

Generation 4



Features :

- The IRON streetlight luminaire is a groundbreaking model for compactness and elegance.
- A distinctive LED streetlight luminaire characterised by efficiency and innovative design.
- Designed as the ultimate multi-purpose streetlight luminaire, the IRON is fully adaptable and can be equipped with combined optic lens for a wide variety of road requirements.
- IRON streetlight luminaire fits in perfectly in any urban environment, whether traditional or contemporary.
- This range was developed to incorporate two different sizes of streetlight luminaire with a wall bracket and a rear bracket version so that streets, side-streets and large pavements can be lit using same streetlight design.





Specifications :

- High strength, anti corrosion, die-cast aluminium body.
- Electrostatic powder painting, for harsh outdoor applications.
- Maintenance friendly.

Street light

Code	Power	Lumen	CCT	CRI
ABORE				
60W-150W	60W-150W	6000lm-15000lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k

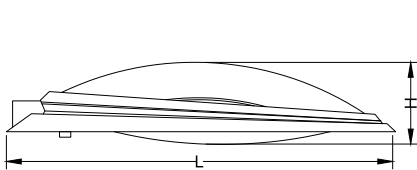

	SPACE-S	SPACE-M
L	715mm	927mm
H	125mm	165mm
W	245mm	324mm



IRON Streetlight at DLF ALAMEDA Township, (Gurgaon in 2011)

Street light

CIRCULAR SERIES

Special Mould

Generation 4



Features :

- The CIRCULAR SERIES ensemble was specially developed for urban lighting.
- Can be used in large avenues to narrow streets, the various configurations provide aesthetic distinctive identity for the city landscape.
- The CIRCULAR SERIES features a simple and effective mounting system, allowing side-entry or post-top mounting.
- The multiplicity of lighting column heights and luminaire sizes provide this range with a large palette of urban applications.
- The CIRCULAR SERIES results in a column with an assertive design that blends into any contemporary urban environment.
- The multiplicity of lighting column heights and luminaire sizes provide this range with a large palette of urban applications.



Specifications :

- High strength, anti corrosion, die-cast aluminium body
- Durable electrostatic powder painting for harsh outdoor applications
- Maintenance friendly.




Code	Power	Lumen	CCT	CRI
CIRCULAR SERIES				
40W-100W	40W/60W/100W	6000lm-10000lm	5500K/4000K/3000K	>80


*Lumens calculated on 3000k




CIRCULAR - S

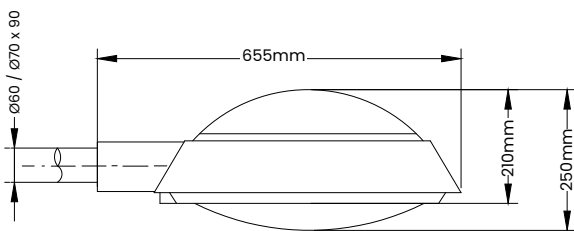


CIRCULAR - T

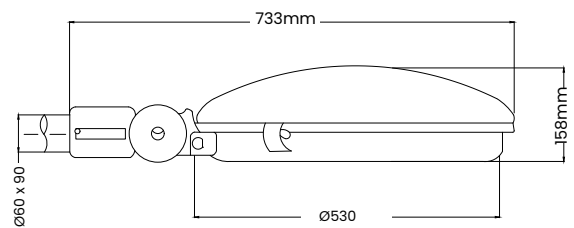

CIRCULAR - M

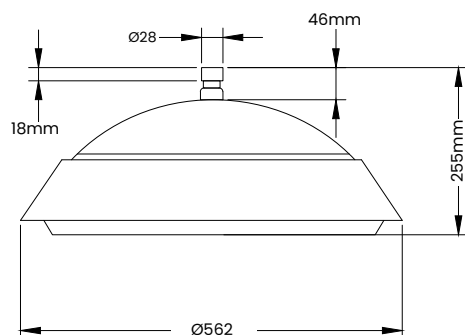

CIRCULAR - L

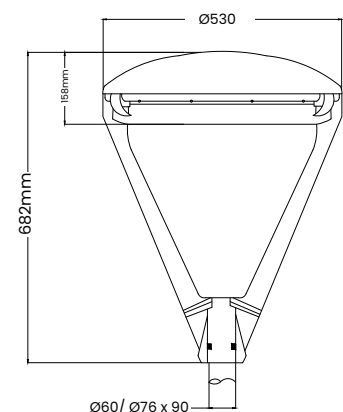

Street light

SHOE

Special Mould

Generation 4



Features :

- A distinctive LED luminaire characterised by efficiency and innovative design.
- The SHOE streetlight luminaire designed as the ultimate multi-purpose is fully adaptable and can be equipped with combined optic lens for a wide variety of road requirements.
- SHOE offers all the advantages of LED lighting, without high cost associated with LEDs.
- The SHOE features a simple and effective mounting system, allowing side-entry or post-top mounting.
- This range was developed to incorporate two different sizes of streetlight luminaire with a wall bracket and a rear bracket version so that streets, side-streets and large pavements can be lit using same streetlight design.





Specifications :

- High strength, anti corrosion, die-cast aluminium body
- Electrostatic powder painting, for harsh outdoor applications.
- Maintenance friendly.



Street light

Code	Power	Lumen	CCT	CRI
SHOE				
20W-120W	20W/40W/60W/100W/120W	2000lm-12000lm	5500K/4000K/3000K	>80



*Lumens calculated on 3000k



A



B



C



M3M Broadway




M3M Broadway



Street light

QUE SERIES

Special Mould
Generation 4

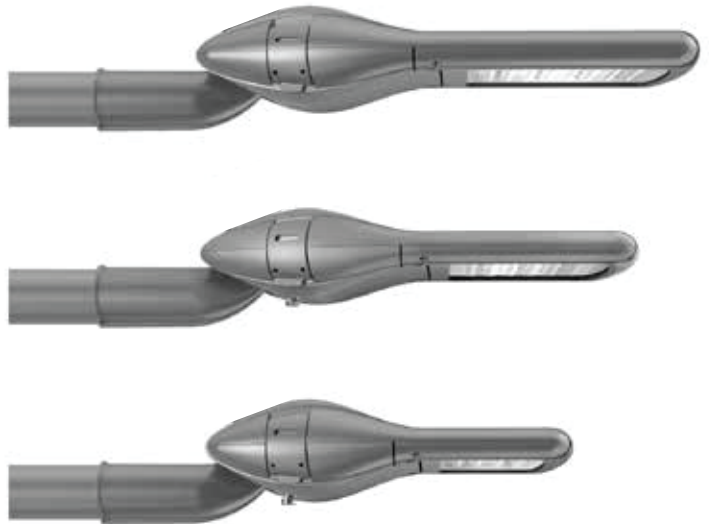

Features :

- The QUE SERIES is a lighting solution for a convivial ambiance.
- This elegant streetlight luminaire ensures a distinctive presence in the public space, both by day and by night.
- The QUE SERIES features a simple and effective mounting system, allowing side-entry or post-top mounting.
- This streetlight luminaire is designed as the ultimate multi-purpose and is fully adaptable and can be equipped with combined optic lens for a wide variety of road requirements.
- This range was developed to incorporate three different sizes of streetlight luminaire with a wall bracket and a rear bracket version so that streets, side-streets and large pavements can be lit using same streetlight design.




Specifications :

- High strength, anti corrosion, die-cast aluminium body
- Electrostatic powder painting, for harsh outdoor applications.
- Maintenance friendly.


Code	Power	Lumen	CCT	CRI
QUE				
30W-60W	30W/40W/60W	3600lm/4800lm/7200lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k


QUE - S

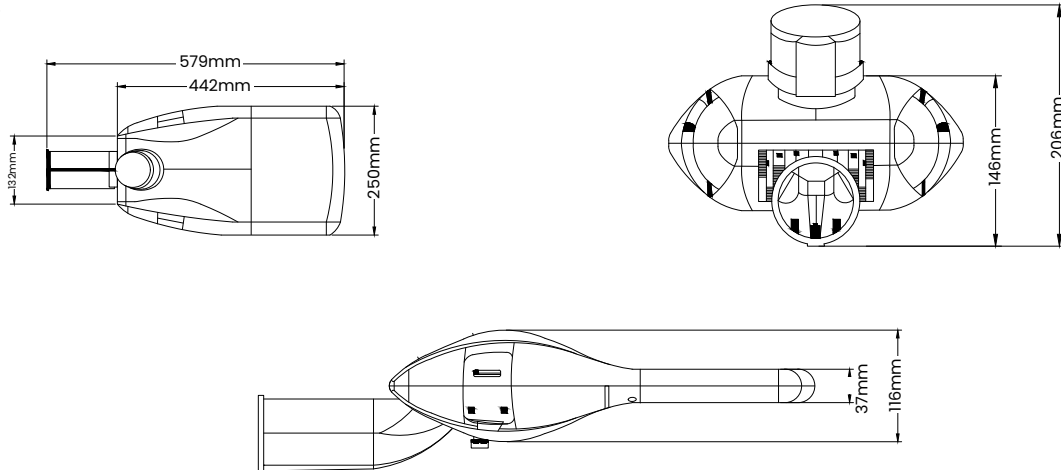

QUE - M

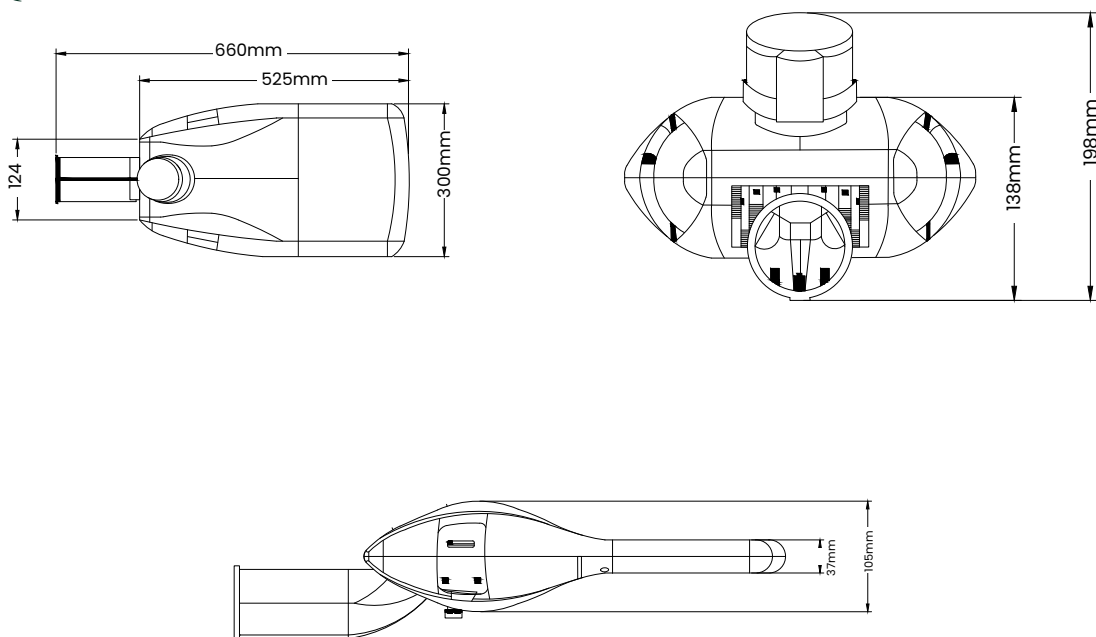

QUE - L

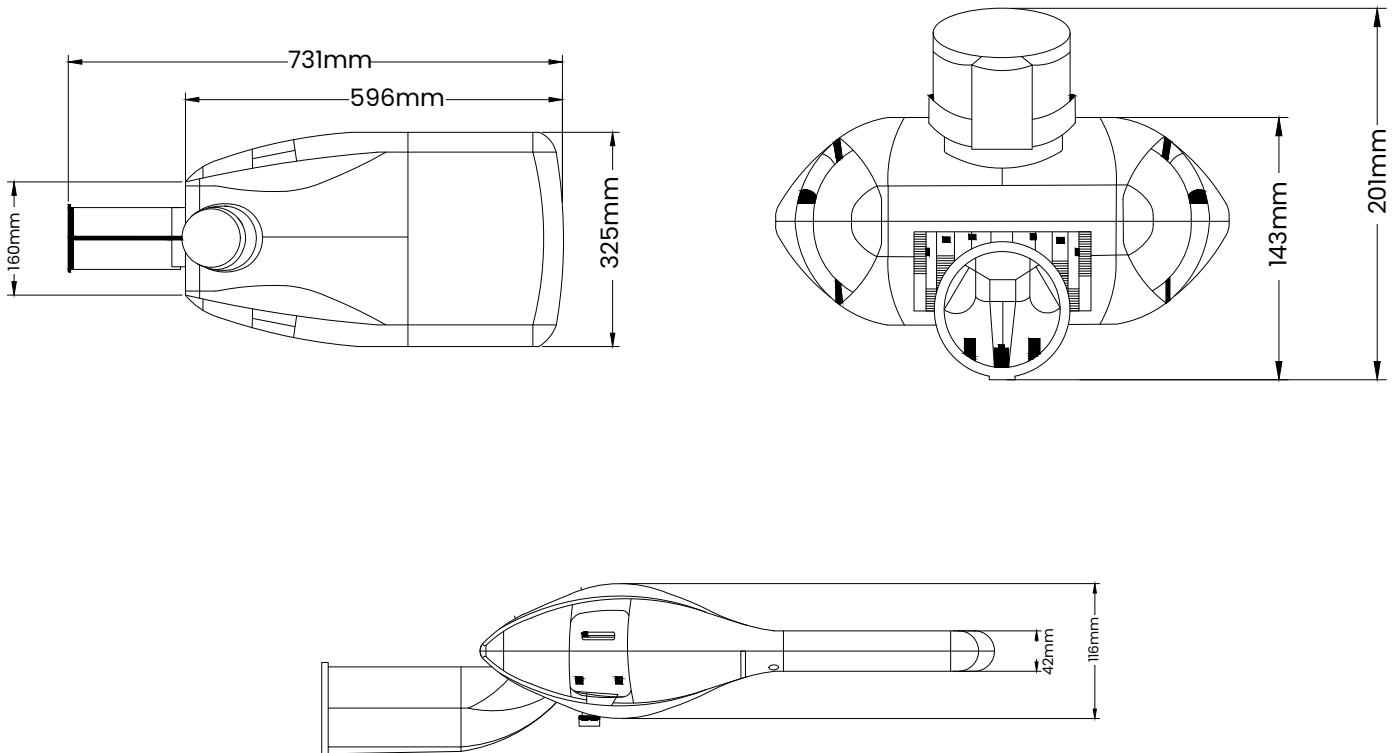

Street light

SEAL

Special Mould

Generation 4



Features :

- SEAL luminaire is ideally suited to lighting broad avenues, boulevards or squares.
- The SEAL ensemble is available in the form of lighting columns with single, double, triple brackets or with a rear bracket.
- Different lighting columns and heights are available.
- The SEAL luminaire is inspired by a kayak boat and is available in two sizes.



Specifications :

- Housing of the fixture is made of re-inforced technical polymer (RTP) making the luminaire vandal proof, shock proof and corrosion proof.
- SEAL comes with an independent and removable gear tray for easy maintainance.
- The cylindrical-conical lighting column is either made of galvanised steel or thermo-coated aluminium.
- Any RAL color is available on request.







UNITECH NALLAMBAKM (CHENNAI)

Street light

Code	Power	Lumen	CCT	CRI
SEAL S				
40W-80W	40W/60W/80W	4500lm-7200lm	5500K/4000K/3000K	>80
SEAL L				
100W-180W	100W/120W/150W/180W	9000lm-162000lm	5500K/4000K/3000K	>80

*Lumens calculated on 3000k

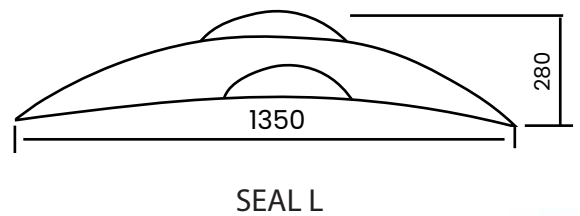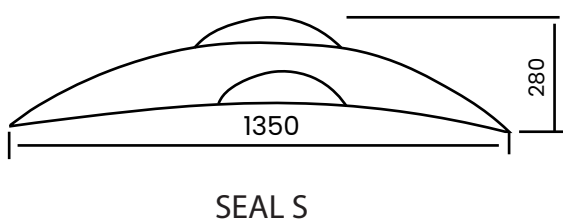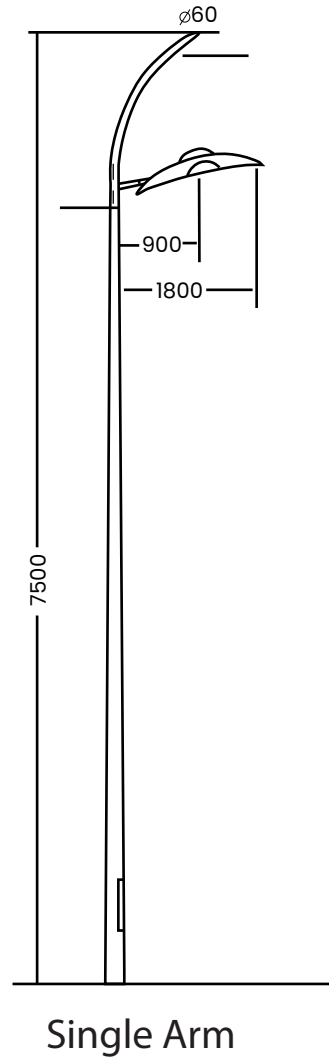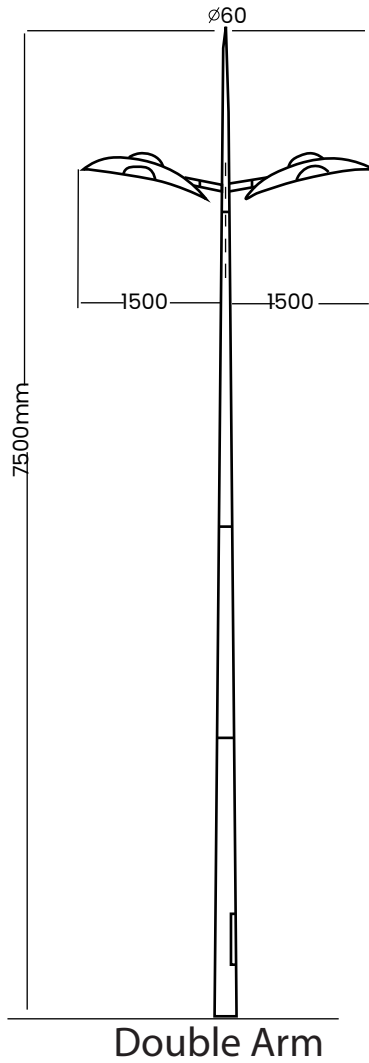



UNITECH NALLAMBAKM (CHENNAI)



UNITECH NALLAMBAKM (CHENNAI)



UNITECH NALLAMBAKM (CHENNAI)




UNITECH NALLAMBAKM (CHENNAI)




UNITECH NALLAMBAKM (CHENNAI)

Street light

POLE A

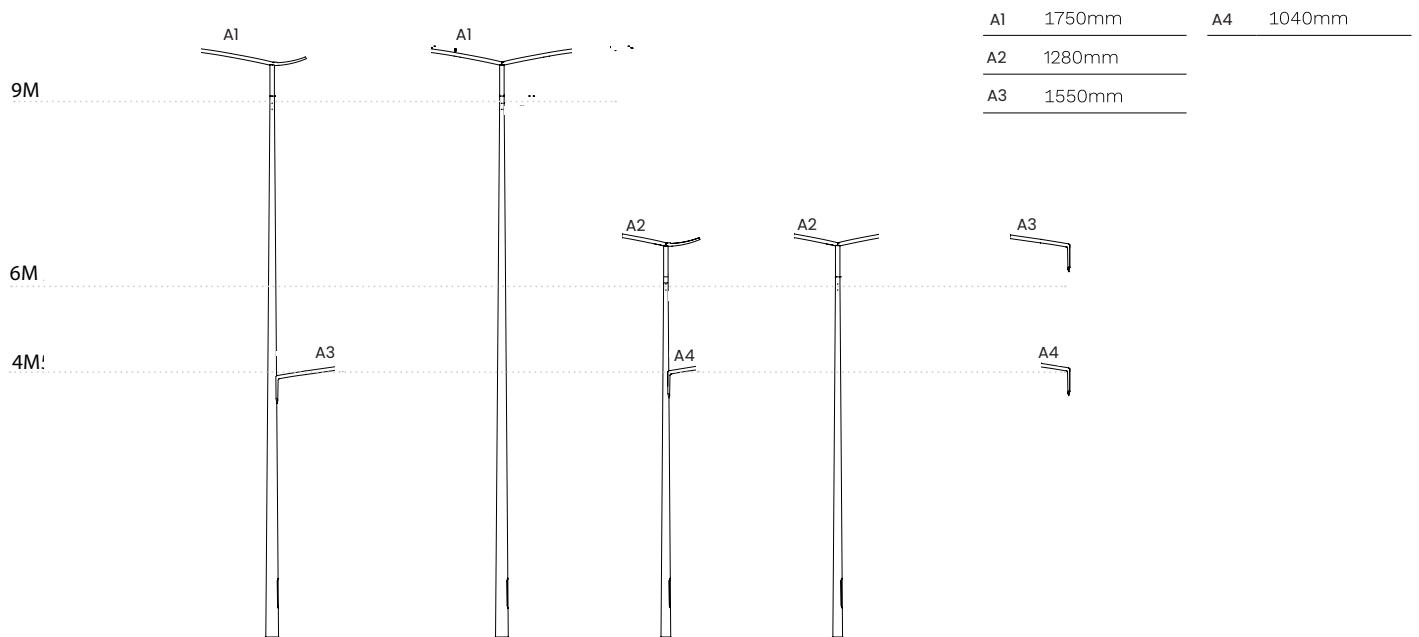


POLE B

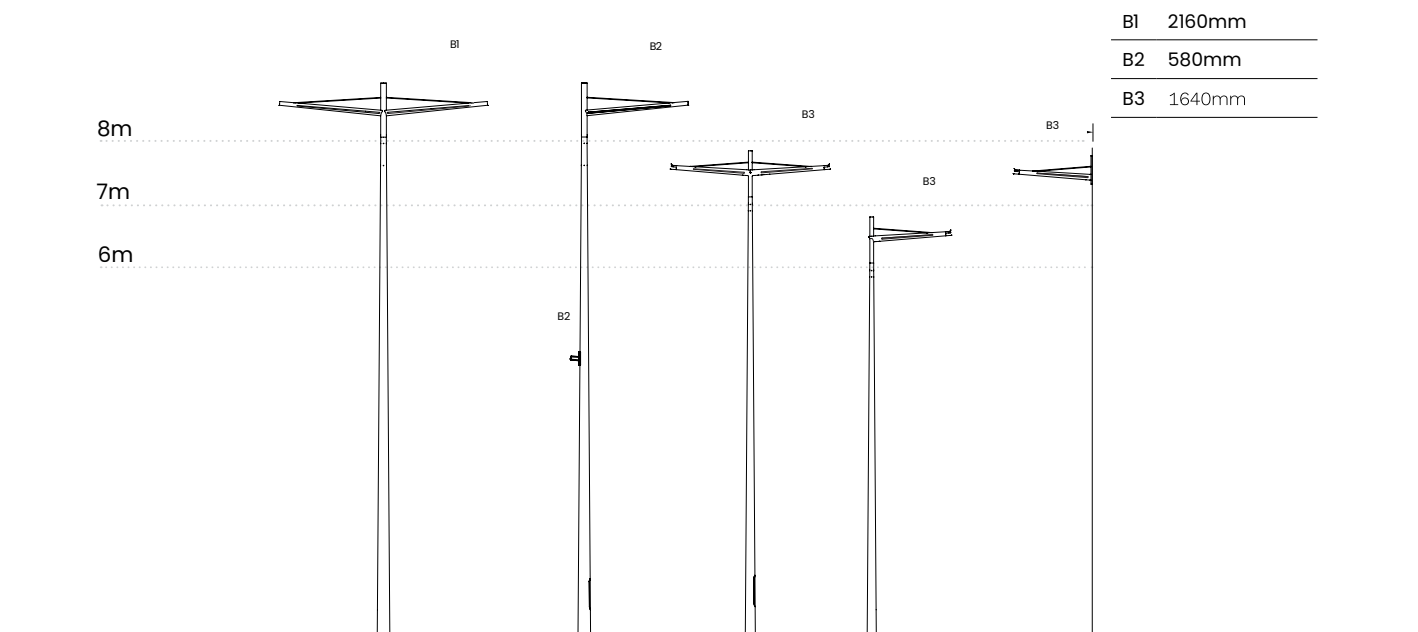


POLE C




POLE D

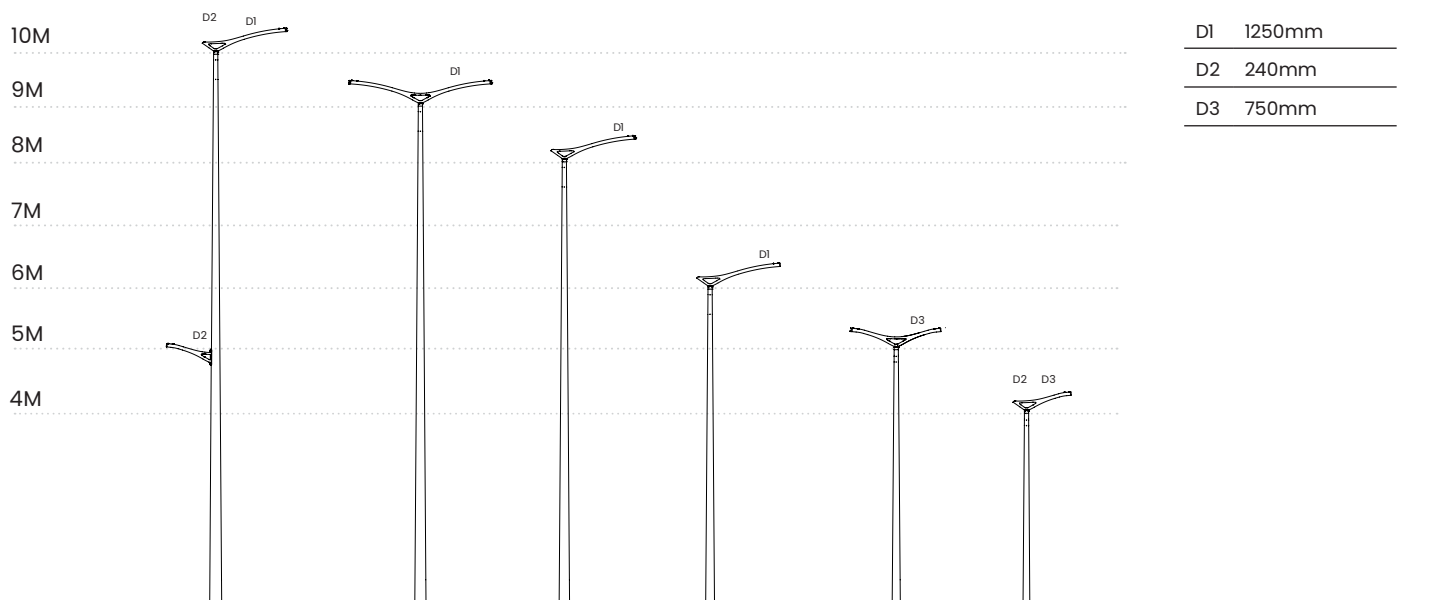

POLE E

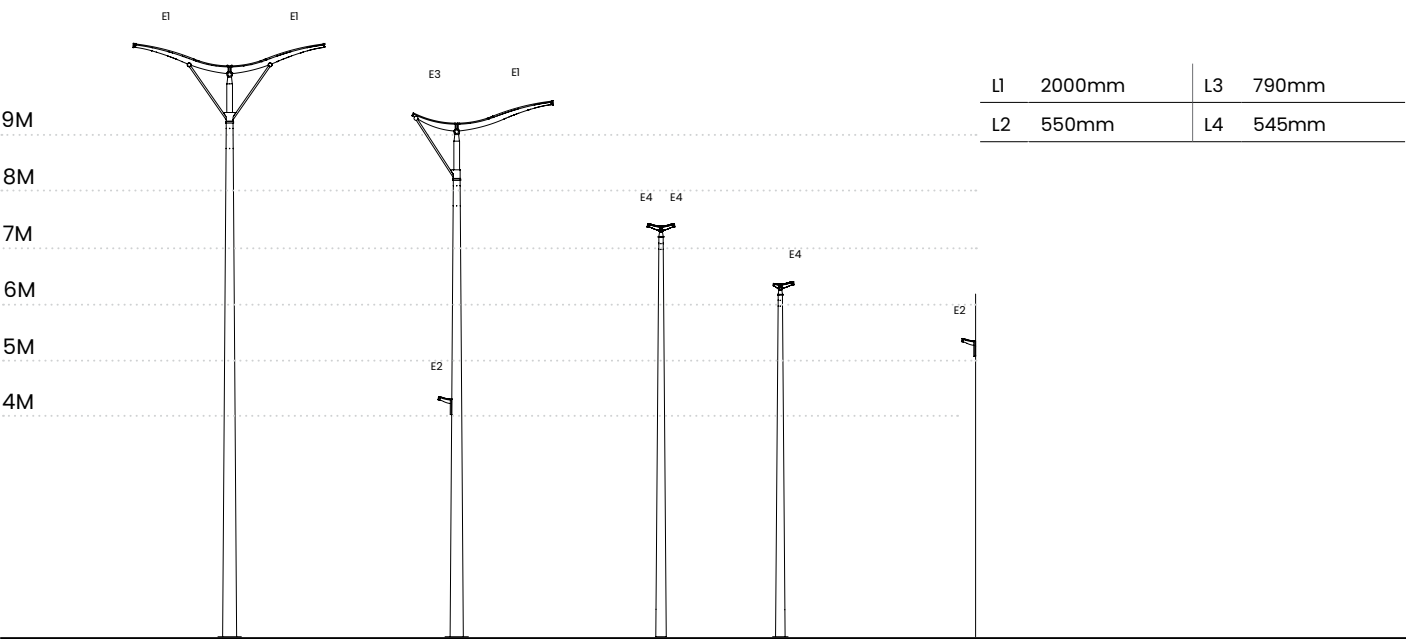

POLE F

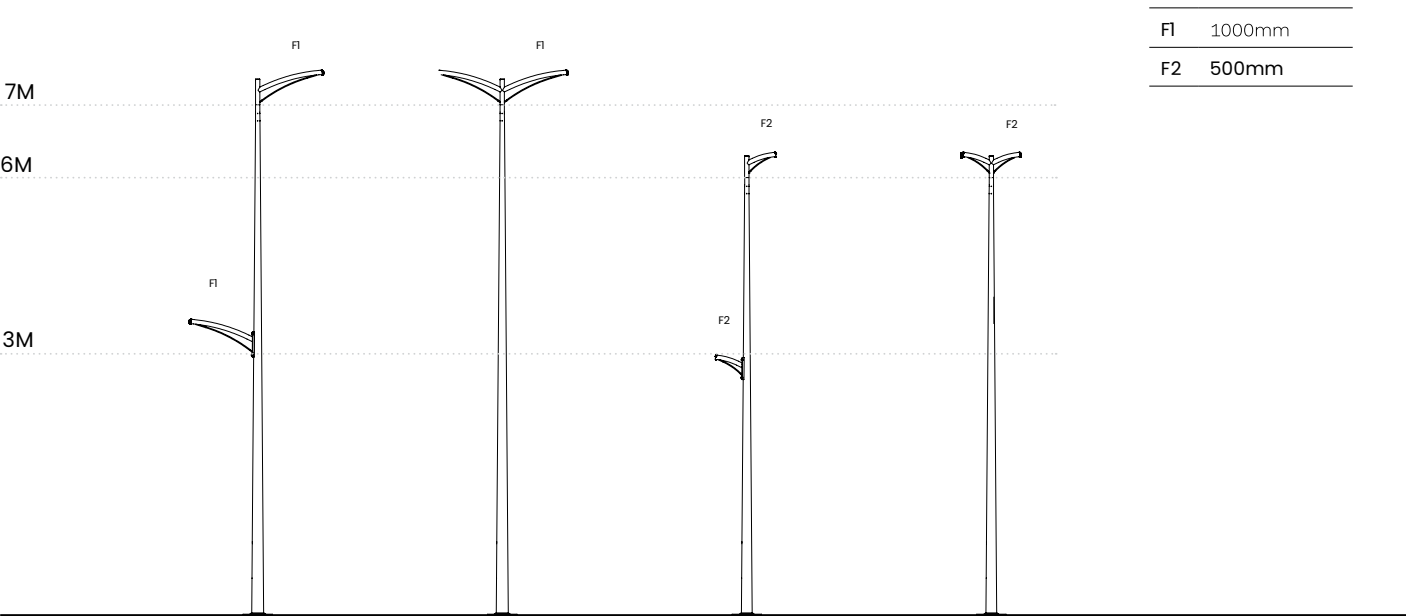



WALL LIGHT



Features:

- Decorative architectural wall mounted LED luminaire.
- The WALL lights family with aesthetic urban designs is available in numerous shapes, heights and sizes which is fitted with LED and integrated driver.
- The LED offers various light distributions from narrow to wide beam angles- for the place to be lit.
- These luminaires light up and down to create a pleasant and safe atmosphere.
- These sleek wall lights offer excellent vandal resistance, thanks to Robust materials (aluminium/ polycarbonate/ PMMA glass)
- These wall lights are for exterior and interior architectural facade accent.




Specifications:


- Aluminium extrusion stainless steel finished in electrostatic powder painting.
- Available in any RAL color (customization as per site request)
- Maintenance friendly.




TOD S

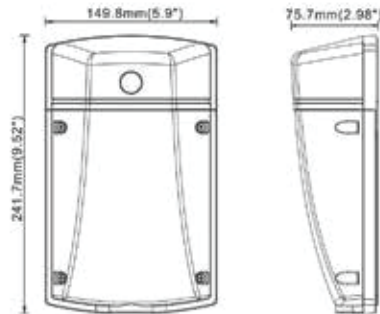

TOD M

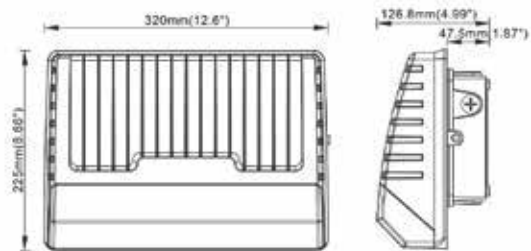


TOD L

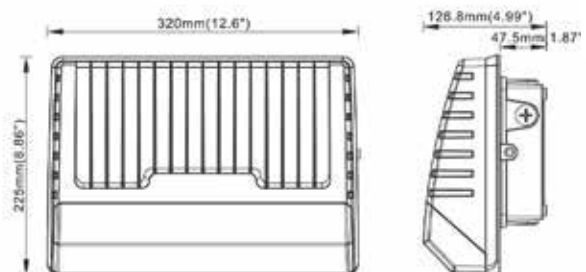


Code	Power	Lumen	CCT	CRI	Housing	Protection
TOD S	20W/30W	110lm/W	3000K-5000K	>80	Die Cast Aluminium	IP65
TOD M	30W/50W	110lm/W	3000K-5500K	>80	Die Cast Aluminium	IP65
TOD L	40W/60/80W/100W	110lm/W	3000K-5500K	>80	Die Cast Aluminium	IP65

QUAD S


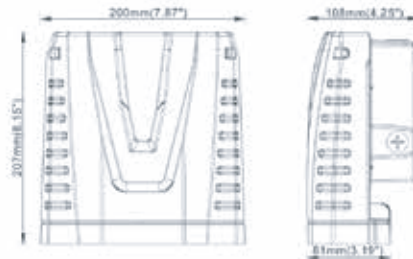


QUAD L

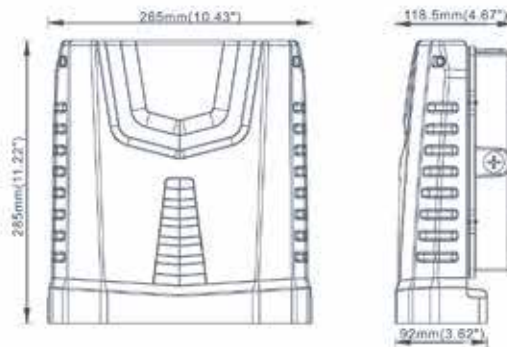


Code	Power	Lumen	CCT	CRI	Housing	Protection
QUAD S	20W/30W	110lm/W	3000K-5000K	>80	Die Cast Aluminium	IP65
QUAD L	40W/60/80W/100W	110lm/W	3000K-5500K	>80	Die Cast Aluminium	IP65


BOXI 6



BOXI 10




BOXI B




Code	Power	Lumen	CCT	CRI	Housing	Protection
BOXI 6	6W	80lm/W	3000K-5000K	>80	Aluminium	IP65
BOXI 9	10W	80lm/W	3000K-5500K	>80	Aluminium	IP65
BOXI B	6W/10W	80lm/W	3000K-5500K	>80	Aluminium	IP65

CURL

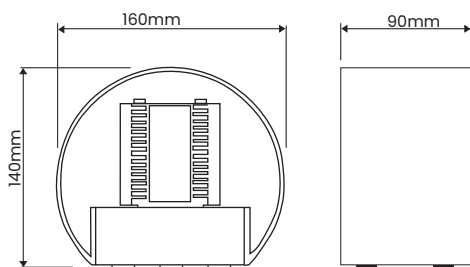


CURL L

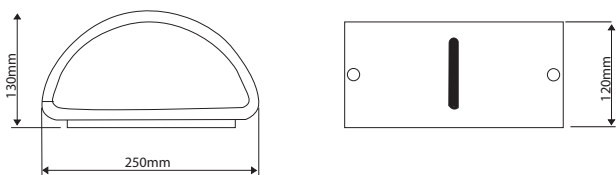


Code	Power	Lumen	CCT	CRI	Housing	Protection
CURL	6W/10W	80lm/W	3000K-5000K	>80	Aluminium	IP54
CURL L	6W/10W	80lm/W	3000K-5500K	>80	Aluminium	IP54

SLOT I


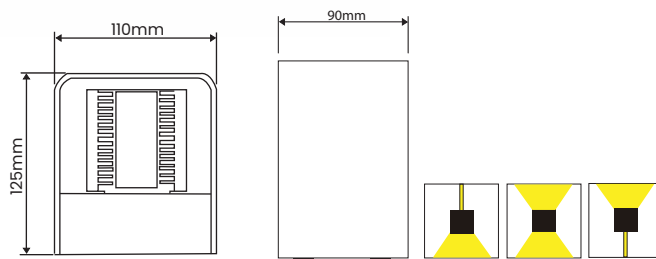


SLOT II


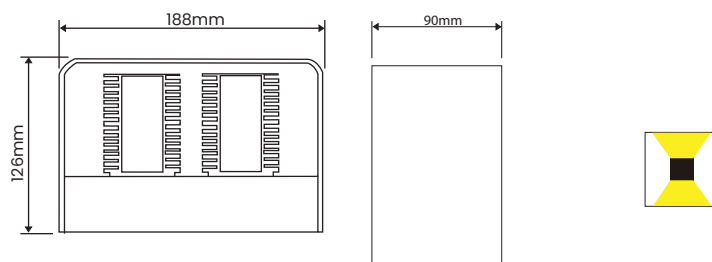


Code	Power	Lumen	CCT	CRI	Housing	Protection
SLOT I	6W/10W	90lm/W	3000K-5000K	>80	Aluminium	IP65
SLOT II	12W/18W	90lm/W	3000K-5500K	>80	Aluminium	IP65

TWISTER




TWISTER II

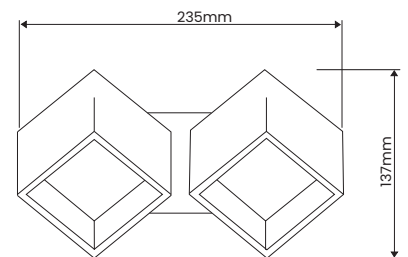


Code	Power	Lumen	CCT	CRI	Housing	Protection
TWISTER	6W/10W	80lm/W	3000K-5000K	>80	Aluminium	IP65
TWISTER I	12W/20W	80lm/W	3000K-5500K	>80	Aluminium	IP65

PILL I

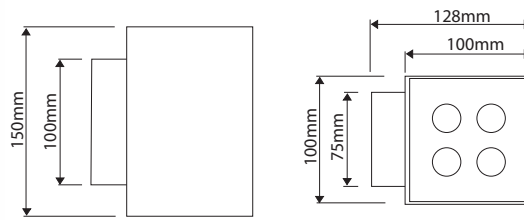


PILL II

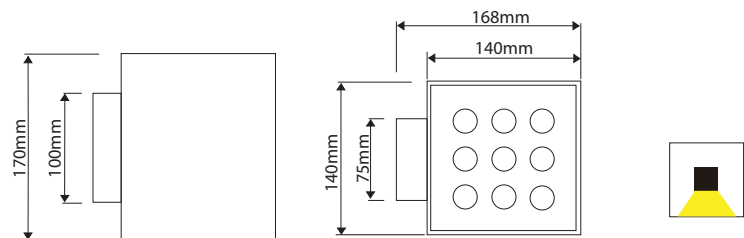


Code	Power	Lumen	CCT	CRI	Housing	Protection
PILL I	10W/20W	100lm/W	3000K-5000K	>80	Aluminium	IP65
PILL II	15W/30W	100lm/W	3000K-5500K	>80	Aluminium	IP65

CLIP


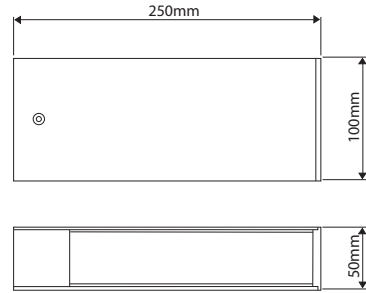


HOODIE


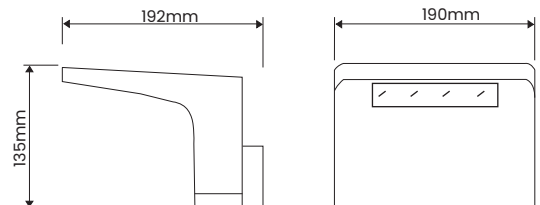


Code	Power	Lumen	CCT	CRI	Housing	Protection
CLIP	10W/20W	100lm/W	3000K-5000K	>80	Aluminium	IP65
HOODIE	15W/30W	100lm/W	3000K-5500K	>80	Aluminium	IP65

CURVY

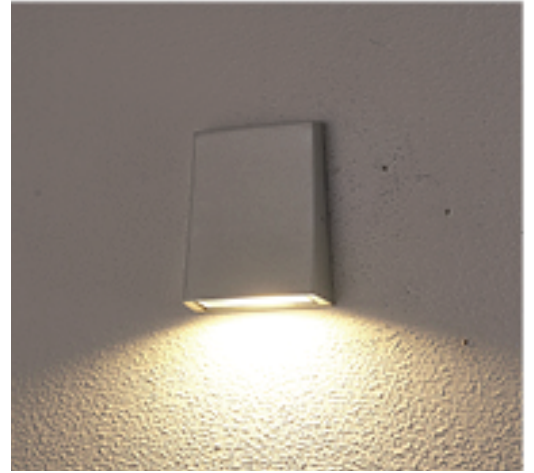


CURVY II

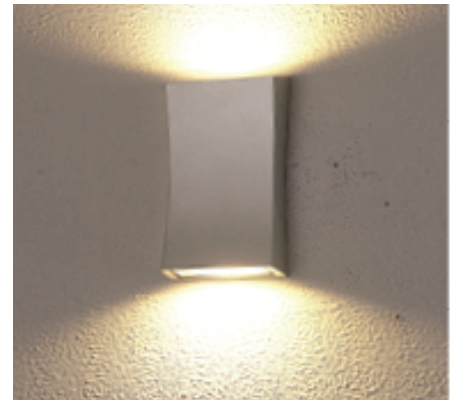


Code	Power	Lumen	CCT	CRI	Housing	Protection
CURVY	8W	90lm/W	3000K-5000K	>80	Die Cast Aluminium	IP65
CURVY II	16W	90lm/W	3000K-5500K	>80	Die Cast Aluminium	IP65

FLIP

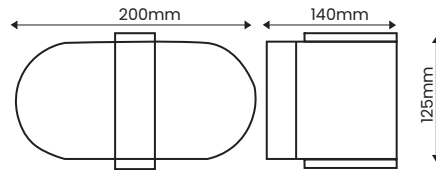


MOON

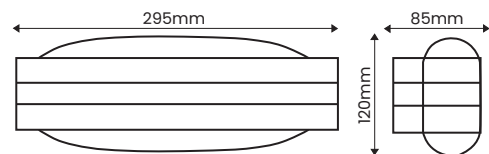


Code	Power	Lumen	CCT	CRI	Housing	Protection
FLIP	6W	80lm/W	3000K-5000K	>80	Die Cast Aluminium	IP65
MOON	6W	80lm/W	3000K-5500K	>80	Aluminium	IP54


HANG



MIRROR R




MIRROR S




Code	Power	Lumen	CCT	CRI	Housing	Protection
HANG	8W	80lm/W	3000K-5000K	>80	Die Cast Aluminium	IP65
MIRROR R	10W	80lm/W	3000K-5500K	>80	Die Cast Aluminium	IP65
MIRROR S	80W	80lm/W	3000K-5500K	>80	Die Cast Aluminium	IP65

OVAL




SEMI C




Code	Power	Lumen	CCT	CRI	Housing	Protection
OVAL	10W	80lm/W	3000K-5000K	>80	Die Cast Aluminium	IP65
SEMI C	6W	110lm/W	3000K-5500K	>80	Die Cast Aluminium	IP65

BEAK




RING




Code	Power	Lumen	CCT	CRI	Housing	Protection
BEAK	8W	80lm/W	3000K-5000K	>80	Die Cast Aluminium	IP65
RING	6W	110lm/W	3000K-5500K	>80	Die Cast Aluminium	IP65


HEAD R

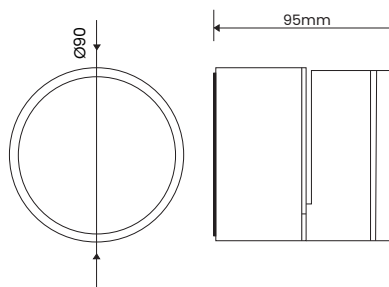


HEAD S

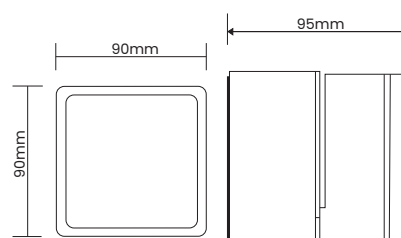



BAMBOO H





BAMBOO V




CAM H

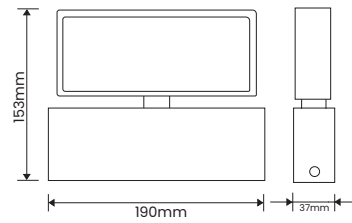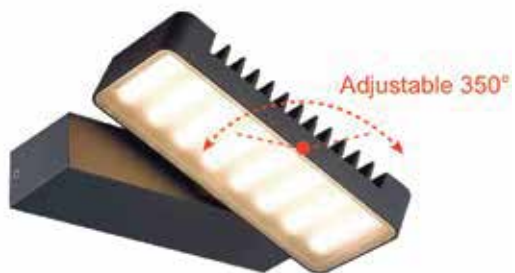


CAM V

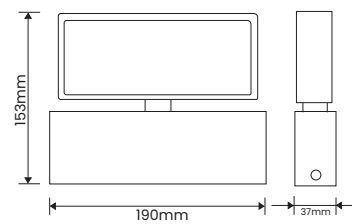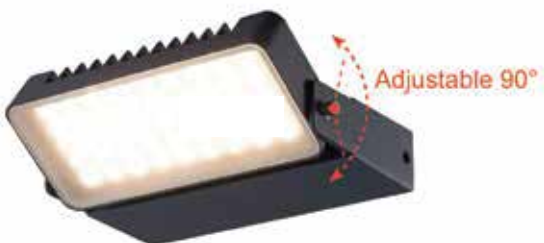


STICK I

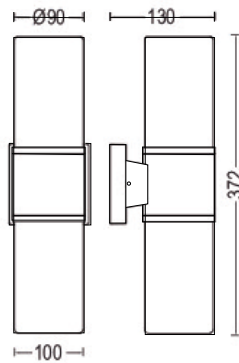


STICK II



DUO R




DUO S



SCUL SERIES



I




II



III



IV



V




SCUL SQUARE



I




II




III




SAMA



FRAME WALL LIGHT



CLOCK





Flood Light

Flood light

SHOE BOX SERIES



Features:

- Ultra compact LED floodlight dedicated to architectural illumination and accentuation.
- It is offered in monochromatic or dynamic version, with a selection of light distribution from narrow to extrusive.
- SHOEBOX is characterised by its extreme compactness and its perfect steady design.
- It integrates into its architectural environment with elegance and total discretion.
- A mounting bracket makes it possible to adjust and incline precisely the shoe flood light on site.
- It can be mounted on a wall, on the ground, on a ceiling or can be suspended.




Specifications:

- Nicely ADC 21 die- cast aluminium housing.
- IK10 strong protection, good optical function.
- Life span over 50,000 hours.
- Operating temperature: 20 - 50 and storage temperature: 40 - 60
- Electrostatic powder painting- grey/black or any RAL color on request.






Better Waterproof




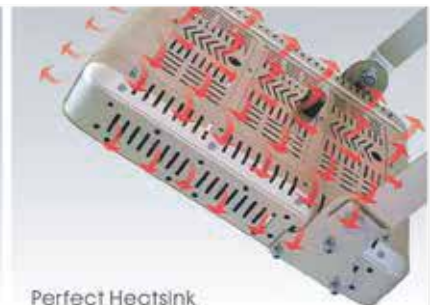


Perfect Heatsink

SHOE HL




SHOE IL

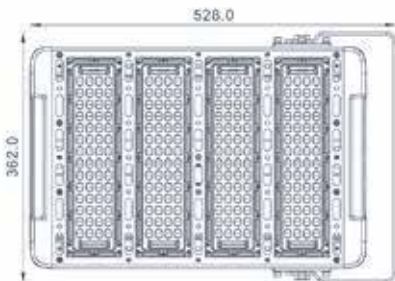


Code	Power	Lumen	CCT	CRI	Beam Angle
SHOE HL	150W	130lm/W	3000K/4000K/5700K	>80	30°*70° / 60°* 100°/120°
SHOE IL	200W	130lm/W	3000K/4000K/5700K	>80	30°*70° / 60°* 100°/120°

SHOE FL

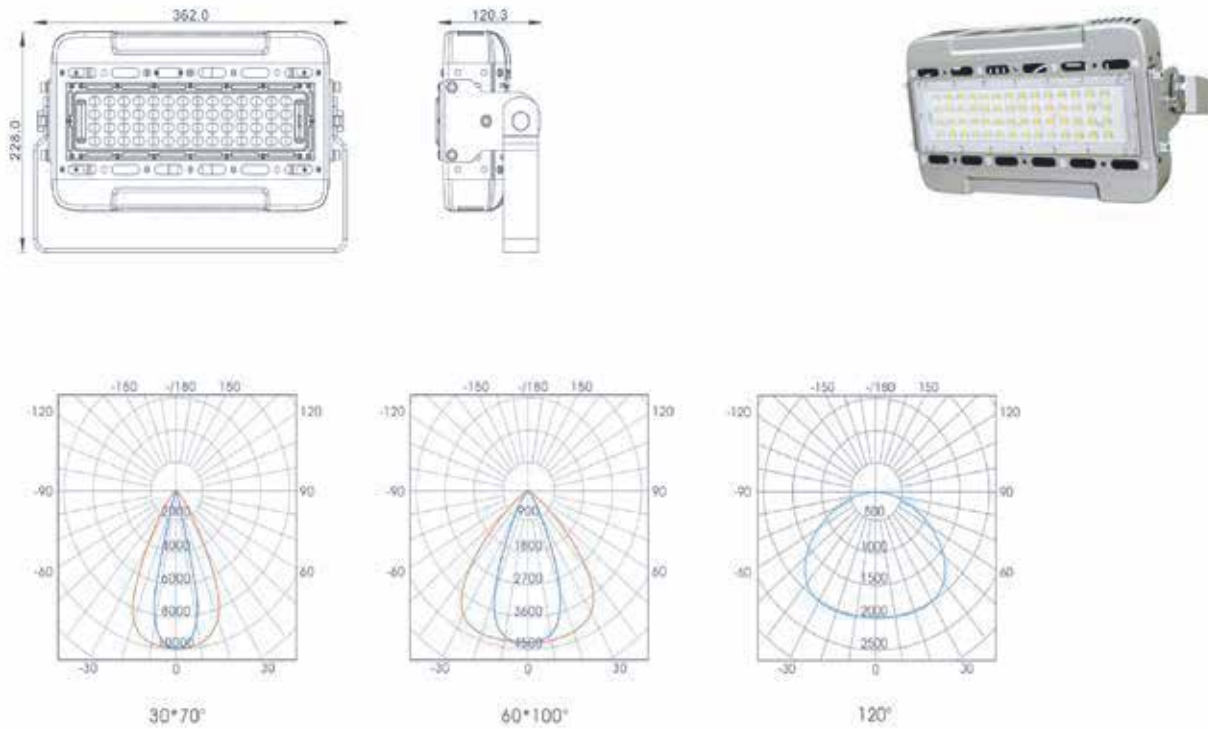


SHOE GL

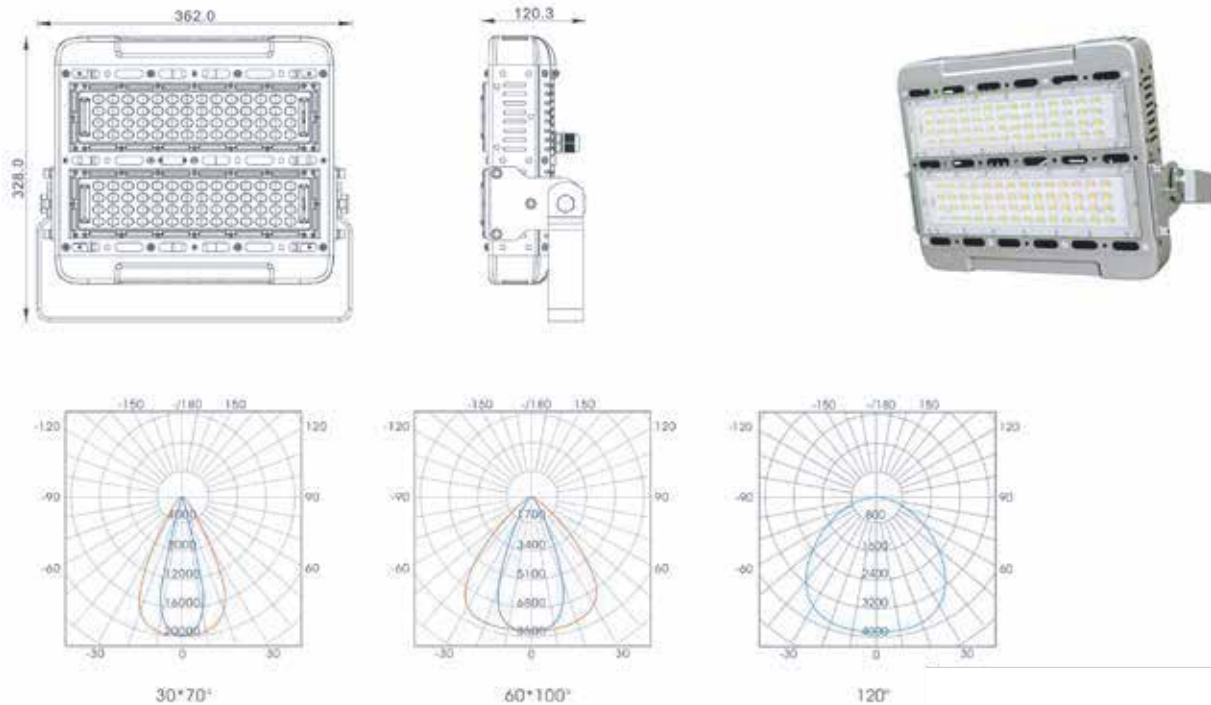

Code	Power	Lumen	CCT	CRI	Beam Angle
SHOE FL	50W	120lm/W	3000K/4000K/5700K	>80	30°*70°/ 60°* 100°/120°
SHOE GL	100W	120lm/W	3000K/4000K/5700K	>80	30°*70°/ 60°* 100°/120°

SHOE KL

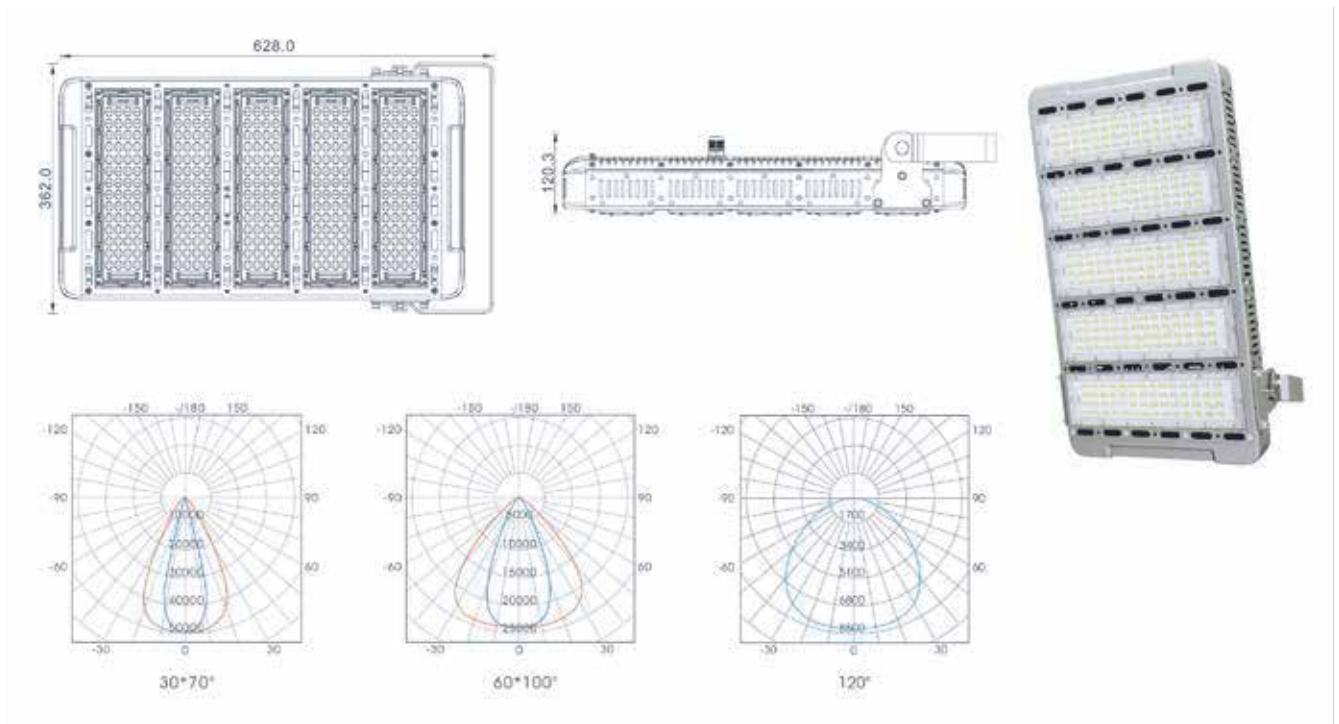

Code	Power	Lumen	CCT	CRI	Beam Angle
SHOE KL	240W	130lm/W	3000K/4000K/5700K	>80	30°*70°/ 60°* 100°/120°

Flood light

CUBE SERIES




Features:

- Versatile spotlight for accent and architectural lighting.
- Designed to enhance architectural details and to underline the landscape elements, the CUBE series is a handy tool for careful lighting design.
- The CUBE series is characterised by its extreme compactness and its perfect design.
- The floodlight combines multi-die technology and special lenses for a perfect color mix.
- The beam can be easily adapted on site, in addition, the associated bracket offered with a degree angle indication system which allows a precise adjustment.





Specifications:




- Nicely ADC 21 die- cast aluminium housing.
- IK10 strong protection, good optical function.
- Life span over 50,000 hours.
- Operating temperature: 20 - 50 and storage temperature: 40 - 60
- Electrostatic powder painting- grey/black or any RAL color on request.

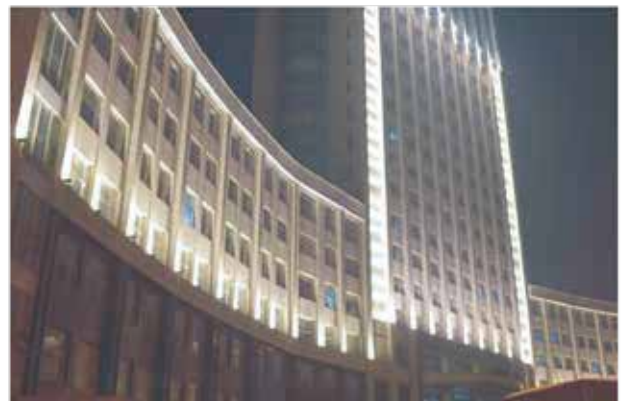

CUBE S


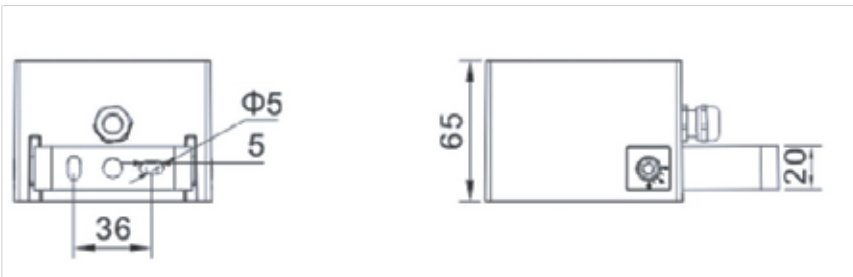


CUBE S HOOD


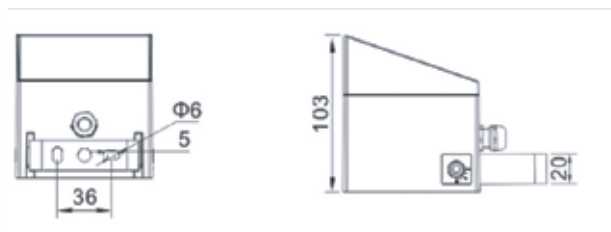
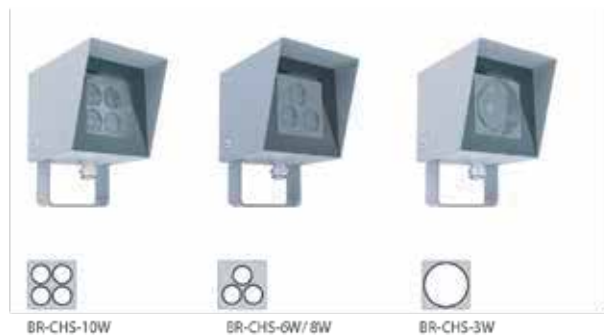


Code	Power	Lumen	CCT	CRI	Beam Angle
CUBE S	3W-10W	217lm-753lm	3000K/4000K/5700K	>80	3.5°/5°
CUBE S HOOD	3W-10W	241lm-762lm	3000K/4000K/5700K	>80	3.5°/5°

CUBE M



CUBE M HOOD



Code	Power	Lumen	CCT	CRI	Beam Angle
CUBE M	12W-36W	1219lm-3351lm	3000K/4000K/5700K	>80	7°/15°/25°/40°/60°
CUBE M HOOD	12W-36W	1242lm-3379lm	3000K/4000K/5700K	>80	7°/15°/25°/40°/60°

Flood light



3.5°




5°




7°



15°



25°



40°



60°



Flood light

SNOW




Features:

- Ultra compact LED floodlight dedicated to architectural illumination and light accentuation.
- The SNOW SERIES floodlight is characterized by its extreme compactness and its perfect design.
- Ideal choice for outdoor building and landscape lighting.
- The SNOW SERIES symbolises an opening towards new paths in aesthetics while providing high photometric performance.
- A mounting bracket makes it possible to adjust and incline precisely floodlight on site.
- The SNOW SERIES range of luminaires combines 3 models- wall mounted, pole mounted and spike shrub light.





Specifications:

- Nicely ADC 21 die- cast aluminium housing.
- IK10 strong protection, good optical function.
- Life span over 50,000 hours.
- Operating temperature: 20 - 50 and storage temperature: 40 - 60
- Electrostatic powder painting- grey/black or any RAL color on request.

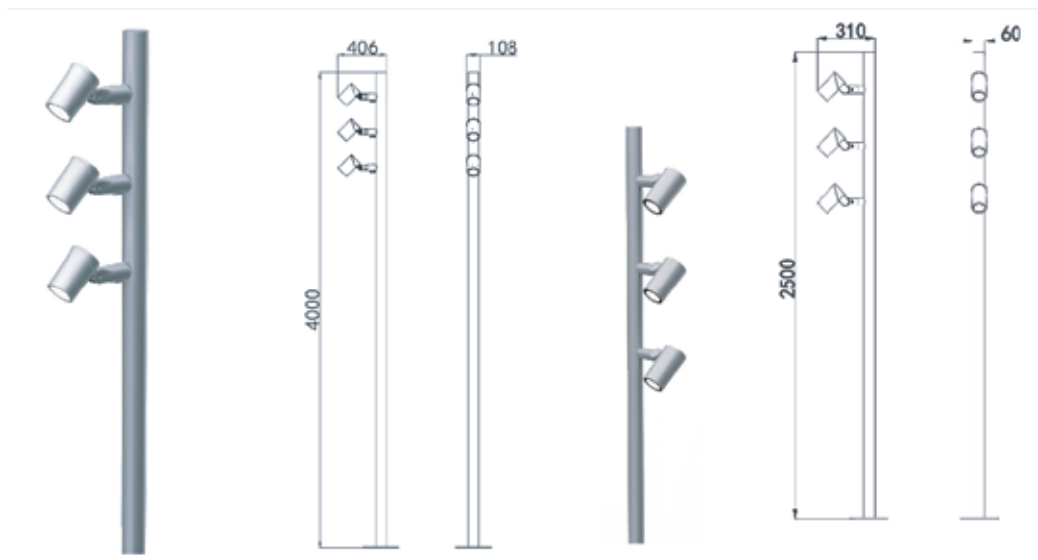

SNOW S

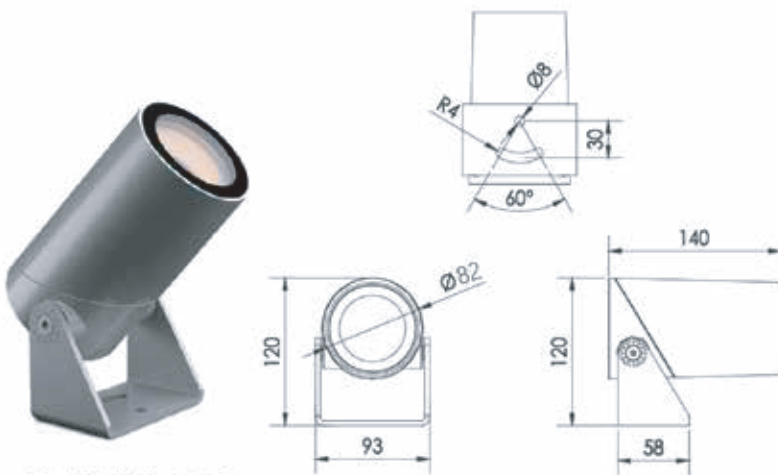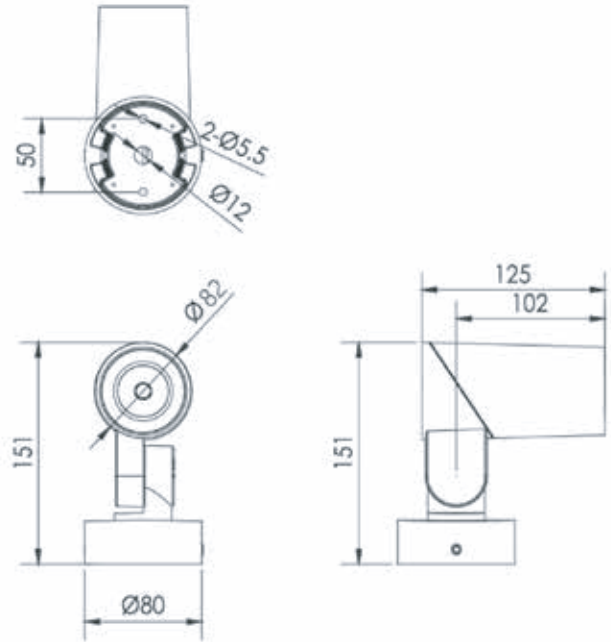



*Pedestal Mounted



*Spike Shrub Light

Code	Power	Lumen	CCT	CRI
SNOW S	8W-15W	800lm-1500lm	3000K/4000K/5700K	>80


SNOW M

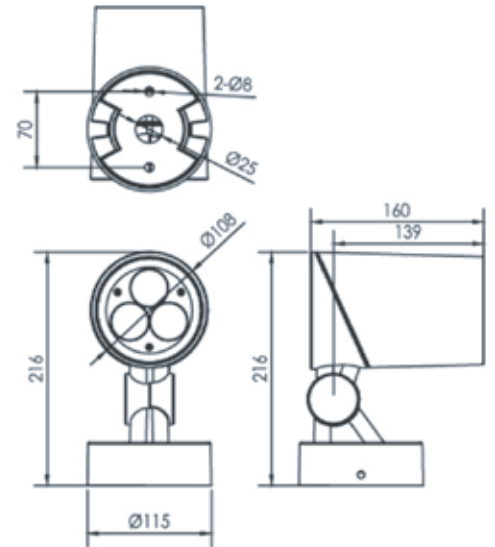


*Wall Mounted



*Pedestal Mounted

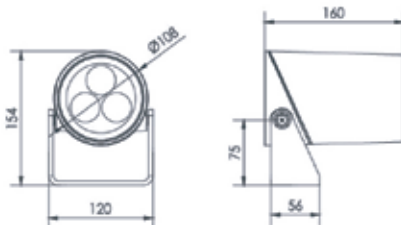

*Spike Shrub Light



Code	Power	Lumen	CCT	CRI
SNOW M	20W-35W	2000lm-3500lm	3000K/4000K/5700K	>80

Flood light



Flood light

PROJECTOR



Features:


- Ultra compact LED floodlight dedicated to architectural illumination and light accentuation.
- Ideal choice for outdoor building and landscape lighting.
- Designed to enhance architectural details and to underline the landscape elements, the PROJECTOR is a handy tool for careful lighting design.
- It is offered in a static monochromatic or dynamic version, with the selection of light distributions from narrow to extrusive.
- The PROJECTOR series range of luminaires combines 4 models-wall mounted, pedestal, spike shrub light and pole mounted which is available in 8 different sizes.




Specifications:

- Nicely ADC 21 die- cast aluminium housing.
- IK10 strong protection, good optical function.
- Life span over 50,000 hours.
- Operating temperature: 20 - 50 and storage temperature: 40 - 60
- Electrostatic powder painting- grey/black or any RAL color on request.


PROJECTOR 10

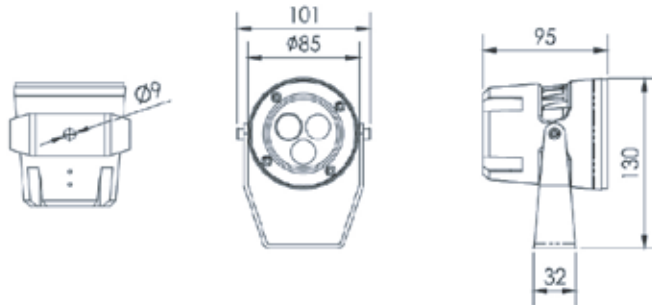

*Pedestal/wall/ceiling/pole mounted

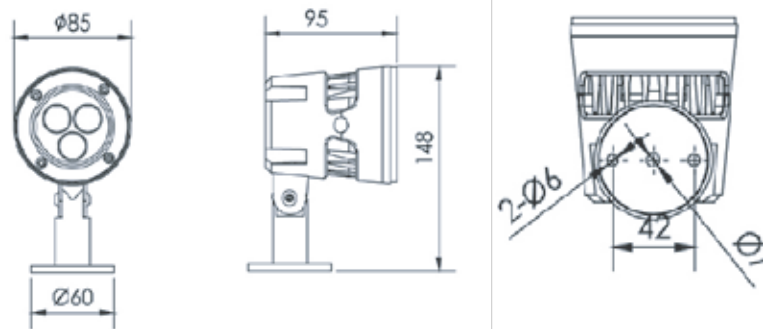

*Pole mounted


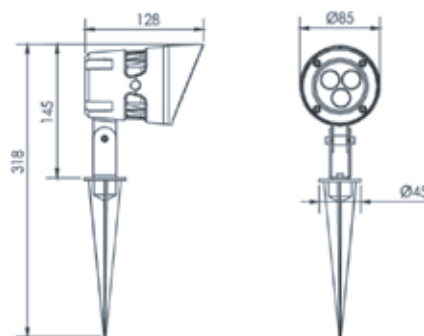


*Spike shrub light




Code	Power	Lumen	CCT	CRI
PROJECTOR 10	10W/12W	100lm/W	3000K/4000K/5000K	>80

*Lumens calculated on 3000k



PROJECTOR 20





*Pedestal/wall mounted



*Pedestal/wall mounted



*Pedestal/wall/ceiling mounted




*Pole mounted

*Pedestal/wall/ceiling mounted






*Spike Shrub Light

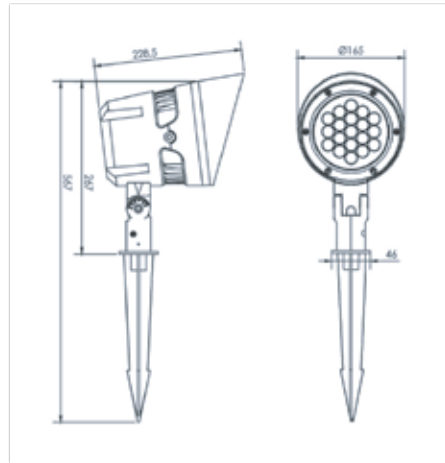




Code	Power	Lumen	CCT	CRI
PROJECTOR 20	20W	100lm/W	3000K/4000K/5000K	>80

*Lumens calculated on 3000k



PROJECTOR 45





*Pedestal/wall mounted



*Pedestal/wall mounted



*Pedestal/wall/ceiling mounted




*Wall mounted

*Pedestal/wall/ceiling mounted



*Spike Shrub light

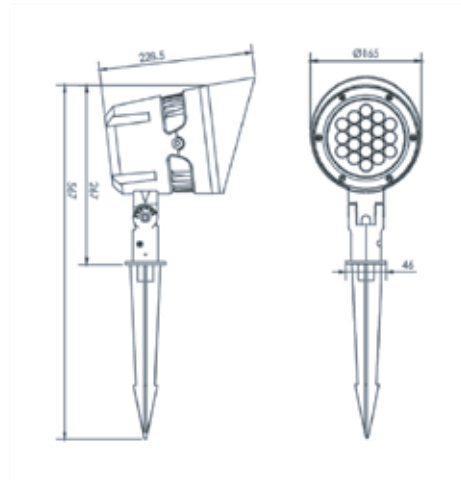



Code	Power	Lumen	CCT	CRI
PROJECTOR 45	30W-45W	100lm/W	3000K/4000K/5000K	>80

*Lumens calculated on 3000k



PROJECTOR 105






*Pedestal/wall mounted

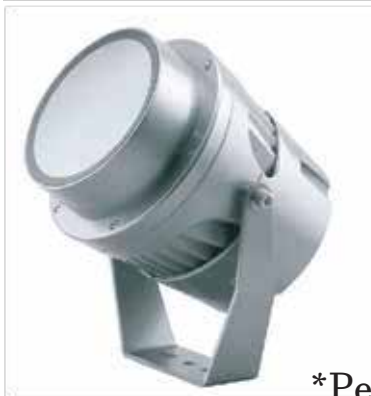




*Pedestal/wall mounted




*Hood

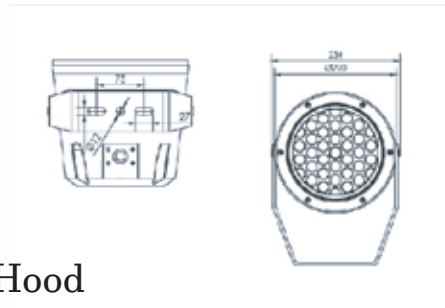

Flood light

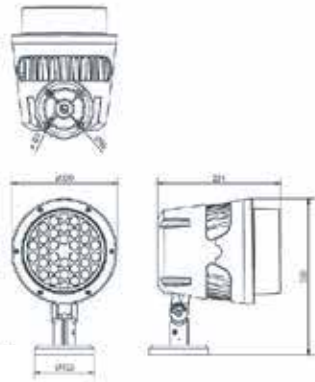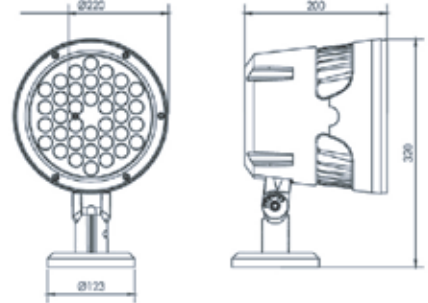

*Pedestal/wall mounted



*Wall mounted

Code	Power	Lumen	CCT	CRI
PROJECTOR 105	60W/80W/100W	100lm/W	3000K/4000K/5000K	>80

*Lumens calculated on 3000k





Neon Series

Make Reliable Products Only



Class



One Bin Only



IP68



LM-80



CE



UL



RoHS



UV
Protected



Corrosion
Resistant



Dirt
Resistant



Saltwater
Resistant



IK08



warranty



BIS



RELIABILITY


Material

A reliable product is made of superior material. We adopt first-class imported calendering copper for FPC, the thickness of copper reached to 4OZ, which is featured by its good conductivity and folding resistance. LED for standard orders are used from renowned top package manufactures, which adopt Epistar/ Nichia chip for all white colors. The package and glue are cater-designed for outdoor products.

The material of housing and body for LED neon are made by PVC/ SILICON OPTIONAL which is special designed for LED neon strip used in outdoor harsh environment.

The PVC / SILICON we used is UV resistant, solvents resistant, flame resistant, saltwater resistant, and dirt resistant.

OPTIONAL WITH PVC AND SILICON

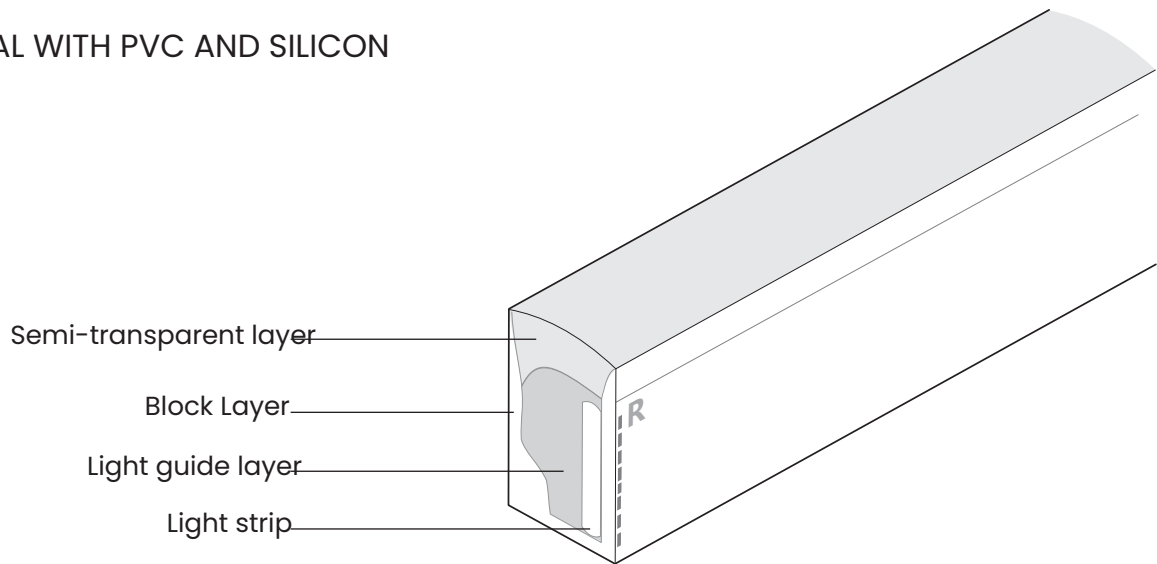

4OZ FPC adopted



Optimized heat transfer to housing to ensure life span and color consistency
Minimize the voltage drop to ensure same brightness from 0.1m to 20 meters
Reliable bending performance

LED



Chips for standard products used from Epistar and packaged by renowned top manufactures. CREE, Nichia are optional for Mono color series. We keep One bin Only by requesting from LED supplier and using Kingdee ERP system for management. Furthermore, CRI95, R9 96, 3 Step MacAdam LED are optional.

Housing material



The PVC/SILICON used by us is superior quality and catered the best material for LED neon strip usage, which is UV stable, corrosion resistant solvents resistant, fire resistant and saltwater resistant

Connectors



Mold injection

Features:

1. IP68 waterproof rating, suitable for extreme harsh applications like pool, salt, and seaside.
2. High reliability, pre-installed in factory with various quality tests before dispatch.
3. Cost-saving for installation, contractors do not need to spend labor and time on connector assembling.
4. Seamless joint by side and bottom cable entry.

DIY connectors

Features:

1. Flexible customization, can be cut and re-connected by end-user.
2. IP67 waterproof rating for normal outdoor environment.
3. More suitable for retail and end-user market.

Waterproof Design for cable

This stainless steel waterproof device is a very important waterproof accessory for outdoor bare wire products. The theory is by breaking the copper wire, re-welding with interrupter, then sealing the welding joint by mold-injecting high density and high viscosity material, so that the LED neon strip is completely isolated from the external wiring, realizing that the wiring cannot be penetrated with any air or moisture, in spite of the pressure and temperature aroused from LED neon strip.



Male & Female Connector

The male/female waterproof connector is made by two layers of injection molding with high viscosity TPU and high density nylon material inside.

The quality control is conducted by blow test with air in water and the result should be without any bubbles. After locked by its stainless steel locking ring, it has outstanding reliability and waterproof performance with IP68 rating.






SEAMLESS JOINT


Topview

Vertical Bending

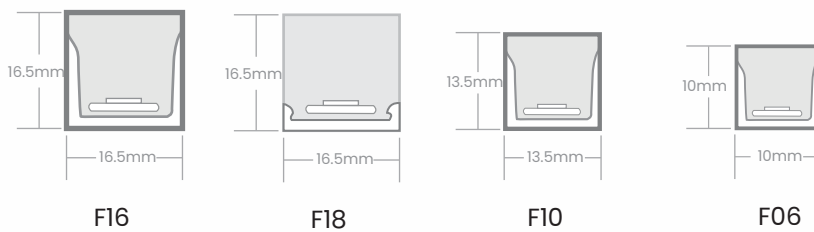


Sideview

Horizontal Bending

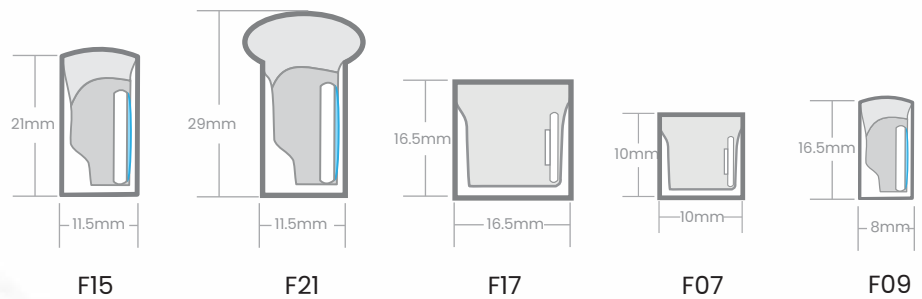

Customization



Available to customize the strip length



Available to customize the CRI



Available to customize the wire length



Available to customize different connectors



Available to customize LED color temperature



Products List



Mono



Tunable White



Multi RGB(W)



Pixel Chasing

F15-24V-5050-70-DMX-RGB

Color

Working Mode

LED Qty

LED Type

Working Volts

Shape Model

	Voltage/M	Power/M	LED Qty/m	LED Type	Color	Working Mode	Max Length/ One End	Pixel/M	F21	F15/SF15	F16/SF16		F17	F10	F09	
Mono	12V	5W	72	3528	Mono	CV	7m	n/a	●	●						
	24V	5W	72	3528	Mono	CV	15m		●	●						
	24V	9W	120	3528	Mono	CV	10m				●					
	24V	7.2W	60	5050	R, A, O	CV	15m		●	●						
	24V	12W	60	5050	Mono	CV	10m		●	●						
	24V	15W	72	5050	Mono	CV	8m		●	●		●				
	36V	12W	60	5050	Mono	CV	15m		●	●						
	24V	10W	72	2835	Mono	CV (IC)	15m		●	●						
	24V	10W	120	2835	Mono	CV (IC)	15m				●				●	
	24V	10W	144	2835	Mono	CV	10m					●		●		
	24V	10W	120	2835	Mono	CV	5m					●	●			
	24V	5W	70	2835	Mono	CV	10m								●	
	24V	10W	144	3528	Mono	CV	10m				●					
	24V	10W	120	2835	Mono	CV	10m								●	
	48V	5W	84	2835	Mono	CV(IC)	50m					●		●	●	
	48V	10W	60	5050	Mono	CV	20m		●	●						
Tunable White	24V	15W	120	2835	DW	CV	10m		●	●	●	●				
PWM RGB(W)	24V	12W	60	5050	RGB	CV	10m		●	●						
	24V	13W	72	5050	RGB	CV	10m		●	●	●					
	48V	10W	60	5050	RGB	CV	20m		●	●						
	24V	17W	60	5050	RGBW	CV	8m		●	●						
	12V	17W	60	5050	RGBW	CV	5m		●	●		●				
	24V	17W	72	5050	RGBW	CV	8m		●	●	●	●				
	24V	16W	70	5050	RGB	SPI	8m	10	●	●	●					
SPI	24V	15W	56	5050	RGBW	SPI	8m	8	●	●		●				
	24V	16W	70	5050	3000K	SPI	8m	10	●	●	●	●				
	24V	10W	70	5050	DW	SPI	10m	10	●	●	●	●				
	24V	12W	56	5050	RGB	DMX	7m	8	●	●						
DMX	24V	15W	70	5050	RGB	DMX (RS485)	8m	10	●	●	●	●				
	24V	18W	70	5050	RGBW	DMX (RS485)	8m	10	●	●	●	●				
	24V	15W	70	5050	3000K	DMX (RS485)	8m	10	●	●	●	●				
	24V	10W	70	5050	DW	DMX (RS485)	10m	10	●	●	●	●				


Mono includes: 2200K, 2500K, 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K, Red, Green, Blue, Amber, Lemon Yellow, Orange, Pink

DW: Dual White (Tunable White)

CV: Constant Voltage, IC: Built in Constant Current IC



Marriott Hotel, Dubai , P15 Mono

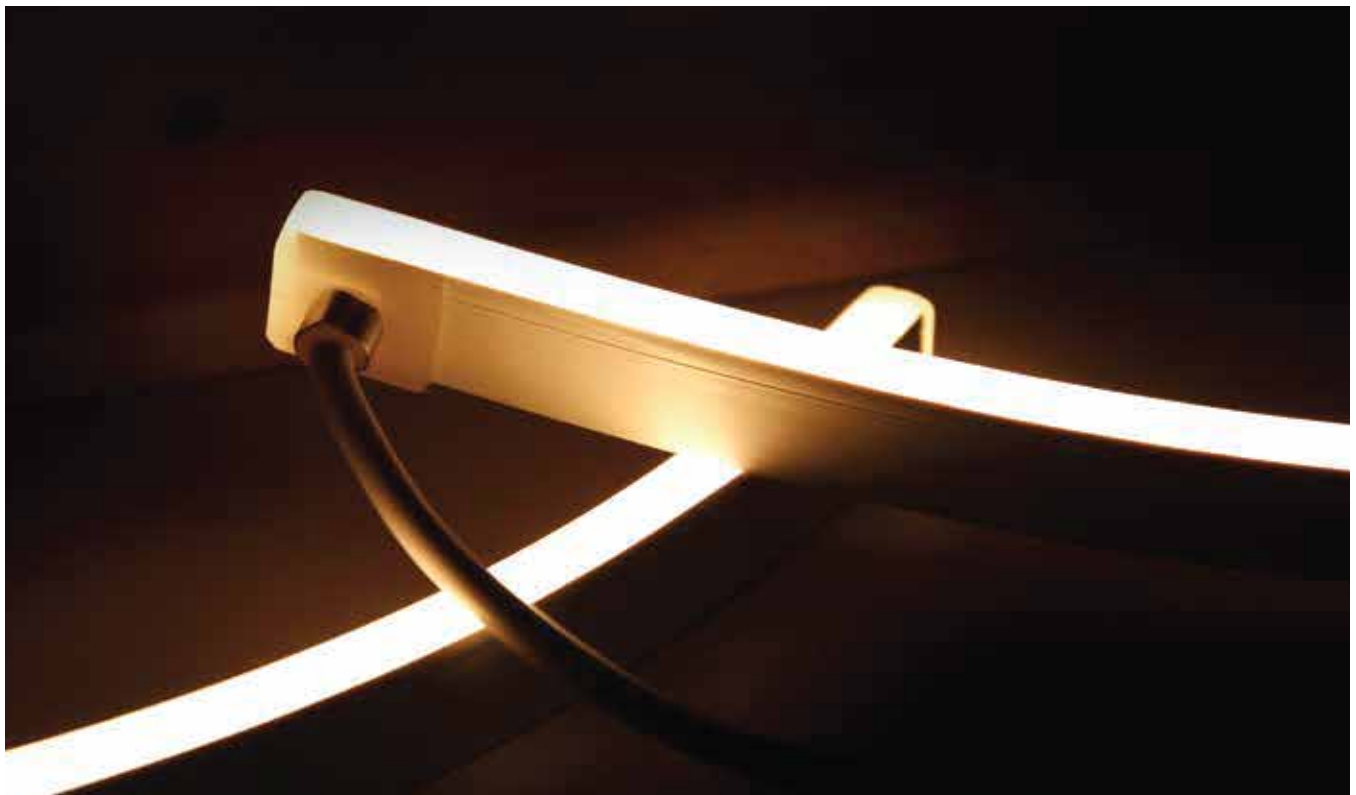

TAPE F15 series



Material:
PVC



Waterproof rating
IP68



Bending Direction:
Side



Beam Angle
120°





Min. Bending
80mm



Operating Ambient Temp.
-20 C to +50 C



Dimmable:
DALI, 0-10V, DMX, Triac



F15 Mono color

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	TAPE F15-24V-5050-72	Available Color		
Input Voltage:	24V DC	2200K-450lm	Green	240lm
Power/m:	15W	2500K-450lm	Blue	60lm
Working Mode:	PWM CV	2700K-450lm	Lemon Yellow	400lm
LED Type:	SMD5050	3000K-450lm	Pink	195lm
LED Qty / meter:	72pcs	3500K-480lm		
Cutting Unit:	6LEDs	4000K-480lm		
Cutting Length:	8cm	5000K-500lm		
Max Length Single Roll:	8mtr.	5700K-500lm		
		6500K-500lm		



Model:	TAPE F15-24V-5050-60	Available Color		
Input Voltage:	24V DC	2200K-360lm	Green	190lm
Power/m:	12W	2500K-360lm	Blue	48lm
Working Mode:	PWM CV	2700K-360lm	Lemon Yellow	300lm
LED Type:	SMD5050	3000K-360lm	Pink	150lm
LED Qty / meter:	60pcs	3500K-384lm		
Cutting Unit:	6LEDs	4000K-384lm		
Cutting Length:	10cm	5000K-400lm		
Max Length Single Roll:	10mtr.	5700K-400lm		
		6500K-400lm		

F15 Mono color

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	TAPE F15-24V-5050-60-U10	Available Color	
Input Voltage:	24V DC	● Red	110lm
Power/m:	7.2W	● Amber	110lm
Working Mode:	PWM CV	● Orange	90lm
LED Type:	SMD5050		
LED Qty / meter:	60pcs		
Cutting Unit:	10LEDs		
Cutting Length:	16cm		
Max Length Single Roll:	15mtr.		



Model:	TAPE F15-36V-5050-60	Available Color		
Input Voltage:	36V DC	● 2200K- 360lm	● Green	190lm
Power/m:	12W	● 2500K- 360lm	● Blue	48lm
Working Mode:	PWM CV	● 2700K- 360lm	● Lemon Yellow	300lm
LED Type:	SMD5050	● 3000K- 360lm	● Pink	150lm
LED Qty / meter:	60pcs	● 3500K- 384lm		
Cutting Unit:	10LEDs	● 4000K- 384lm		
Cutting Length:	16cm	● 5000K- 400lm		
Max Length Single Roll:	15mtr.	● 5700K- 400lm		
		● 6500K- 400lm		



Model:	TAPE F15-24V-3528-72	Available Color		
Input Voltage:	24V DC	● 2200K- 150lm	● Green	80lm
Power/m:	5W	● 2500K- 150lm	● Blue	20lm
Working Mode:	PWM CV	● 2700K- 150lm	● Pink	65lm
LED Type:	SMD3528	● 3000K- 150lm	● Red	70lm
LED Qty / meter:	72pcs	● 3500K- 160lm	● Amber	70lm
Cutting Unit:	12LEDs	● 4000K- 160lm	● Orange	60lm
Cutting Length:	16cm	● 5000K- 170lm		
Max Length Single Feed:	15mtr.	● 5700K- 170lm		
		● 6500K- 170lm		



Model:	TAPE F15-12V-3528-72	Available Color		
Input Voltage:	12V DC	● 2200K- 150lm	● Green	80lm
Power/m:	5W	● 2500K- 150lm	● Blue	20lm
Working Mode:	PWM CV	● 2700K- 150lm	● Pink	65lm
LED Type:	SMD3528	● 3000K- 150lm	● Red	70lm
LED Qty / meter:	72pcs	● 3500K- 160lm	● Amber	70lm
Cutting Unit:	6LEDs	● 4000K- 160lm	● Orange	60lm
Cutting Length:	8cm	● 5000K- 170lm		
Max Length Single Feed:	10mtr.	● 5700K- 170lm		
		● 6500K- 170lm		

F15 Multic RGB

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	TAPE F15-48V-5050-60-RGB	Available Color
Input Voltage:	48V DC	RGB
Power/m:	10W	
Working Mode:	PWM CV	
LED Type:	SMD5050	
LED Qty /m:	60pcs	
Cutting Unit:	15LEDs	
Cutting Length:	25cm	
Max Length Single Feed:	20m	



Model:	TAPE F15-24V-5050-72-RGB	Available Color
Input Voltage:	24V DC	RGB
Power/m:	13W	
Working Mode:	PWM CV	
LED Type:	SMD5050	
LED Qty /m:	72pcs	
Cutting Unit:	6LEDs	
Cutting Length:	8.33cm	
Max Length Single Feed:	10m	

F15 Multic RGBW



Model:	TAPE F15-24V-5050-60-RGBW	Available Color
Input Voltage:	24V DC	RGBW (2200K/3000K/4000K)
Power/m:	17W	
Working Mode:	PWM CV	
LED Type:	SMD5050	
LED Qty /m:	60pcs	
Cutting Unit:	6LEDs	
Cutting Length:	10cm	
Max Length Single Feed:	8m	



Model:	TAPE F15-24V-5050-72-RGBW	Available Color
Input Voltage:	24V DC	RGBW (2200K/3000K/4000K)
Power/m:	17W	
Working Mode:	PWM CV	
LED Type:	SMD5050	
LED Qty /m:	72pcs	
Cutting Unit:	6LEDs	
Cutting Length:	8.33 cm	
Max Length Single Feed:	8m	



Model:	TAPE F15-12V-5050-60-RGBW	Available Color
Input Voltage:	12V DC	RGBW (2200K/3000K/4000K)
Power/m:	17W	
Working Mode:	PWM CV	
LED Type:	SMD5050	
LED Qty /m:	60pcs	
Cutting Unit:	3LEDs	
Cutting Length:	5 cm	
Max Length Single Feed:	5m	







F21 series



Material:
PVC



Waterproof rating
IP68



Bending Direction:
Side



Beam Angle
270°





Min. Bending
80mm



Ambient Temp.
-25°C-55°C



Dimmable:
DALI, 0-10V, DMX, Triac



F21 Mono color

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	TAPE F21-24V-5050-72	Available Color			
Input Voltage:	24V DC	2200K- 300lm	Green	200lm	
Power/m:	15W	2500K- 300lm	Blue	40lm	
Working Mode:	PWM CV	2700K- 300lm	Lemon Yellow	300lm	
LED Type:	SMD5050	3000K- 300lm	Pink	160lm	
LED Qty / meter:	72pcs	3500K- 340lm			
Cutting Unit:	6LEDs	4000K- 340lm			
Cutting Length:	8.33cm	5000K- 350lm			
Max Length Single Feed:	8m	5700K- 350lm			
		6500K- 350lm			



Model:	TAPE F21-24V-5050-60	Available Color			
Input Voltage:	24V DC	2200K- 250lm	Green	180lm	
Power/m:	12W	2500K- 250lm	Blue	30lm	
Working Mode:	PWM CV	2700K- 250lm	Lemon Yellow	250lm	
LED Type:	SMD5050	3000K- 250lm	Pink	130lm	
LED Qty / meter:	60pcs	3500K- 300lm			
Cutting Unit:	6LEDs	4000K- 300lm			
Cutting Length:	10cm	5000K- 320lm			
Max Length Single Feed:	10m	5700K- 320lm			
		6500K- 320lm			

F21 Mono color

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	TAPE F21-24V-5050-60-U	Available Color		
Input Voltage:	24V DC	2200K-150lm	Red	75lm
Power/m:	7W	2700K-150lm	Amber	75lm
Working Mode:	PWM CV	3000K-150lm	Orange	50lm
LED Type:	SMD5050	3500K-170lm		
LED Qty / meter:	60pcs	4000K-170lm		
Cutting Unit:	10LEDs	5000K-180lm		
Cutting Length:	16.67cm	5700K-180lm		
Max Length Single Feed:	15m	6500K-180lm		



Model:	TAPE F21-36V-5050-60	Available Color		
Input Voltage:	36V DC	2200K-250lm	Green	180lm
Power/m:	12W	2500K-250lm	Blue	30lm
Working Mode:	PWM CV	2700K-250lm	Lemon Yellow	250lm
LED Type:	SMD5050	3000K-250lm	Pink	130lm
LED Qty / meter:	60pcs	3500K-300lm		
Cutting Unit:	10LEDs	4000K-300lm		
Cutting Length:	16.67cm	5000K-320lm		
Max Length Single Feed:	15m	5700K-320lm		
		6500K-320lm		



Model:	TAPE F21-24V-3528-72	Available Color		
Input Voltage:	24V DC	2200K-110lm	Green	70lm
Power/m:	5W	2500K-110lm	Blue	13lm
Working Mode:	PWM CV	2700K-110lm	Pink	55lm
LED Type:	SMD3528	3000K-110lm	Red	40lm
LED Qty / meter:	72pcs	3500K-120lm	Amber	40lm
Cutting Unit:	12LEDs	4000K-120lm	Orange	32lm
Cutting Length:	16.67cm	5000K-130lm		
Max Length Single Feed:	15m	5700K-130lm		
		6500K-130lm		



Model:	TAPE F21-12V-3528-72	Available Color		
Input Voltage:	12V DC	2200K-110lm	Green	70lm
Power/m:	5W	2500K-110lm	Blue	13lm
Working Mode:	PWM CV	2700K-110lm	Pink	55lm
LED Type:	SMD3528	3000K-110lm	Red	40lm
LED Qty / meter:	72pcs	3500K-120lm	Amber	40lm
Cutting Unit:	6LEDs	4000K-120lm	Orange	32lm
Cutting Length:	8.33cm	5000K-130lm		
Max Length Single Feed:	7m	5700K-130lm		
		6500K-130lm		

F21 Mono color

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	TAPE F21-24V-2835-72	Available Color		
Input Voltage:	24V DC	2200K- 210lm	Green	150lm
Power/m:	10W	2500K- 210lm	Blue	25lm
Working Mode:	PWM CV (CC IC)	2700K- 210lm	Lemon Yellow	185lm
LED Type:	SMD2835	3000K- 210lm	Pink	110lm
LED Qty / meter:	72pcs	3500K- 250lm		
Cutting Unit:	6LEDs	4000K- 250lm		
Cutting Length:	8.33cm	5000K- 270lm		
Max Length Single Feed:	49.21'/15m	5700K- 270lm		
		6500K- 270lm		



Model:	TAPE F21-48V-5050-60	Available Color		
Input Voltage:	48V DC	2200K- 250lm	Green	180lm
Power/m:	10W	2500K- 250lm	Blue	30lm
Working Mode:	PWM CV	2700K- 250lm	Lemon Yellow	250lm
LED Type:	SMD5050	3000K- 250lm	Pink	130lm
LED Qty / meter:	60pcs	3500K- 300lm		
Cutting Unit:	15LEDs	4000K- 300lm		
Cutting Length:	25cm	5000K- 320lm		
Max Length Single Feed:	20m	5700K- 320lm		
		6500K- 320lm		

F21 Tunable white

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	TAPE F21-24V-2835-120-DW	Available Color		
Input Voltage:	24V DC	2200K+5700K		
Power/m:	15W	2700K+5700K		
Working Mode:	PWM CV	3000K+5700K		
LED Type:	SMD2835			
LED Qty / meter:	120pcs			
Cutting Unit:	12LEDs			
Cutting Length:	10cm			
Max Length Single Feed:	10m			

F21 Multic RGB

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	TAPE F21-24V-5050-60-RGB	Available Color		
Input Voltage:	24V DC	RGB		
Power/m:	12W			
Working Mode:	PWM CV			
LED Type:	SMD5050			
LED Qty / meter:	60pcs			
Cutting Unit:	6LEDs			
Cutting Length:	10cm			
Max Length Single Feed:	10m			

F21 Multic RGB

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	TAPE F21-48V-5050-60-RGB	Available Color
Input Voltage:	48V DC	RGB
Power/m:	10W	
Working Mode:	PWM CV	
LED Type:	SMD5050	
LED Qty / meter:	60pcs	
Cutting Unit:	15LEDs	
Cutting Length:	25cm	
Max Length Single Feed:	20m	



Model:	TAPE F21-24V-5050-72-RGB	Available Color
Input Voltage:	24V DC	RGB
Power/m:	13W	
Working Mode:	PWM CV	
LED Type:	SMD5050	
LED Qty / meter:	72pcs	
Cutting Unit:	6LEDs	
Cutting Length:	8.33cm	
Max Length Single Feed:	10m	

F21 Multic RGBW



Model:	TAPE F21-24V-5050-60-RGBW	Available Color
Input Voltage:	24V DC	RGBW (2200K/3000K/4000K)
Power/m:	17W	
Working Mode:	PWM CV	
LED Type:	SMD5050	
LED Qty / meter:	60pcs	
Min. Cutting Unit:	6LEDs	
Min. Cutting Length:	10cm	
Max Length Single Feed:	8m	



Model:	TAPE F21-24V-5050-72-RGBW	Available Color
Input Voltage:	24V DC	RGBW (2200K/3000K/4000K)
Power/m:	17W	
Working Mode:	PWM CV	
LED Type:	SMD5050	
LED Qty / meter:	72pcs	
Min. Cutting Unit:	6LEDs	
Min. Cutting Length:	8.33cm	
Max Length Single Feed:	8m	



Model:	TAPE F21-12V-5050-60-RGBW	Available Color
Input Voltage:	12V DC	RGBW (2200K/3000K/4000K)
Power/m:	17W	
Working Mode:	PWM CV	
LED Type:	SMD5050	
LED Qty / meter:	60pcs	
Min. Cutting Unit:	3LEDs	
Min. Cutting Length:	5cm	
Max Length Single Feed:	5m	

F21 Pixel Chasing

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	TAPE F21-24V-5050-70-DMX-RGB	Available Color
Input Voltage:	24V DC	RGB
Power/m:	15W	3000K
Working Mode:	DMX (RS485)	DW (10W/M)
LED Type:	SMD5050	
LED Qty /m:	70pcs	
Cutting Unit:	7LEDs	
Cutting Length:	10cm	
Pixel Qty/m:	10 Pixels	
Max Length Single Feed:	8m	



Model:	TAPE F21-24V-5050-70-DMX-RGBW	Available Color
Input Voltage:	24V DC	RGBW (2200K/3000K/4000K)
Power/m:	18W	
Working Mode:	DMX (RS485)	
LED Type:	SMD5050	
LED Qty /m:	70pcs	
Cutting Unit:	7LEDs	
Cutting Length:	10cm	
Pixel Qty/m:	10 Pixels	
Max Length Single Feed:	8m	



Model:	TAPE F21-24V-5050-70-SPI-RGB	Available Color
Input Voltage:	24V DC	RGB
Power/m:	16W	3000K
Working Mode:	SPI (8903)	DW (10W/M)
LED Type:	SMD5050	
LED Qty /m:	70pcs	
Cutting Unit:	7LEDs	
Cutting Length:	10cm	
Pixel Qty/m:	10 Pixels	
Max Length Single Feed:	8m	



Model:	TAPE F21-24V-5050-56-SPI-RGBW	Available Color
Input Voltage:	24V DC	RGBW (2200K/3000K/4000K)
Power/m:	15W	
Working Mode:	SPI (8904)	
LED Type:	SMD5050	
LED Qty /m:	56pcs	
Cutting Unit:	7LEDs	
Cutting Length:	12.5cm	
Pixel Qty/m:	8 Pixels	
Max Length Single Feed:	8m	



Luxury Hotel, South Africa, F16



F16 series



Material:
PVC/Silicon Optional



Waterproof rating
IP68



Bending Direction:
TOP



Beam Angle
120°



Min. Bending
120mm



Installation Temp.
0°C–55°C





Ambient Temp.
–25°C–55°C



Max Weight:
0.43kg/m




Dimmable:
DALI, 0–10V, DMX, Triac




F16 Mono color

Lumen Maintenance: 70,000 Hours L70@ 25°C




Model:	F16-24V-3528-120	Available Color			
Input Voltage:	24V DC	2200K-330lm	Green	360lm	
Power/m:	9W	2500K-330lm	Blue	55lm	
Working Mode:	PWM CV	2700K-330lm	Pink	320lm	
LED Type:	SMD3528	3000K-330lm	Red	110lm	
LED Qty /m:	144pcs	3500K-340lm	Amber	80lm	
Cutting Unit:	12LEDs	4000K-340lm	Orange	70lm	
Cutting Length:	8.33cm	5000K-360lm			
Max Length Single Feed:	32.8'/10m	5700K-360lm			
		6500K-360lm			



Model:	TAPE F16-24V-3528-144	Available Color			
Input Voltage:	24V DC	2200K-360lm	Green	390lm	
Power/m:	10W	2500K-360lm	Blue	60lm	
Working Mode:	PWM CV	2700K-360lm	Pink	360lm	
LED Type:	SMD3528	3000K-360lm	Red	120lm	
LED Qty /m:	144pcs	3500K-370lm	Amber	90lm	
Cutting Unit:	12LEDs	4000K-370lm	Orange	80lm	
Cutting Length:	8.33cm	5000K-400lm			
Max Length Single Feed:	32.8'/10m	5700K-400lm			
		6500K-400lm			


F16 Mono color

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	TAPE F16-24V-2835-120-CC	Available Color		
Input Voltage:	24V DC	2200K-280lm	Green	200lm
Power/m:	10W	2500K-280lm	Blue	35lm
Working Mode:	PWM CV (CC IC)	2700K-280lm	Lemon Yellow	250lm
LED Type:	SMD2835	3000K-280lm	Pink	150lm
LED Qty /m:	120pcs	3500K-330lm		
Cutting Unit:	6LEDs	4000K-330lm		
Cutting Length:	5cm	5000K-350lm		
Max Length Single Feed:	49.21'/15m	5700K-350lm		
		6500K-350lm		

F16 Tunable white



Model:	F16-24V-2835-120-DW	Available Color	
Input Voltage:	24V DC	2200K+5700K	
Power/m:	15W	2700K+5700K	
Working Mode:	PWM CV	3000K+5700K	
LED Type:	SMD2835		
LED Qty /m:	120pcs		
Cutting Unit:	12LEDs		
Cutting Length:	10cm		
Max Length Single Feed:	32.8'/10m		

F16 Multic RGB



Model:	F16-24V-5050-72-RGB	Available Color	
Input Voltage:	24V DC	RGB	
Power/m:	13W		
Working Mode:	PWM CV		
LED Type:	SMD5050		
LED Qty /m:	72pcs		
Cutting Unit:	6LEDs		
Cutting Length:	8.33cm		
Max Length Single Feed:	32.8'/10m		


F16 Multic RGBW




Model:	F16-24V-5050-72-RGBW	Available Color	
Input Voltage:	24V DC	RGBW (2200K/3000K/4000K)	
Power/m:	17W		
Working Mode:	PWM CV		
LED Type:	SMD5050		
LED Qty /m:	72pcs		
Cutting Unit:	6LEDs		
Cutting Length:	8.33cm		
Max Length Single Feed:	26.24'/8m		

F16 Pixel Chasing


Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	F16-24V-5050-70-DMX-RGB	Available Color
Input Voltage:	24V DC	RGB
Power/m:	15W	3000K
Working Mode:	DMX (RS485)	DW
LED Type:	SMD5050	
LED Qty /m:	70pcs	
Cutting Unit:	7LEDs	
Cutting Length:	10cm	
Pixel Qty/m:	10 Pixels	
Max Length Single Feed:	26.24'/8m	



Model:	F16-24V-5050-70-DMX-RGBW	Available Color
Input Voltage:	24V DC	RGBW (2200K/3000K/4000K)
Power/m:	18W	
Working Mode:	DMX (RS485)	
LED Type:	SMD5050	
LED Qty /m:	70pcs	
Cutting Unit:	7LEDs	
Cutting Length:	10cm	
Pixel Qty/m:	10 Pixels	
Max Length Single Feed:	26.24'/8m	



Model:	F16-24V-5050-70-SPI-RGB	Available Color
Input Voltage:	24V DC	RGB
Power/m:	16W	3000K
Working Mode:	SPI (8903)	DW
LED Type:	SMD5050	
LED Qty /m:	70pcs	
Cutting Unit:	7LEDs	
Cutting Length:	10cm	
Pixel Qty/m:	10 Pixels	
Max Length Single Feed:	26.24'/8m	



Model:	F16-24V-5050-56-SPI-RGBW	Available Color
Input Voltage:	24V DC	RGBW (2200K/3000K/4000K)
Power/m:	15W	
Working Mode:	SPI (8904)	
LED Type:	SMD5050	
LED Qty /m:	56pcs	
Cutting Unit:	7LEDs	
Cutting Length:	12.5cm	
Pixel Qty/m:	8 Pixels	
Max Length Single Feed:	26.24'/8m	



F18 series



Material:
PVC



Waterproof rating
IP68



Bending Direction:
TOP



Beam Angle
260°





Min. Bending
120mm



Ambient Temp.
-25°C-55°C



Dimmable:
DALI, 0-10V, DMX, Triac



F18 Mono color

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	F18-24V-3528-144	Available Color		
Input Voltage:	24V DC	2200K-360lm	Green	180lm
Power/m:	12W	2500K-360lm	Blue	50lm
Working Mode:	PWM CV	2700K-360lm	Pink	140lm
LED Type:	SMD3528	3000K-360lm	Red	120lm
LED Qty /m:	144pcs	3500K-370lm	Amber	110lm
Cutting Unit:	12LEDs	4000K-370lm	Orange	90lm
Cutting Length:	8.33cm	5000K-400lm		
Max Length Single Feed:	32.8'/10m	5700K-400lm		
		6500K-400lm		

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	TAPE F18-24V-2835-120-CC	Available Color		
Input Voltage:	24V DC	2200K-280lm	Green	150lm
Power/m:	10W	2500K-280lm	Blue	35lm
Working Mode:	PWM CV (CC IC)	2700K-280lm	Lemon Yellow	180lm
LED Type:	SMD2835	3000K-280lm	Pink	110lm
LED Qty /m:	120pcs	3500K-330lm		
Cutting Unit:	6LEDs	4000K-330lm		
Cutting Length:	5cm	5000K-350lm		
Max Length Single Feed:	49.21'/15m	5700K-350lm		
		6500K-350lm		

F18 Mono color

Lumen Maintenance: 70,000 Hours L70@ 25°C



Model:	F18-24V-3528-144-CC	Available Color		
Input Voltage:	24V DC	2200K-540lm	Green	225lm
Power/m:	15W	2500K-540lm	Blue	60lm
Working Mode:	PWM CV (CC IC)	2700K-540lm	Lemon Yellow	270lm
LED Type:	SMD3528	3000K-540lm	Pink	175lm
LED Qty /m:	144pcs	3500K-550lm		
Cutting Unit:	12LEDs	4000K-550lm		
Cutting Length:	5cm	5000K-580lm		
Max Length Single Roll:	10mtr.	5700K-580lm		
		6500K-580lm		

F18 Tunable white



Model:	F18-24V-2835-120-DW	Available Color		
Input Voltage:	24V DC	2200K+5700K		
Power/m:	15W	2700K+5700K		
Working Mode:	PWM CV	3000K+5700K		
LED Type:	SMD2835			
LED Qty /m:	120pcs			
Cutting Unit:	12LEDs			
Cutting Length:	10cm			
Max Length Single Feed:	32.8'/10m			

F18 Multic RGB



Model:	F18-24V-5050-72-RGB	Available Color		
Input Voltage:	24V DC	RGB		
Power/m:	13W			
Working Mode:	PWM CV			
LED Type:	SMD5050			
LED Qty /m:	72pcs			
Cutting Unit:	6LEDs			
Cutting Length:	8.33cm			
Max Length Single Feed:	32.8'/10m			

F18 Multic RGBW



Model:	F18-24V-5050-72-RGBW	Available Color		
Input Voltage:	24V DC	RGBW (2200K/3000K/4000K)		
Power/m:	17W			
Working Mode:	PWM CV			
LED Type:	SMD5050			
LED Qty /m:	72pcs			
Cutting Unit:	6LEDs			
Cutting Length:	8.33cm			
Max Length Single Feed:	26.24'/8m			

F18 Pixel Chasing

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	F18-24V-5050-70-DMX-RGB	Available Color
Input Voltage:	24V DC	RGB
Power/m:	15W	3000K
Working Mode:	DMX (RS485)	DW
LED Type:	SMD5050	
LED Qty /m:	70pcs	
Cutting Unit:	7LEDs	
Cutting Length:	10cm	
Pixel Qty/m:	10 Pixels	
Max Length Single Feed:	26.24'/8m	



Model:	F18-24V-5050-70-DMX-RGBW	Available Color
Input Voltage:	24V DC	RGBW (2200K/3000K/4000K)
Power/m:	18W	
Working Mode:	DMX (RS485)	
LED Type:	SMD5050	
LED Qty /m:	70pcs	
Cutting Unit:	7LEDs	
Cutting Length:	10cm	
Pixel Qty/m:	10 Pixels	
Max Length Single Feed:	26.24'/8m	



Model:	F18-24V-5050-70-SPI-RGB	Available Color
Input Voltage:	24V DC	RGB
Power/m:	16W	3000K
Working Mode:	SPI (8903)	DW
LED Type:	SMD5050	
LED Qty /m:	70pcs	
Cutting Unit:	7LEDs	
Cutting Length:	10cm	
Pixel Qty/m:	10 Pixels	
Max Length Single Feed:	26.24'/8m	



Model:	F18-24V-5050-56-SPI-RGBW	Available Color
Input Voltage:	24V DC	RGBW (2200K/3000K/4000K)
Power/m:	15W	
Working Mode:	SPI (8904)	
LED Type:	SMD5050	
LED Qty /m:	56pcs	
Cutting Unit:	7LEDs	
Cutting Length:	12.5cm	
Pixel Qty/m:	8 Pixels	
Max Length Single Feed:	26.24'/8m	



Luxury Hotel, Azerbaijan



F10 series



Material:
PVC



Waterproof rating
IP68



Bending Direction:
TOP



Beam Angle
120°



Min. Bending
80mm



Installation Temp.
0°C-55°C





Ambient Temp.
-25°C-55°C



Max Weight:
0.30kg/m




Dimmable:
DALI, 0-10V, DMX, Triac




F10 Mono color

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	F10-24V-2835-144	Available Color		
Input Voltage:	24V DC	2200K- 410lm	Green	200lm
Power/m:	10W	2500K- 410lm	Blue	70lm
Working Mode:	PWM CV	2700K- 410lm	Red	200lm
LED Type:	SMD2835	3000K- 410lm		
LED Qty / meter:	144pcs	3500K- 430lm		
Min. Cutting Unit:	12LEDs	4000K- 430lm		
Min. Cutting Length:	8.33cm	5000K- 460lm		
Max Length Single Feed:	32.8'/10m	5700K- 460lm		
		6500K- 460lm		



Model:	F10-48V-2835-84-CC	Available Color		
Input Voltage:	48V DC	2200K- 205lm	Green	220lm
Power/m:	5W	2500K- 205lm	Blue	35lm
Working Mode:	PWM CV(CC IC)	2700K- 205lm	Red	70lm
LED Type:	SMD2835	3000K- 205lm		
LED Qty / meter:	84pcs	3500K- 215lm		
Min. Cutting Unit:	14LEDs	4000K- 215lm		
Min. Cutting Length:	16.67cm	5000K- 230lm		
Max Length Single Feed:	164.04'/50m	5700K- 230lm		
		6500K- 230lm		



Restaurant, France, F17 Mono



F17 series



Material:
PVC



Waterproof rating
IP68



Bending Direction:
Side



Beam Angle
120°



Min. Bending
150mm



Installation Temp.
0°C-55°C





Ambient Temp.
-25°C-55°C



Max Weight:
0.43kg/m




Dimmable:
DALI, 0-10V, DMX, Triac




F17 Mono color

Lumen Maintenance:70,000 Hours L70@ 25°C




Model:	F17-24V-2835-120	Available Color			
Input Voltage:	24V DC	● 2200K- 510lm	● Green	300lm	
Power/m:	10W	● 2500K- 510m	● Blue	73lm	
Working Mode:	PWM CV	● 2700K- 510lm	● Red	110lm	
LED Type:	SMD2835	● 3000K- 510lm			
LED Qty / meter:	120pcs	● 3500K- 510lm			
Min. Cutting Unit:	12LEDs	● 4000K- 520lm			
Min. Cutting Length:	10cm	● 5000K- 550lm			
Max Length Single Feed:	16.4'/5m	● 5700K- 550lm			
		● 6500K- 550lm			



Model:	F17-24V-2835-60	Available Color			
Input Voltage:	24V DC	● 2200K- 250lm	● Green	150lm	
Power/m:	5W	● 2500K- 250m	● Blue	35lm	
Working Mode:	PWM CV	● 2700K- 250lm	● Red	55lm	
LED Type:	SMD2835	● 3000K- 250lm			
LED Qty / meter:	60pcs	● 3500K- 250lm			
Min. Cutting Unit:	12LEDs	● 4000K- 575lm			
Min. Cutting Length:	10cm	● 5000K- 275lm			
Max Length Single Feed:	5m	● 5700K- 275lm			
		● 6500K- 275lm			



Shanghai China

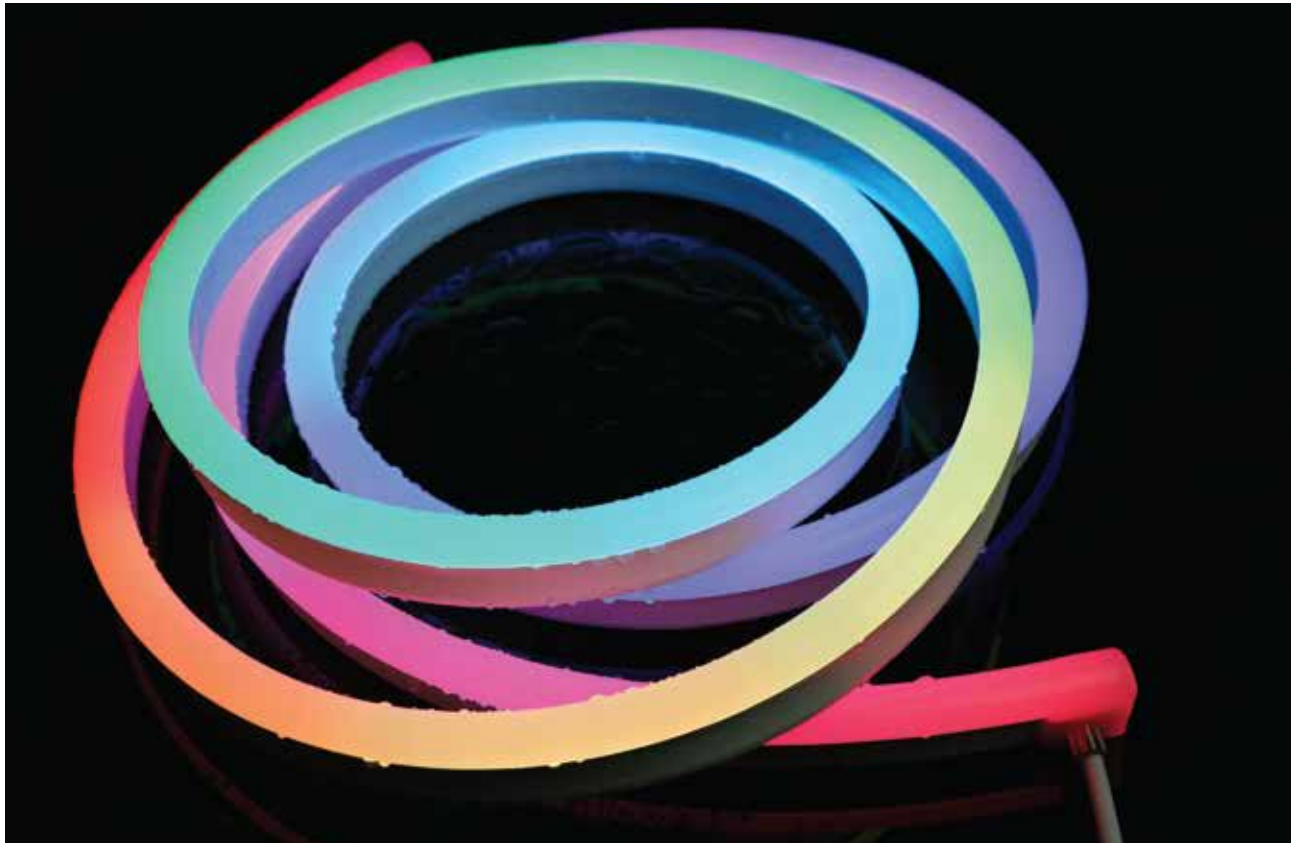

F09 series



Material:
PVC / Silicon optional



Waterproof rating
IP68



Bending Direction:
Side



Beam Angle
120°



Min. Bending
80mm



Installation Temp.
0°C–55°C





Ambient Temp.
–25°C–55°C



Max Weight:
0.165kg/m



Dimmable:
DALI, 0–10V, DMX, Triac



F09 Mono color

Lumen Maintenance: 70,000 Hours L70@ 25°C



Model:	F09-24V-2835-70	Available Color			
Input Voltage:	24V DC	2200K-110lm	Green	70lm	
Power/m:	5W	2500K-110lm	Blue	13lm	
Working Mode:	PWM CV	2700K-110lm	Lemon Yellow	90lm	
LED Type:	SMD2835	3000K-110lm	Pink	55lm	
LED Qty / meter:	70pcs	3500K-120lm	Red	40lm	
Min. Cutting Unit:	7LEDs	4000K-120lm	Amber	40lm	
Min. Cutting Length:	10cm	5000K-130lm	Orange	1lm	
Max Length Single Feed:	32.8'/10m	5700K-130lm			
		6500K-130lm			



Model:	F09-24V-2835-120	Available Color			
Input Voltage:	24V DC	2200K-260lm	Green	160lm	
Power/m:	12W	2500K-260lm	Blue	36lm	
Working Mode:	PWM CV	2700K-260lm	Lemon Yellow	215lm	
LED Type:	SMD2835	3000K-260lm	Pink	130lm	
LED Qty / meter:	120pcs	3500K-280lm	Red	96lm	
Min. Cutting Unit:	12LEDs	4000K-280lm	Amber	96lm	
Min. Cutting Length:	10cm	5000K-300lm	Orange	72lm	
Max Length Single Feed:	32.8'/10m	5700K-300lm			
		6500K-300lm			



Model:	F09-48V-2835-84-CC	Available Color			
Input Voltage:	48V DC	2200K-220lm	Green	140lm	
Power/m:	10W	2500K-220lm	Blue	26lm	
Working Mode:	PWM CV(CC IC)	2700K-220lm	Lemon Yellow	180lm	
LED Type:	SMD2835	3000K-220lm	Pink	110lm	
LED Qty / meter:	84pcs	3500K-240lm	Red	80lm	
Min. Cutting Unit:	14LEDs	4000K-240lm	Amber	80lm	
Min. Cutting Length:	16.67cm	5000K-260lm	Orange	64lm	
Max Length Single Feed:	164.04'/50m	5700K-260lm			
		6500K-260lm			



F09 Mono Color-2700K



F07 Mono Color- 3000K

F08 series



Material:
PVC



Waterproof rating
IP68



Bending Direction:
Side



Beam Angle
120°



Min. Bending
150mm



Installation Temp.
0°C-55°C






Ambient Temp.
-25°C-55°C



Max Weight:
0.15kg/m




Dimmable:
DALI, 0-10V, DMX, Triac

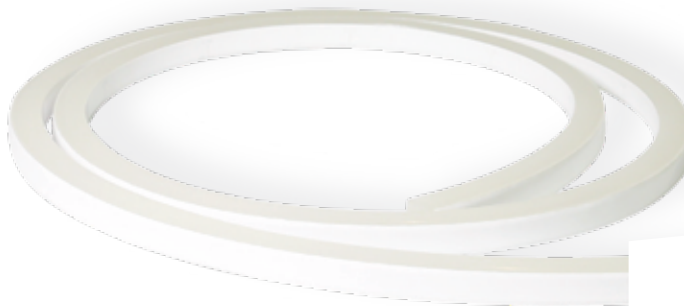


F08 Mono color

Lumen Maintenance:70,000 Hours L70@ 25°C



Model:	F08-24V-2835-120	Available Color		
Input Voltage:	24V DC	2200K-200lm	Green	100lm
Power/m:	5W	2500K-200lm	Blue	40lm
Working Mode:	PWM CV	2700K-210lm	Red	65lm
LED Type:	SMD2835	3000K-210m		
LED Qty / meter:	120pcs	3500K-210lm		
Min. Cutting Unit:	12LEDs	4000K-220lm		
Min. Cutting Length:	10cm	5000K-220lm		
Max Length Single Feed:	16.4'/5m	5700K-230lm		
		6500K-230lm		



Model:	F08-24V-2835-120	Available Color		
Input Voltage:	24V DC	2200K-400lm	Green	200lm
Power/m:	10W	2500K-400lm	Blue	80lm
Working Mode:	PWM CV	2700K-420lm	Red	130lm
LED Type:	SMD2835	3000K-420lm		
LED Qty / meter:	120pcs	3500K-420lm		
Min. Cutting Unit:	12LEDs	4000K-440m		
Min. Cutting Length:	10cm	5000K-440lm		
Max Length Single Feed:	16.4'/5m	5700K-460m		
		6500K-460m		



F06 Mono Color- 3000K

F06 series



Material:
PVC



Waterproof rating
IP68



Bending Direction:
Top



Beam Angle
120°



Min. Bending
150mm



Installation Temp.
0°C–55°C






Ambient Temp.
–25°C–55°C



Max Weight:
0.15kg/m



Dimmable:
DALI, 0–10V, DMX, Triac

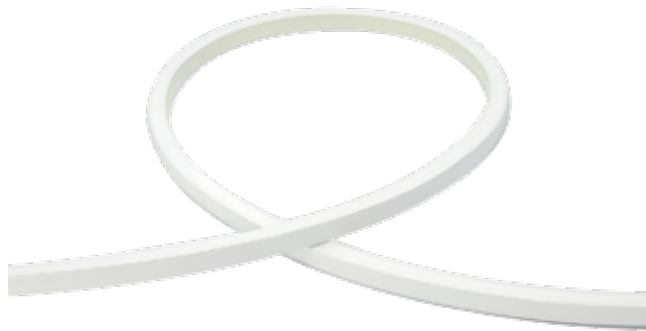

F06 Mono color

Lumen Maintenance: 70,000 Hours L70@ 25°C



Model:	F06-24V-2835-60	Available Color		
Input Voltage:	24V DC	2200K-255lm	Green	145lm
Power/m:	5W	2500K-255lm	Blue	30lm
Working Mode:	PWM CV	2700K-265lm	Red	65lm
LED Type:	SMD2835	3000K-265lm		
LED Qty / meter:	60pcs	3500K-265lm		
Min. Cutting Unit:	12LEDs	4000K-265lm		
Min. Cutting Length:	10cm	5000K-300lm		
Max Length Single Feed:	16.4'/5m	5700K-300lm		
		6500K-300lm		



Model:	F06-24V-2835-120	Available Color		
Input Voltage:	24V DC	2200K-510lm	Green	
Power/m:	10W	2500K-510lm	Blue	
Working Mode:	PWM CV	2700K-530lm	Red	
LED Type:	SMD2835	3000K-530m		
LED Qty / meter:	120pcs	3500K-530lm		
Min. Cutting Unit:	12LEDs	4000K-530m		
Min. Cutting Length:	10cm	5000K-600lm		
Max Length Single Feed:	16.4'/5m	5700K-600m		
		6500K-600m		


Control System

- PWM dimming
- 0/1-10V dimming
- DALI dimming
- DMX dimming
- Triac dimming
- PWM Control
- DMX Control
- SPI Control




Connection


SPI LED Neon Connection

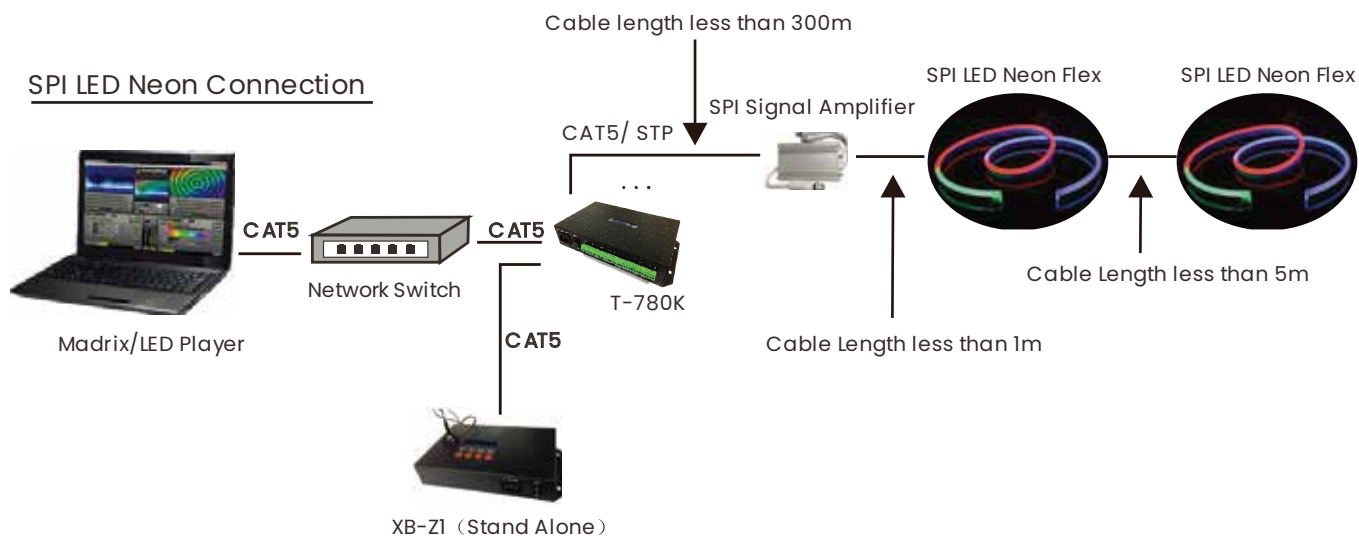

DMX(RS485) LED Neon Connection

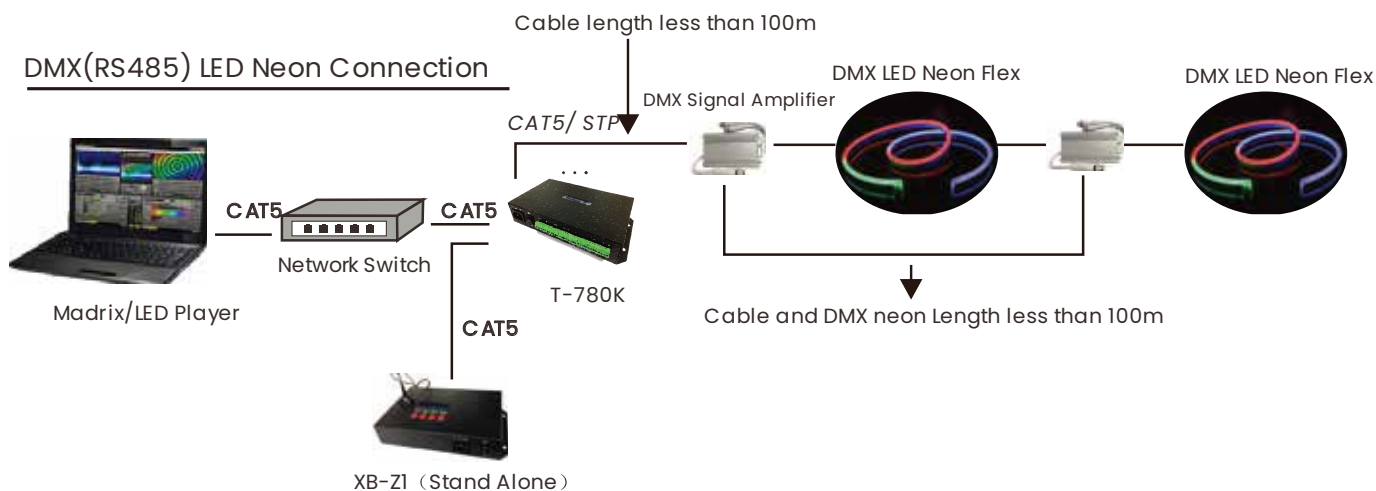

PWM RGB(W) LED Neon Connection

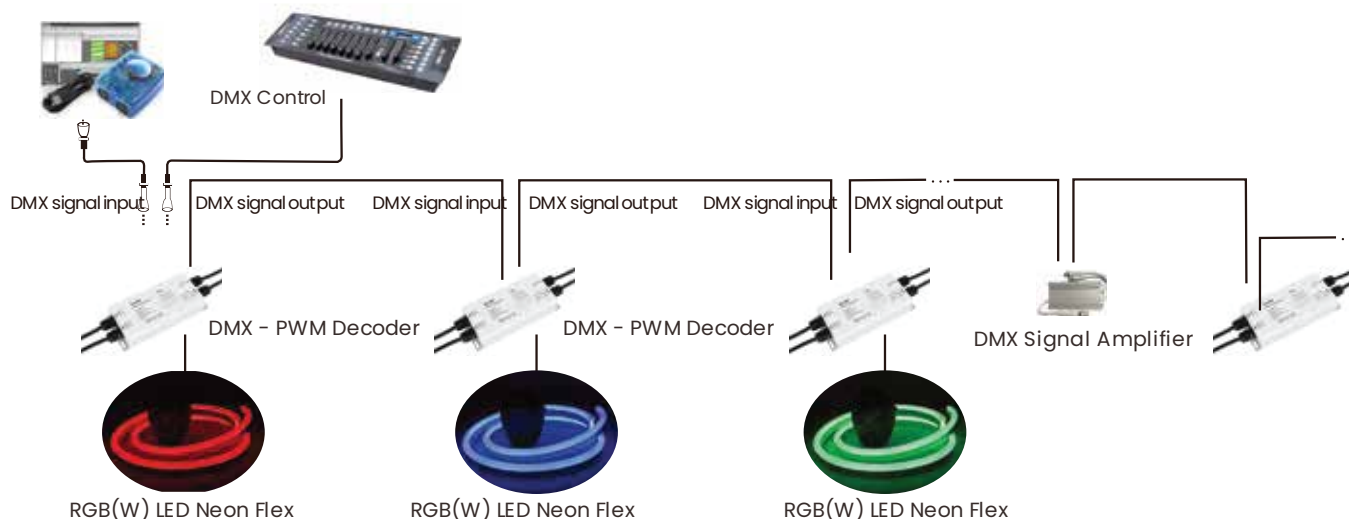

PWM Control

Name	Description	Picture
Dimmer	Product Model: K1+T1 Input Voltage: DC12V-24V Max Load: 4Ax3CH MAX 12A Max Output Power: 144W(12V)/288W(24V) Waterproof Rating: IP20 Size: L86×W86×H51 (mm)	
Controller	Product Model: BC-311RF Input Voltage: DC12V-24V Max Load: 8A/CH*3 Max Output Power: 580W(24V) Waterproof Rating: IP20 Size: L165×W56×H36(mm)	
Controller	Product Model: BC-354 Input Voltage: DC12V-24V Max Load: 5A/CH×4 Max Output Power: 240W(12V)/480W(24V) Waterproof Rating: IP20 Size: L176 X W46 X H30(mm)	
Controller	Product Model: BC-380-8A Input Voltage: DC5V-DC36V Max Load: 8A/CH×3 Max Output Power: 580W(24V) Waterproof Rating: IP20 Size: L142×W73×H30(mm)	
Control Pannel	Product Model: T13-1 Input Voltage: 24V Max Load: 3A/CH×4 Max Output Power: 144-288W Waterproof Rating: IP20 Size: L86×W86×H35(mm)	
Power Repeater	Product Model: LG-SA-07 Input Voltage: 24V Max Load: 5A/CH×3 Max Output Power: 360W(24V) Waterproof Rating: IP67 Size: L142×W73×H30(mm)	
Power Repeater	Product Model: BC-964-DIN Input Voltage: DC5V-DC24V Max Load: 6A×4CH Max Output Power: 288W/576W(12V/24V) Waterproof Rating: IP20 Size: L111×W46×H66(mm)	
Power Repeater	Product Model: EV4-WP Input Voltage: 12-36VDC Max Load: 5A/CH×4 Max Output Power: 4×(60-180)W Waterproof Rating: IP67 Size: L170×W78×H38(mm)	

0/1-10V Dimming

Name	Description	Picture
Dimming Driver	Product Model: BC-331-10A Input Voltage: DC12V-DC24V Max Current: 10A/CH x 1CH Input Signal: 0/1-10V or PUSH DIM Output Signal: Constant Voltage PWM Max Output Power: 120W(12V)/240W(24V) Size: L176×W46×H30(mm)	
Dimming Power Supply	Product Model: AD-150-12/24-F1M1 Dimming Interface: 0-10V (1-10V/10V PWM/RX) Output Voltage: 12VDC / 24VDC Output Current: Max. 12.5A / Max. 6.25A Output Power Range: 0~150W Input Voltage: 100-240Vac Input Current: 115Vac≤1.95A, 230Vac≤0.8A Size: L273×W57×H37(mm)	
Dimmer	Product Model: E610P Input Voltage: 100~240Vac, 50-60Hz Switching Power: 90~250Vac, 5A Output: 0~10V Max. 50mA Anti surge: ≤100A / 10msec Size: L86×W86×H50(mm)	
Dimming Driver	Product Model: BC-331-DIN Input voltage: DC12V-DC24V Output current: 18A x1CH Output Power: 216W(12V) / 432W(24V) Input Signal: 0/1-10V PUSH DIM Size: L111×W46×H66(mm)	

DALI Dimming

Name	Description	Picture
DALI Dimming Driver	Product Model:BC-344-LED Input voltage: DC12V-24V Load Current: 6A×4CH Max 24A Max Output Power: 288W/576W(12V/24V) Waterproof Rating: IP20 Size: L111×W46×H66(mm)	
DALI Dimming Driver	Product Model: BC-343-LED Input voltage: DC12V-DC24V Output current: 3CH×5A Output Power: 180W(12V)/360W(24V) Input Signal: DALI Dimming signal Size: L176×W46×H30(mm)	
DALI Dimming Driver	Product Model:BC-341-LED Input voltage: DC12V-DC24V Output current: 1CH×10A Output Power: 120W(12V)/240W(24V) Input Signal: DALI Dimming signal Size: L176 X W46 X H30(mm)	
DALI Dimming Power Supply	Product Model: DALI-150-12/24-F1M1 Dimming interface: DALI (IEC62386), Push DIM Input Voltage: 100-240V AC Input Current: 115V AC≤1.95A, 230V AC≤0.8A Output Voltage: 12V DC / 24V DC Output Current: Max 12.5A / Max 6.25A Output Power: Max 150W Output Power Range: 0~150W Dimming Range:: 0~100%, dimming depth: Max 0.1% Size: L273×W57×H37(mm)	
DALI Bus Power supply	Product Model:DALI-PS-DIN Input Voltage Range: 100-240V AC Frequency : 50/60Hz AC Current (typ.): ≤0.09A(AT 115V AC), ≤0.05A(AT 230V AC) Leakage Current: <0.5mA/230V AC Rated Current: 200mA Operating Voltage: 15V DC MaxRated Power: 3W Working Temp.: -30°C ~ 55°C Size: L115×W35×H67(mm)	
DALI touch panel	Product Model:EDA1/EDA2/EDA3/EDA4 Power supply: DALI power Output signal: DALI Static current: 6mA@16V Standby current: 4mA@16V Working temperature: -30°C~55°C Dimming key: EDA1: 1CH control EDA2: 2CH control EDA4: 4CH control EDA3: 3CH control Size: L86×W86×H37(mm)	

DMX Control

Name	Description	Picture
DMX-PWM Decoder	Product Model: BC-834-DIN Input Voltage: DC12V-24V Output Current: 10A×1CH/ 8A×3CH/ 6A×4CH Output Power: 120W/240W(12V/24V)/ 288W/576W(12V/24V)300W Grey Scale: 4096×1/3/4 Input Signal: DMX512/1990 Output Signal: Constant Voltage PWM Decode Channel: 1CH/3CH/4CH DMX512 Socket: Terminal Block/RJ45 Size: L111×W46×H66(mm)	
DMX-PWM Decoder	Product Model: BC-853 Input Voltage: DC12V-DC24V Max load current: 6A×3CH Max Output Power: 72W×3CH(12V)/144W×3CH(24V) Grey Scale: 4096 levels×3 Input Signal: DMX512/1990 Output Signal: Constant Current PWM×3 Decode Channel: 3CH DMX512 socket: XLR-3R port/ RJ45 port/ terminal block Size: L157×W65×H40(mm)	
DMX-PWM Decoder	Product Model: D4-WP Input voltage: 12-36VDC Input current: 20.5A Output voltage: 4 x (12-36)VDC Output current: 4CH,5A/CH Output power: 4 x (60-180)W Waterproof rating: IP67 Size: L130×W50×H24(mm)	
DMX-PWM Decoder	Product Model: BC-831 Input Voltage: DC12V-DC24V Max load current: 1CH×10A Max Output Power: 120W(12V)/240W(24V) Grey Scale: 4096 levels×1 Input Signal: DMX512/1990 Output Signal: Constant Voltage PWM Decode Channel: 1CH DMX512 socket: Terminal Block Size: L176×W46×H30(mm)	
DMX Control	Product Model: U9 OS Requirement: Mac OSx 10.6/10.7/10.8 - Windows XP/VISTA/SEVEN/8 32/64 bits and USB 2.0 Connections: XLR3, mini USB, 1 HE10 Power: Power From 5V to 5.5V DC (AC/DC adapter) Use: Environment IP20 Temperature 0°C to 50°C Buttons: 2 buttons to change scene (previous/next) + 1 button to change dimmer Size: L140×W135×H50(mm)	
MADRIX PLEXUS	Power Supply: External, AC 100 V – 240 V ~ 50/60 Hz input Power Consumption: 2.5 W max. (500 mA max.) USB: USB 2.0, type B port, Power over USB DMX512: 2x 512 DMX channels, input or output DMX512 Ports: 5-pin, XLR, female, NEUTRIK Extension Port: 15-pin, D-Sub, US, female SD Card Slot: SD (2 GB max.) supported and SDHC cards (32 GB max.) supported Handling: 5 control buttons Size: L154×W111×H45(mm)	
WIFI DMX Control	Product Model: WiFi-101-DMX4 Input Voltage: 12 ~ 24V DC Output: DMX512, 512CH Protocol: 2.4GHz Wi-Fi, 802.11b/g/n Working Temperature: -30 °C ~ 55 °C Size: L125 x W33 x H20(mm)	
DMX Control	Product Model: DMX512 Controller Input Voltage: DC9V(With adapter) Output signal: DMX512 DMX Interface: XLR-3RJ45 Terminal Block Working Temp: -20 °C ~ 55 °C Size: 161mmx100mmx30mm	


DMX Control

Name	Description	Picture
DMX Control	Product Model: XC Input Voltage: 5-24VDC Power consumption : 1W Input signal : RF 2.4GHz Output signal: DMX512 Dynamic mode : 32 IP rating: IP20 Size : L97mmxW33mmxH18mm	
DMX Signal Sender & Receiver	Product Model: DM-WT / DM-WR Input Voltage: 5 VDC 500mA Communication distance : 400 meters (visible distance) Work frequency section : 2.4G ISM,126 channels frequency section. Max transmitting power rate : 20dBm.	

Pixel Control (DMX & SPI)

Name	Description	Picture
DMX Address Writer	Product Model: DMX-AW DMX512 address writer for UCS512A/B/C Input Voltage: 5V Compatible IC: UCS512B, UCS512C Function: Address Write Address test Function test Size : L159×W89×H24 (mm)	
DMX Address Writer	Product Model: YM-DMXDC DMX512 address writer for DMX RGBW LED Neon Input Voltage: 5V-24V Compatible IC: UCS512EH Function: Address Write, Address test, Function test Size: L115*W77*H34	
Signal Amplifier	Product Model: LG-SA-06 Required if the length from controller to the LED neon is more than 100 meters. Used for UCS512B only Signal Input: Standard or Extended DMX512 Signal Output: Single Wire DMX (DMX+, GND) Input Voltage: DC24V Weight: 0.35Kg Protection Rating: IP67 Size : L103×W55×H35(mm)	
DMX Signal Amplifier	Product Model: LG-SA-09 Required if the length from controller to the LED neon is more than 100 meters. Used for UCS512EH& UCS512C. Signal Input: DMX512 Signal Output: DMX512 (DMX+, DMX-, GND) Input Voltage: DC24V Weight: 0.35Kg Protection Rating: IP67 Size : L103×W55×H35(mm)	

Pixel Control (DMX & SPI)

Name	Description	Picture
SPI Signal Amplifier	Product Model: LG-SA-08 For SPI (UCS2903/UCS8904) version only, Required if the length from controller to the LED neon is more than 10 meters. Signal Input: SPI/TTL Signal Output: SPI/TTL Input Voltage: DC24V Weight: 0.35Kg Protection Rating: IP67 Size : L103×W55×H35(mm)	
Pixel Controller	Product Model: K-1000C-RM Working mode: SD card , built in programs. The controller can work with 16 files , 1 output only , can take 512 pixels Output Signal: SPI (TTL) and DMX512 Input Voltage: DC24V Weight: 0.3Kg Controllers can connect together to extend pixels Edit software: LEDedit 2019 With remote control Size : L159×W89×H24 (mm)	
Pixel Controller	Product Model: K-8000C Working mode: SD card and 32 built-in programs, can work with 16 files, 8 outputs , each output can take 512 pixels, can connect and work together Output Signal: SPI (TTL) and DMX512 Input Voltage: AC110V-240V Weight: 1.2Kg Power: 3W Edit software: LEDedit Size : L180×W120×H30 (mm)	
Pixel Controller	Product Model: K-8000L With Decoder funtion to connect with DMX control pannel like GrandMa The controller can work with 16 files 8 outputs , each output can take 512 pixels Controllers can connect and work together Output Signal: SPI (TTL) and DMX512 Input Voltage: AC110V-240V Weight: 0.8Kg Power: 3W Edit software: LED edit Size : L290×W113×H49 (mm)	
Pixel Controller	Product Model: T-780K Opearting with PC, Stand Alone, Working with Madrix 8 outputs , each output can take 512 pixels Controllers can connect and work together Output Signal: SPI or DMX512 Input Voltage: AC110V-240V Weight: 1.5Kg Software: LED Player and LED Edit and Madrix Size : L244×W137×H49 (mm)	
Pixel Controller	Product Model: T-700K Working with XB-Z1 or XB-808 only, as slave controller 8 outputs , each output can take 512 pixels Controllers can connect and work together Output Signal: SPI (TTL) and DMX512 Input Voltage: AC110V-240V Weight: 1.2kg Power: 5W Size: L257*W140*H40mm	
Pixel Controller	Product Model: XB-Z1 Master Control, Working with T-500K-C/T-780K/T-700K Can be synchronized by 4G or BTS Software: LED Edit Input Voltage: AC110V-220V Weight: 1.2Kg Size: L247*W146*H54mm	

Pixel Control (DMX & SPI)

Name	Description	Picture
Pixel Controller	Product Model: XB-808 Master Control, Working with T-500K-C/ T-780K/ T-700K Can be synchronized by 4G or BTS or Microwave App available connected by Bluetooth Software: LED Edit & LED player & App Input Voltage: AC110V-220V Weight: 1.2Kg Size : L247*W146*H54mm	
DMX to SPI Decoder	Product Model: BC-802 Used when connecting with DMX controller Signal Input: DMX512 Signal Output: SPI Input Voltage: DC24V Weight: 0.32Kg Protection Rating: IP20g Suporting IC: 1903 or 8904 Size :L125×W52×H40(mm)	
Madrix Nebula	Product Model: Madrix Nebula Power supply: DC 5V-24V USB: USB 2.0 Type B port Data output: 2*512 channels SPI Ports: 2* ports Ethernet: 2 RJ45 Auto MDI-X, 10/100 MBit/s Supported IC: UCS8903, UCS8904, UCS512B3 Dimension: 92mm*70mm*45mm Weight: 130g IP rating: IP20 Size : L92×W70×H45 (mm)	
Madrix 5 Basic Version Key	Product Model: Madrix 5 Basic Version Key DMX-Based Output DMX Channels: 16,384 Channels DMX Universes Example: 32 Universes RGB Voxels Example: 5,461 Voxels DVI-Based Output DVI Voxels: 262,144 Voxels Render Resolution Example:512 x 512 Pixels	
Pixel Controller	Product Model: MR-318DW Working with PC or Stand Alone 8 outputs , each output can take Max 512 pixels Can not extend more controllers Output Signal: Standard or Extended DMX512 Software: MR Player Feature: Brightness Adjust, Remote Control,Address Writing Input Voltage: AC110V-240V Size : L283W134*H45mm	 
Pixel Controller	Product Model: MR-218DW Working with PC or MR-BF12B 8 outputs , each output can take Max 512 pixels Controllers can connect and work together Output Signal: Standard or Extended DMX512 Input Voltage: AC110V-240V Size : L283W134*H45mm	 
Pixel Controller	Product Model: MR-BF12B Master Control, Working with MR-218 Series Software: MR Player Input Voltage: AC110V-220V Size: L283W134*H45mm	 
Network Switch	Input Volt: 120-240V Port:8 ports RJ45 Standard: IEEE802.3, IEEE802.3u, IEEE802.3x Size:158×100×25 (mm) Speed: 10/100 (M) Protection Rating: IP20	

Installation Accessories

Connectors List










	Mold Injection Side	Mold Injection Bottom	Mold Injection Direct	Mold Injection Bottom L	Mold Injection Middle	DIY Screw Connector	DIY Snap Connector	DIY Splice Connector
Photos								
F21	•	•	•			•	•	•
F15	•	•	•		•	•	•	•
SF15	•	•	•			•	•	•
F16	•	•	•	•		•	•	•
SF16	•	•	•	•		•	•	•
F18	•	•	•	•		•	•	•
SF18	•	•	•	•		•	•	•
F17	•	•	•					
F09	•	•	•					
F08	•	•	•					
F06	•	•	•					

Mounting Channel

AS: Anodized Silver White










AB: Anodized Black

PW: Painted White

Model	Description	Size	Picture
ALC15S01	Use for: F15 & F21 Length option: 1m, 2m, 35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Standard		
ALC15H01	Use for: F15 & F21 Length option: 1m, 2m, 35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Cable Hiding		
SSC15S01-05	Use for: F15 & F21 Length option: 5cm Material: Stainless steel Surface: Natural color Type: 316 Stainless steel		
ALC15S02	Use for: F15 & F21 Length option: 1m, 2m, 35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Anti-drop for upside down installation		
SSC15FLX	Use for: F15 & F21 Length option: 10cm, 30cm, 50cm, 100cm Material: Stainless steel Surface treatment : Polished Type: Flexible		
ALC15V01	Use for: F15 & F21 Length option: 1m, 2m, 35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Standard		
ACC-HX-S2830C2	Used with mounting channel for angle adjustment		
ALC21S01	Use for: F21 Length option: 1m, 2m, 35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Standard		
PC15S01	Use for: F15, F21 Length option: 1m, 2m, 35mm Material: Plastic Color : Transparent Type: Standard		

Mounting Channel

AS: Anodized Silver White AB: Anodized Black PW: Painted White

Model	Description	Size	Picture
ALC16S02	Use for: F16, F17 Length option: 1m, 2m, 35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Standard		
ALC16H01	Use for: F16, F17 Length option: 1m, 2m, 35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Cable Hiding		
SSC16S01-05	Use for: F16, F17 Length option: 5cm Material: Stainless steel Surface: Natural color Type: 316 Stainless steel		
ALC16S03	Use for: F16, F17 Length option: 1m, 2m, 35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Anti-drop for upside down installation		
SSC16FLX	Use for: F16, F17 Length option: 10cm, 30cm, 50cm, 100cm Material: Stainless steel Surface treatment: Polished Type: Flexible		
ALC10S01	Use for: F10 Length option: 1m, 2m, 35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Standard		
ALC09S01	Use for: F09 Length option: 1m, 2m, 35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Standard		
ALC08S01	Use for: F08 Length option: 1m, 2m, 35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Standard		
ALC-PC-18S01	Use for: F18 Length option: 1m, 2m, 35mm Material: Aluminum alloy+Plastic Color: Silver Transparent Type: Standard		

Accessories List

DIY Connectors

Model	Description	Sample
DIY-SC-FR-15-D-01-A	2 PIN Mono color DIY screw front connector kit, Direct cable output, Suitable for F15/F21 Series	
DIY-SC-FR-15-D-02-A	2 PIN Mono color DIY screw front connector kit, Direct cable output, Suitable for F15/F21 Series	
DIY-SC-FR-15-B-01-A	2 PIN Mono color DIY screw front connector kit, Bottom cable output, Suitable for F15/F21 Series	
DIY-SC-FR-15-B-02-A	2 PIN Mono color DIY screw front connector kit, Bottom cable output, Suitable for F15/F21 Series	
DIY-SC-FR-15-D-01-SM-A	2 PIN Mono color DIY screw front connector kit, Cable with Male Connector. Direct cable output, Suitable for F15/F21 Series	
DIY-SC-FR-15-D-02-SF-A	2 PIN Mono color DIY screw front connector kit, Cable with Female Connector. Direct cable output, Suitable for F15/F21 Series	
DIY-SC-FR-15-B-01-SM-A	2 PIN Mono color DIY screw front connector kit, Cable with Male Connector. Bottom cable output, Suitable for F15/F21 Series	
DIY-SC-FR-15-B-02-SF-A	2 PIN Mono color DIY screw front connector kit, Cable with Female Connector. Bottom cable output, Suitable for F15/F21 Series	
DIY-SC-END-15	IP67 End cap, Suitable for F15/F21 Series	
DIY-SC-EXT-15-A	2 PIN DIY Splice connector, Suitable for F15/F21 Mono color Series	
DIY-SC-FR-15-D-01-RGB	4 PIN Multi color DIY screw front connector kit, Direct cable output, Suitable for F15/F21 Series	
DIY-SC-FR-15-D-02-RGB	4 PIN Multi color DIY screw front connector kit, Direct cable output, Suitable for F15/F21 Series	
DIY-SC-FR-15-B-01-RGB	4 PIN Multi color DIY screw front connector kit, Bottom cable output, Suitable for F15/F21 Series	
DIY-SC-FR-15-B-02-RGB	4 PIN Multi color DIY screw front connector kit, Bottom cable output, Suitable for F15/F21 Series	

Accessories List

DIY Connectors

Model	Description	Sample
DIY-SC-FR-15-D-01-SM-RGB	4 PIN Multi color DIY screw front connector kit, Cable with Male Connector. Direct cable output, Suitable for F15/F21 Series	
DIY-SC-FR-15-D-02-SF-RGB	4 PIN Multi color DIY screw front connector kit, Cable with Female Connector. Direct cable output, Suitable for F15/F21 Series	
DIY-SC-FR-15-B-01-SM-RGB	4 PIN Multi color DIY screw front connector kit, Cable with Male Connector. Bottom cable output, Suitable for F15/F21 Series	
DIY-SC-FR-15-B-02-SF-RGB	4 PIN Multi color DIY screw front connector kit, Cable with Female Connector. Bottom cable output, Suitable for F15/F21 Series	
DIY-SC-EXT-15-RGB	4 PIN DIY Splice connector, Suitable for F15/F21 Multi color Series	
DIY-SC-FR-16-D-01-A	2 PIN Mono color DIY screw front connector kit, Direct cable output, Suitable for F16 Series	
DIY-SC-FR-16-D-02-A	2 PIN Mono color DIY screw front connector kit, Direct cable output, Suitable for F16 Series	
DIY-SC-FR-16-D-01-RGB	4 PIN Multi color DIY screw front connector kit, Direct cable output, Suitable for F16 Series	
DIY-SC-FR-16-D-02-RGB	4 PIN Multi color DIY screw front connector kit, Direct cable output, Suitable for F16 Series	
DIY-SC-FR-16-D-01-SM-A	2 PIN Mono color DIY screw front connector kit, Cable with Male Connector. Direct cable output, Suitable for F16 Series	
DIY-SC-FR-16-D-02-SF-A	2 PIN Mono color DIY screw front connector kit, Cable with Female Connector. Direct cable output, Suitable for F16 Series	
DIY-SC-FR-16-D-01-SM-RGB	4 PIN Multi color DIY screw front connector kit, Cable with Male Connector. Direct cable output, Suitable for F16 Series	
DIY-SC-FR-16-D-02-SF-RGB	4 PIN Multi color color DIY screw front connector kit, Cable with Female Connector. Direct cable output, Suitable for F16 Series	
DIY-SC-END-16	IP67 End cap, Suitable for F16 Series	

Accessories List

DIY Connectors

Model	Description	Sample
DIY-SC-EXT-16-A	2 PIN DIY Splice connector, Suitable for F16 Mono color Series	
DIY-SC-EXT-16-RGB	4 PIN DIY Splice connector, Suitable for F16 Multi color Series	
DIY-PVC-END-16	PVC End CapSuitable for F16 Series	
DIY-PVC-END-15	PVC End CapSuitable for F15 Series	

Snap Connectors

Model	Description	Sample
DIY-SN-FR-15-D-01-A	2 PIN Snap DIY screw front connector kit, Right Direct cable output	
DIY-SN-FR-15-D-02-A	2 PIN Snap DIY screw front connector kit, Left Direct cable output	
DIY-SN-END-01-15	IP67 Snap End cap, Right	
DIY-SN-END-02-15	IP67 Snap End cap, Left	
DIY-SN-FR-15-D-01-DW	3 PIN Snap DIY screw front connector kit, Right Direct cable output	
DIY-SN-FR-15-D-02-DW	3 PIN Snap DIY screw front connector kit, Left Direct cable output	
DIY-SN-FR-15-D-01-RGB	4 PIN Snap DIY screw front connector kit, Right Direct cable output	
DIY-SN-FR-15-D-02-RGB	4 PIN Snap DIY screw front connector kit, Left Direct cable output	
DIY-SN-FR-17-D-01-A	2 PIN Snap DIY screw front connector kit, Right Direct cable output	
DIY-SN-FR-17-D-02-A	2 PIN Snap DIY screw front connector kit, Left Direct cable output	
DIY-SN-END-01-17	IP67 Snap End cap, Right	
DIY-SN-END-02-17	IP67 Snap End cap, Left	

01 (Right)

02 (Left)

Snap Connectors

Model	Description	Sample
DIY-SN-FR-21-D-01-A	2 PIN Snap DIY screw front connector kit, Right Direct cable output	
DIY-SN-FR-21-D-02-A	2 PIN Snap DIY screw front connector kit, Left Direct cable output	
DIY-SN-END-01-21	IP67 Snap End cap, Right	
DIY-SN-END-02-21	IP67 Snap End cap, Left	
DIY-SN-FR-21-D-01-DW	3 PIN Snap DIY screw front connector kit, Right Direct cable output	
DIY-SN-FR-21-D-02-DW	3 PIN Snap DIY screw front connector kit, Left Direct cable output	
DIY-SN-FR-21-D-01-RGB	4 PIN Snap DIY screw front connector kit, Right Direct cable output	
DIY-SN-FR-21-D-02-RGB	4 PIN Snap DIY screw front connector kit, Left Direct cable output	
DIY-SN-FR-16-D-01-A	2 PIN Snap DIY screw front connector kit, Right Direct cable output	
DIY-SN-FR-16-D-02-A	2 PIN Snap DIY screw front connector kit, Left Direct cable output	
DIY-SN-END-16	IP67 Snap End cap, Right	
DIY-SN-FR-16-D-01-SF-D3	3 PIN Snap DIY screw front connector kit, Right Direct cable output	
DIY-SN-FR-16-D-02-SM-D3	3 PIN Snap DIY screw front connector kit, Left Direct cable output	
DIY-SN-FR-16-D-01-SF-D4	4 PIN Snap DIY screw front connector kit, Right Direct cable output	
DIY-SN-FR-16-D-02-SM-D4	4 PIN Snap DIY screw front connector kit, Left Direct cable output	

Accessories List

Snap Connectors

Model	Description	Sample
DIY-SN-SP-15-A	Snap DIY Splice connector, Suitable for F15/F21 Series	
DIY-SN-SP-16-A	Snap DIY Splice connector, Suitable for F16 Series	

Middle Power Connector

Model	Description	Sample
MID-CNR-A-1T2	2 PIN, 1 to 2 Middle power connector	
MID-CNR-A-2T2	2 PIN, 2 to 2 Middle power connector	
MID-CNR-8904-1T2	3 PIN, 1 to 2 Middle power connector, Used for power extension of 8904 pixel LED neon	
MID-CNR-8904-2T2	3 PIN, 2 to 2 Middle power connector, Used for power extension of 8904 pixel LED neon	
MID-CNR-512B3-1T2	4 PIN, 1 to 2 Middle power connector, Used for power extension of 512B3 pixel LED neon	
MID-CNR-512B3-2T2	4 PIN, 2 to 2 Middle power connector, Used for power extension of 512B3 pixel LED neon	
MID-CNR-512C3-1T2	5 PIN, 1 to 2 Middle power connector, Used for power extension of 512C/512E pixel LED neon	
MID-CNR-512C3-2T2	5 PIN, 2 to 2 Middle power connector, Used for power extension of 512C/512E pixel LED neon	

Accessories List

End cap

Model	Description	Sample
SYZ-EC-M12-M-2C	2 PIN male end cap	
SYZ-EC-M12-F-2C	2 PIN female end cap	
SYZ-EC-M12-M-3C	3 PIN male end cap	
SYZ-EC-M12-F-3C	3 PIN female end cap	
SYZ-EC-M12-M-4C	4 PIN male end cap	
SYZ-EC-M12-F-4C	4 PIN female end cap	
SYZ-EC-M12-M-5C	5 PIN male end cap	
SYZ-EC-M12-F-5C	5 PIN female end cap	

Female & Male Wire Connector

Model	Description	Sample
SYZ-M12-F/M-2C-075-W	2 PIN Female & Male Connector with 0.3 wire	
SYZ-M12-F/M-3C-05-W	3 PIN Female & Male Connector with 0.3 wire	
SYZ-M12-F/M-4C-05-W	4 PIN Female & Male Connector with 0.3 wire	
SYZ-M12-F/M-5C-05-W	5 PIN Female & Male Connector with 0.3 wire	

Accessories List

Female & Male Wire Connector

Model	Description	Sample
KJ-M12-2P-F / KJ-M12-2P-M	2 PIN Female & Male Connector	
KJ-M12-3P-F / KJ-M12-3P-M	3 PIN Female & Male Connector	
KJ-M12-4P-F / KJ-M12-4P-M	4 PIN Female & Male Connector	
KJ-M12-5P-F / KJ-M12-5P-M	5 PIN Female & Male Connector	

Other Accessories

Model	Description	Sample
ACC-TOOL-C1	LED Neon Cutter	
ACC-TOOL-WS01	Wire Stripper	
ACC-TOOL-C2	Screwdriver, for the use of DIY accessories	
K-5905	Silicon Rubber, neutral PH, for the use of DIY accessories	
PCP-EU/UK	Power Cable, EU/UK standard plug with 1.5m cable length, 3*0.75mm	
RGB Power Cable RGB-CA10	RGB Power Cable 0.5mm *4, IEC stanard PVC material white color Cable length: 20m	
DMX Cable DMX-CA3/CA5/CA10	DMX Signal Cable Input: XLR-3/male Output: XLR-3/female Cable length: 3m/5m/10m	
ACC-TOOL-C3	Assistance tool, for the use of DIY front connectors	



Neon Strip At Fob-1 Dlf Cyber City (Gurgaon)



Neon Strip At Fob-2 Dlf Cyber City (Gurgaon)



FYZT-8318 at DLF Emporio Mall (Delhi)



DLF Crest (Gurgaon)



FYZT-501 Niche Light, FYML-137 Planter Light at DLF Crest (Gurgaon)



DURIN IP-65 Balcony Lights at DLF Skycourt



ABORÉ + FYZT-501 at The Skycourt, Sector-86 (Gurgaon)



DURIN IP-65 Balcony Lights at DLF Skycourt



BOLLARD at Queen's Court, GK-II (Delhi in 2012)



SEAL at UNI World City (Chennai)



FYZT-8021 POST TOP at The Fresco, Nirvana (Gurgaon in 2008)



FYZT-8021 POST TOP at Vatika City, Sector-49 (Gurgaon in 2006)



FYZT-8021 POST TOP and WALL BRACKET at UNI World Garden, Sector-47 (Gurgaon in 2005)



Step Light at The Crest (Gurgaon)



SQUADRO Lighting Column at The Crest (Gurgaon)



FYZT-501 at The DLF Skycourt, Sector-86 (Gurgaon)



FYZT-501 at The Crest (Gurgaon)



TETTRIS Post Top at The Primus, Sector-82, (Gurgaon)



SERIE at Unitech Villas (Gurgaon in 2008)



BELL at Unitech Horizon, Noida (UP)



ABORE at Karmalake lands, (Gurgaon in 2008)



CLIMA at DLF Jasola (Delhi)



Customised column fixture at UNI World Spa (Gurgaon)



Wall Light fixture at hotel (Jaipur)



SQUADRO at DLF Pinnacle (Gurgaon in 2007)



IRON Streetlight at DLF Alameda Township, (Gurgaon in 2011)



CANDLE-02 at Sidcul factory



FYZT 8035 at Unitech Nirvana Shopping Archade, South City-II (Gurgaon in 2006)



OPHELIA at Unitech Horizon, Noida (UP in 2008)



SERIE at Unitech Vista Villas in 2009



SHUTTLE at Gautam Budh University, Noida (UP in 2008)



CLIMA at Vatika City, Sohna Road, (Gurgaon in 2005)



FLOATING Indirect Customise Lighting Column at DLF Summit (Gurgaon in 2008)



CLIMA Year 2008 at Unitech Fresco South City-II (Gurgaon)



SQUADRO (FYZD-132) at DLF Cyber City (Gurgaon)



Architectural Outdoor & Commercial Lighting

****Copyright Notice****

The information, descriptions and illustrations herein are of only an indicative nature. Due to advanced developments, we may be required to alter the characteristics of our products without notice. We invite you to consult us.

**Graphic Design / Art Direction:
Manya Narula**



Architectural Outdoor & Commercial Lighting

Trilok Chand and Sons Pvt. Ltd.
5, Khatri Plaza, 1st Floor
New Rajender Nagar
New Delhi - 110060, India
www.bagotilighting.com